

*****READ & SAVE THESE INSTRUCTIONS *****
ACCESS LIGHTING
MODEL 23636,23637
INSTALLATION & OPERATION INSTRUCTIONS

(1) TOOLS AND MATERIALS REQUIRED

- ❖ STAR SCREW DRIVER
- ❖ WIRE CUTTERS
- ❖ WIRING SUPPLIES AS REQUIRED BY ELECTRICAL CODE
- ❖ 1 x 60W/A-19/Medium Base Bulb

Attention:

Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

(2) GENERAL

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended for mounting to a standard 4" x 2 1/4" deep metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.
4. Before commencing with the installation, **disconnect the power by turning off the circuit breaker** or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:

The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

(3) UNPACKING THE FIXTURE

On checking the contents of the box you will find;

- ❖ Mounting Hardware
- ❖ Universal Crossbar
- ❖ Fixture Canopy
- ❖ 1 x Metal Shade

(4) PREPARE THE FIXTURE

Refer to attached illustration of fixture parts and assembly.

1. If you are replacing an existing fixture disconnect and remove the old fixture. Expose the **Supply Wiring** from the outlet box.
2. Fit the **Rod** with the attached **Sloped Ceiling Adapter Pivot Ball** through the hole in the **Canopy**.
3. Determine the desired length of your fixture. Feed the **Fixture Wire** through the desired **Rods** and then screw the desired **Rods** together and secure the **Lowest Rod** to the nipple protruding from the **Metal Shade** of the **Fixture** and the top rod to the **Sloped Ceiling Adapter Pivot Ball**.
4. Secure the **Crossbar** to the junction box with the supplied **Mounting Screws**. Make sure that the two **Arms** of the **Crossbar** faces downward.
5. Connect the **BLACK supply wire** to the **Black wire** of the fixture with supplied **Wire Nuts** ensuring a secure connection.
6. Connect the **WHITE supply wire** to the **White wire** from the fixture a secure with supplied **Wire Nuts**.
7. Attach the **ground (GREEN) wire** from the fixture to the **outlet box ground terminal** (or to the box ground wire).
8. Secure all wire nuts connections with **UL listed electrical tape**.
9. Position the **Fixture Canopy** over the arms of the **Crossbar**, ensuring that the holes on the **Arms** of the **Crossbar** align with the **Holes** on the sides of the **Fixture Canopy**. Secure the **Fixture Canopy** to the **Crossbar** with the supplied **Screws**.
10. **Insert 1 x 60W/A-19/Medium Base Bulb. DO NOT EXCEED WATTAGE SPECIFIED ON WARNING LABEL**
11. Restore electricity and check the operation of your new lighting fixture.


CAUTION:

- **Ensure that the Fitting is Cool and Switched off, Before Changing the Bulb.**
- **Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.**
- **Do not Place the Fixture in Close Proximity to Combustible Material**

a c c e s s

L I G H T I N G

MODEL 23636/23637

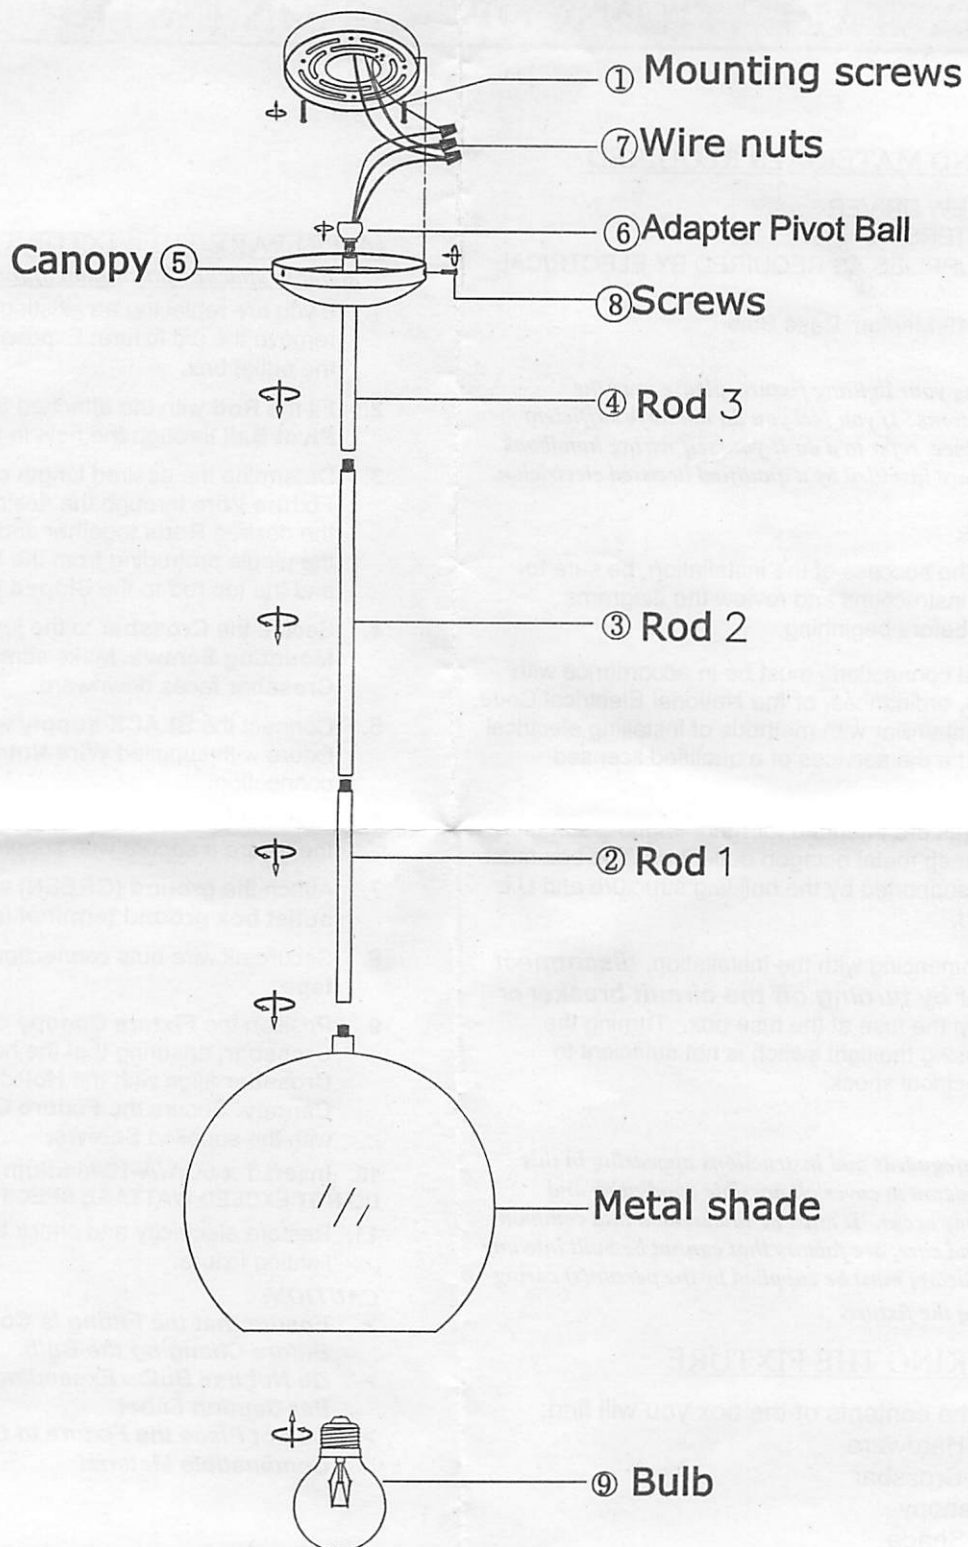

access

LIGHTING