

*****READ & SAVE THESE INSTRUCTIONS *****
ACCESS LIGHTING
MODEL 62242
INSTALLATION & OPERATION INSTRUCTIONS

(1) TOOLS AND MATERIALS REQUIRED

- ❖ BLADE SCREW DRIVER
- ❖ WIRE CUTTERS
- ❖ WIRING SUPPLIES AS REQUIRED BY ELECTRICAL CODE
- ❖ 2 x 60W/B10/E26/Medium Base Bulb

Attention:

Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

(2) GENERAL

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended for mounting to a standard 4" x 2 1/4" deep metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.
4. Before commencing with the installation, **disconnect the power by turning off the circuit breaker** or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:

The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

(3) UNPACKING THE FIXTURE

On checking the contents of the box you will find;

- ❖ Mounting Hardware
- ❖ Fixture Back Plate
- ❖ Fixture Canopy with Socket Assembly
- ❖ 2 x Opal Glass Diffuser
- ❖ 2 x Silicon Band
- ❖ 1 x Allen Key
- ❖ 4 x Allen Screws

(4) PREPARE THE FIXTURE

Refer to attached illustration of fixture parts and assembly.

1. If you are replacing an existing fixture disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
2. Place the Supply wires through the center hole in the **Fixture Back Plate**. Secure the **Fixture Back Plate** to the junction box with the supplied **Mounting Screws (1)**,
3. Connect the **BLACK supply wire** to the **Black wire** of the fixture with supplied **Wire Nuts (2)** ensuring a secure connection.
4. Connect the **WHITE supply wire** to the **White wire** from the fixture a secure with supplied **Wire Nuts (2)**.
5. Attach the **ground (GREEN) wire** from the fixture to the **outlet box ground terminal** (or to the box ground wire).
6. **Secure all wire nuts connections with UL listed electrical tape. Tuck wires carefully into Junction box.**
7. Secure the **Fixture Canopy with Socket Assembly** to the **Fixture Back Plate** by Lining up the holes on the sides of the **Fixture Back Plate** and **Fixture Canopy**. Secure with the supplied **Retaining Screws (3)**.
 - ❖ Insert the **1 x 60W/B10/Medium Base Bulbs (4)** into the socket at the top of the fixture and **1 x 60W/ B10 /Medium Base Bulbs (4)** into the bottom socket.**DO NOT EXCEED WATTAGE SPECIFIED ON WARNING LABEL.**
8. Slide the **Top Opal Glass Diffuser (5)** to the fixture by aligning the securing with the supplied **Allen Screws (6)** using the supplied Allen Key. Repeat procedure with the lower **Opal Glass Diffuser**.
9. Restore electricity and check the operation of your new lighting fixture.


CAUTION:

- **Ensure that the Fitting is Cool and Switched off, Before Changing the Bulb.**
- **Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.**
- **Do not place fixture on or near combustible material.**

05092010ISIPV

a c c e s s

L I G H T I N G

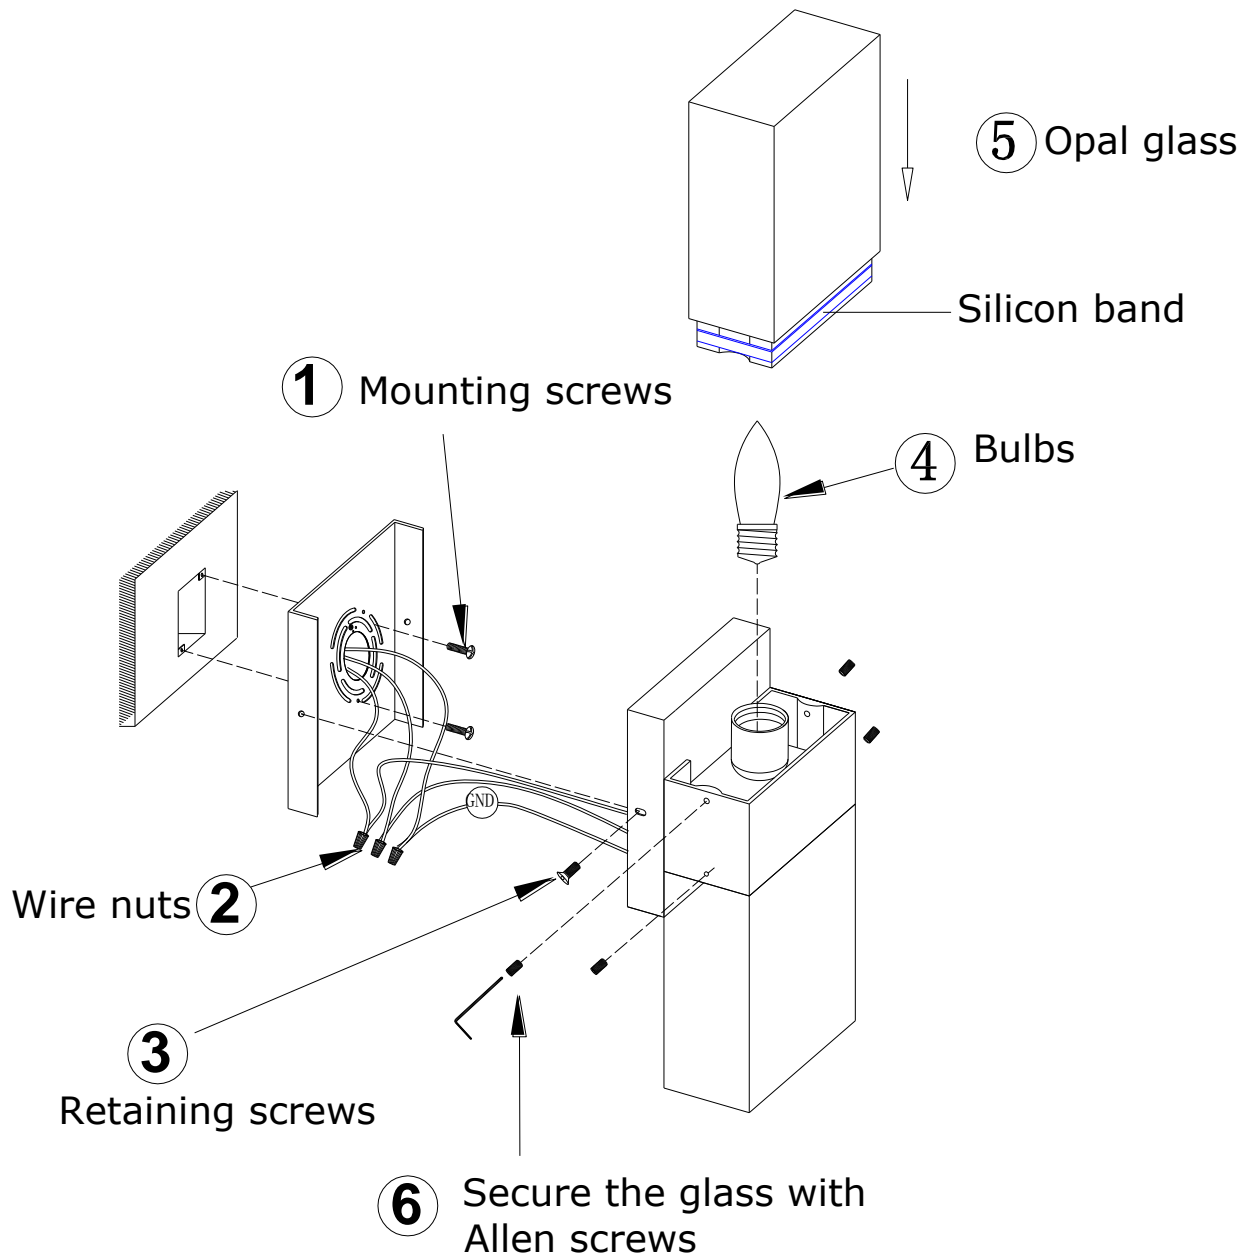

a c c e s s

L I G H T I N G

05092010ISIPV