


# 145.1170 | Floor Mounted Tub Filler With Hand Held Shower





#### SPECIFICATIONS:

- · Solid Brass construction includes valve
- Floor Mount Installation
- Hand Shower Flow Rate = 2.0 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 9.0 GPM Spout Flow Rate.
- Single Lever allows both volume and temperature control

#### FINISHES:

• Chrome - 145.1170CP

#### **STANDARDS:**

• ASME A112.18.1 / CSA B125.1


**Legislation Compliance** 








## **Technical Diagram**

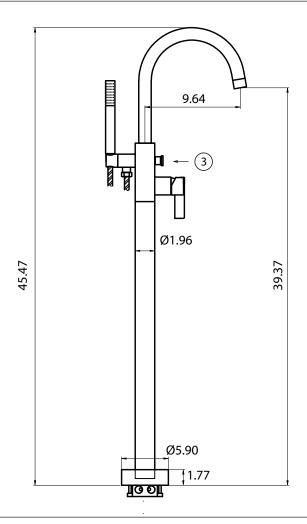





### **Part Number Guide:**

- (1) Cartridge 100.1170-9853
- (2) Aerator 100.1170-2364
- (3) Push / Pull Diverter 100.1170-1991CP Chrome