SLV-5440

SPEAKMAN[®]

SentinelPro™ Diverter Trim and Shower Package (Valve not included)

FEATURES:

- CPT-5401: Diverter Shower Valve Trim
- VS-100-PC: Hand Held Shower with Pause/Trickle Button
- VS-115: Supply Ell with Wall Flange
- VS-123: 30 in. Slide Bar
- 69 in. Metal Stainless Steel Hose

VALVE OPTIONS:

- CPV-TP-DV: Thermostatic/Pressure Balancing Diverter Valve Sweat & Thread Connections
- CPV-TP-DV-PXC: Thermostatic/Pressure Balancing Diverter Valve PEX F1807 Crimp Inlet Connections
- CPV-TP-DV-PXE: Thermostatic/Pressure Balancing Diverter Valve PEX F1960 Cold-Expansion Inlet Connections

STOCK FINISHES:



WARRANTY:

Visit www.speakman.com for full product warranty information
• See Speakman.com For Warranty Information



Information continues on next page


Architect/Engineer	Approval	Space:
--------------------	----------	--------

P: 800-537-2107 F: 800-977-2747 W: WWW.SPEAKMAN.COM R: 02-DECEMBER 2019

SLV-5440

SPEAKMAN®

SentinelPro[™] Diverter Trim and Shower Package (Valve not included)

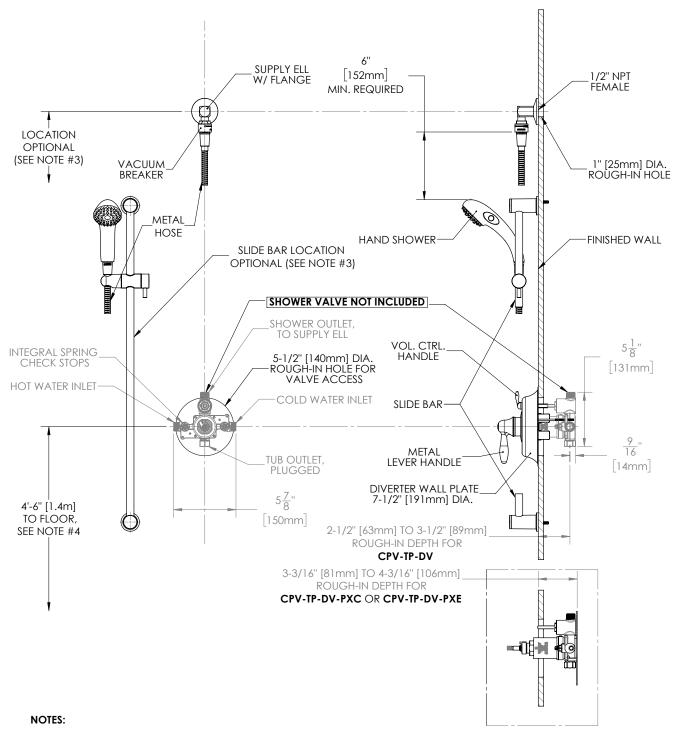

- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT 1. NOTICE.
- ALL INLETS AND OUTLETS ARE 1/2" FEMALE COPPER SWEAT AND 1/2" MALE NPT UNLESS OTHERWISE SPECIFIED. THE LOCATIONS OF THE SLIDE BAR AND SUPPLY ELL ARE OPTIONAL, BUT RESTRICTED BY THE 69" HOSE LENGTH RUNNING FROM THE SUPPLY ELL CONNECTION TO THE HAND SHOWER AND THE 6" MINIMUM REQUIREMENT BETWEEN THE IN-LINE VACUUM BREAKER AND TOP OF THE HAND SHOWER (HAND SHOWER ADJUSTED TO HIGHEST POSITION). FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS. 2 3.
- 4

Architect/Engineer Approval Space:	P: 800-537-2107
	F: 800-977-2747
	W: WWW.SPEAKMAN.COM
	R: 02-DECEMBER 2019