
Hotelier Single Light

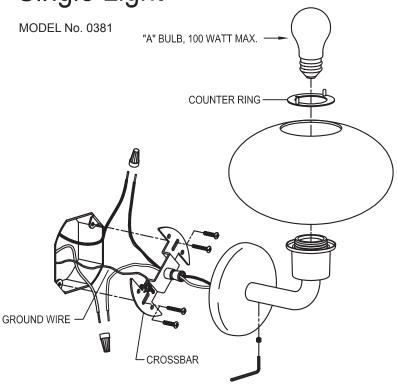

INSTALLATION:

- PROVIDE THE REQUIRED WIRING TO THE WALL ELECTRICAL BOX. THE ELECTRICAL BOX SHOULD BE FLUSH TO THE WALL.
- 2. MOUNT CROSSBAR TO THE ELECTRICAL BOX. THE CROSSBAR SHOULD BE FLAT AGAINST THE WALL WITH THE SPINDLE FACING AWAY FROM THE WALL.
- CONNECT HOUSE GROUND WIRE TO THE CROSSBAR WITH ATTACHED GROUNDING SCREW.
- 4. FEED THE FIXTURE WIRES THROUGH THE CENTER HOLE OF THE CROSS-BAR.
- CONNECT THE WHITE WIRE OF THE FIXTURE TO THE HOUSE NEUTRAL WIRE WITH A WIRENUT.
- CONNECT THE BLACK WIRE OF THE FIXTURE TO THE HOUSE HOT WIRE WITH A WIRENUT.
- SLIDE THE FIXTURE OVER THE SPINDLE OF THE CROSSBAR UNTIL IT IS FLUSH
 AGAINST THE WALL. SECURE THE FIXTURE BY TIGHTENING THE SET SCREW
 ON THE POST WITH PROVIDED WRENCH. TAKE CARE WIRES ARE NOT
 PINCHED DURING THIS PROCESS.
- 8. POSITION GLASS SHADE ONTO FIXTURE, CAREFULLY TIGHTEN COUNTER RING.
- 9. INSTALL LIGHT BULB.

INSTALLATION INSTRUCTIONS:

THESE LIGHTS SHOULD BE INSTALLED BY A LICENSED CONTRACTOR

NOTE: LIGHT CAN BE MOUNTED INVERTED

SAFETY: TO PREVENT ELECTRICAL SHOCK, BE SURE THAT THE POWER IS OFF BEFORE STARTING INSTALLATION.

