

access

LIGHTING

INSTALLATION INSTRUCTIONS



COLLECTION

Delta

APPLICATION

Line Voltage
Ceiling pendant

MODEL NO.

9032LV

IMPORTANT

Before assembling your ACCESS LIGHTING fixture, please make sure that you carefully read through this instruction sheet. Save this instruction sheet and refer to it when additions to or changes in the fixture configuration are made.

Enregistrer cette feuille d'instructions et de s'y référer lorsque les ajouts ou changements dans la configuration de montage sont faites.

Consider having your fixture installed by a qualified licensed electrician.

NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized

STEP-BY-STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

IMPORTANT SAFETY INSTRUCTION

MESURES DE SECURITE A RESPECTURE

Consult a qualified electrician to ensure correct branch circuit conductor.

Consulter un electricien qualifie pour vous assurer que les conducteurs de la derivation sont adequats

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Ce produit doit etre installe selon le code d'installation pertinent, par une personne qui connait bien le produit et son fonctionnement ainsi que les risques inherents

Do not install this fixture in hazardous locations.

N'installez pas cet appareil dans des emplacements dangereux

Do not install fixture assembly closer than 6 inches from any curtain or similar combustible material. Laisser une distance d'au moins 6 pouces entre ce luminaire et la toute surface combustible.

WARNING: Risk of Fire and Electric Shock


CAUTION: Risque d' Incendie et de Choc Electriques

WHAT WE PROVIDE

- Fixture Assembly
- Mounting Hardware
- 1 x Glass diffuser
- 1X 40W G9 Bulb

WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by the Electrical Code

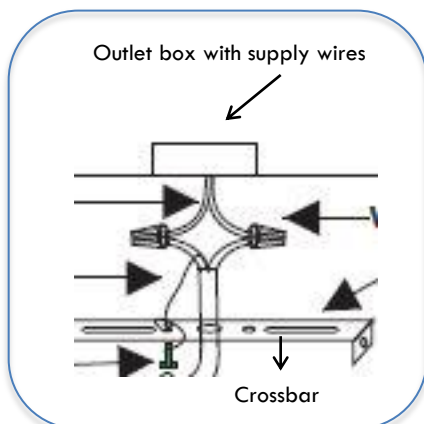

1


PREPARE FIXTURE

If there is an existing fixture remove it.

Expose the supply wire from the outlet box.

Secure the crossbar to the J-box with the supplied screws ensuring that the arms of the crossbar face down towards the ground. Place the two supplied screws into the arms of the crossbar. Don't tighten down all the way.

Feed the supply wires through the outlet box.

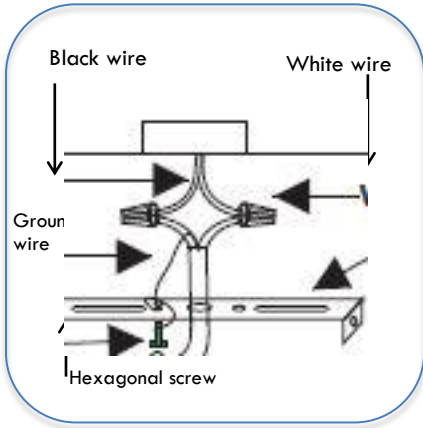


2

CONNECT THE WIRES

Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the fixture wire. Secure with the supplied wire nuts. Either wrap the outlet box grounding (green) wire around the green hexagonal screw provided on the mounting plate or connect it to the supply ground wire provided with the fixture. Secure all wires with U.L Certified electrical tape (not supplied).

Tuck all wires carefully into the J-box.

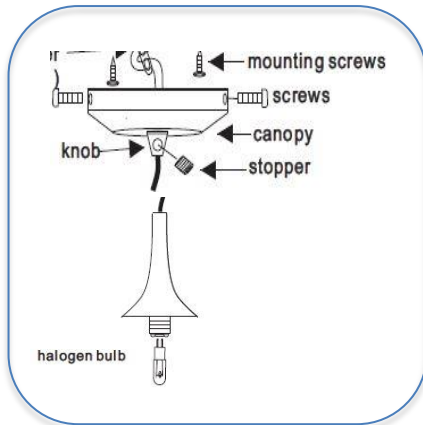


3

MOUNT THE CANOPY & INSERT THE BULB

Mount the fixture canopy over the crossbar and fit the screws in the crossbar arms into the L-shaped slits in the canopy. Tighten screws to secure. Then screw stopper onto the knob (below the canopy).

Insert the supplied bulb into the sockets using a soft cloth to handle bulb. **Do not touch bulb directly.**

Do not exceed the wattage as per CAUTION LABEL.

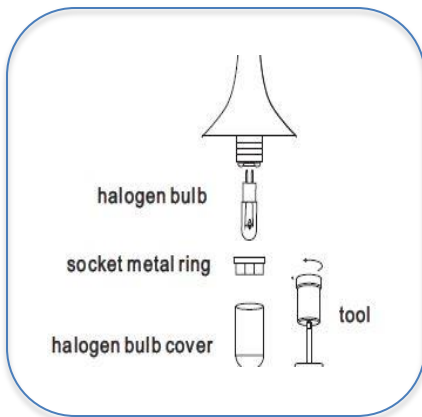

4

SECURE THE GLASS SHADE

Fix your new glass shade (not supplied) secured by the socket metal ring using the supplied tool.

Place the halogen bulb cover over the lamp by twisting onto the threaded portion of the socket.



5

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS LIGHTING FIXTURE

CAUTION

Please ensure that the fitting is cool and switched off before replacing the bulb. **DO NOT** use bulbs that might exceed the maximum wattage as stated on caution label.