

# THREE STATION A.D.A. FLOOR MOUNTED SINK WITH TUBULAR LEGS & CROSS BRACING

## WITH/WITHOUT MANUAL FAUCETS



8 1/2" high backsplash.

5" sink bowl depth.

Two stainless steel "Z" brackets.

One K-6 3 1/2" rear basket drain.

Tubular stainless steel legs with flanged feet. Side adjustable cross-bracing with leg clamps.

Manual Operated: Faucets sold separately.

**"-F" Series** includes three **K-161-LU** 3 1/2" gooseneck faucets with wrist handles.

#### **CONSTRUCTION:**

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.



"-F" Series Sink Includes K-161-LU Gooseneck Faucets with Wrist Handles

Item #:	Qty #:	_
Model #:		
Project #:		_









#### **MATERIAL:**

All 14 gauge type "304" stainless steel.

1 5/8" tubular "304" stainless steel legs & cross-bracing. Stainless steel gussets.

#### **MECHANICAL:**

8" O.C. faucet holes punched at each station.

		# of Faucets Sink	# of Faucets		Cu.
Model #	Length	Accommodates	Included	Wt.	Ft.
FS-FM-60-ADA	60"	3	0	110 lbs.	22
			(Faucets Not Included)		
FS-FM-60-ADA-F	60"	3	3	116 lbs.	22
			(K-161-LU Faucets Included)		

Click Here For Install Guide

#### **MULTI-STATION ACCESSORIES & REPLACEMENT PARTS Description** QTY: ₩ K-6 3 1/2" Drain (1 1/2" I.P.S.) **F** K-13 Stainless Steel Soap Dispenser (Wall Mount Only) **₩** K-06 Splash Mount Faucet Mounting Kit **K-101** 8" Swing Spout Splash Mt. Faucet K-161-LU K-159 Splash Mounted 3-1/2" Gooseneck Faucet (8" O.C.) **K-159 F** K-160 Splash Mounted 6" Swivel Spout Faucet (8" O.C.) K-160 **F** K-411 Strainer Plate for 3-1/2" Drain **K-1118** Extra H.D. 8" Splash Mounted Faucet K-316-LU Wrist Handles K-472 Faucet Hole Revision (Manual Faucet Operated Sinks Only) K-508 Special Sizing Charge (Larger Size Cut Down To Smaller Size) K-13 **TA-19** Adjustable Stainless Steel Flanged Bullet Foot

= Ships UPS

Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.

MARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.




Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:


Email: customer@advancetabco.com or Fax: 631-242-6900


For Smart Fabrication™ Quotes: Email: smartfab@advancetabco.com or Fax: 631-586-2933 TOL ± .500" FITTINGS SUPPLIED AS SHOWN ALL DIMENSIONS ARE TYPICAL

### FS-FM-60-ADA

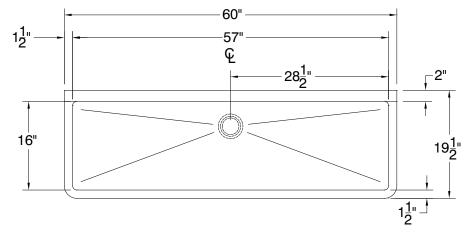



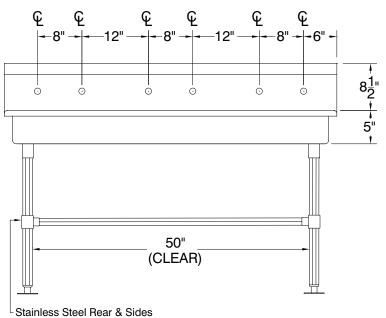



110 Lbs.



Adjustable Cross-Bracing