



ALLEGRI®




BY KALCO LIGHTING™

Warning:

Do not hold the fragile fixture body!!!

Please tear away the film and white paper after installing the fixture!

Please lift up the following iron SQ tube cross bracket when installing, do not hold or lift fixture from crystals.

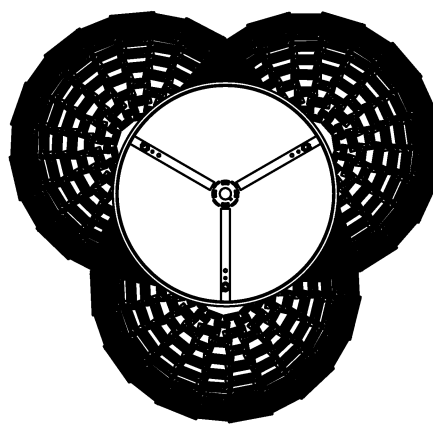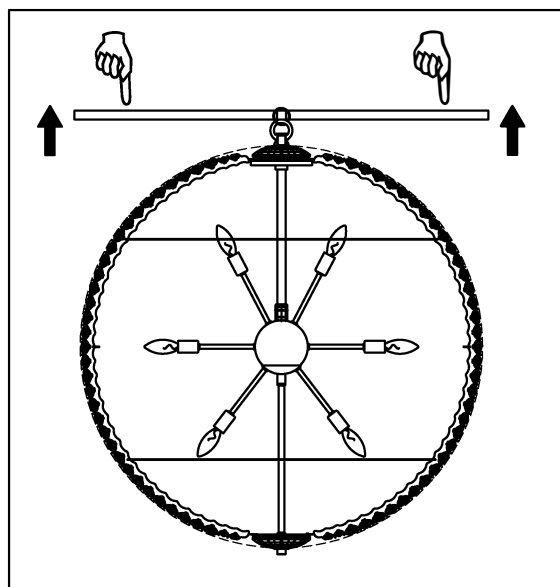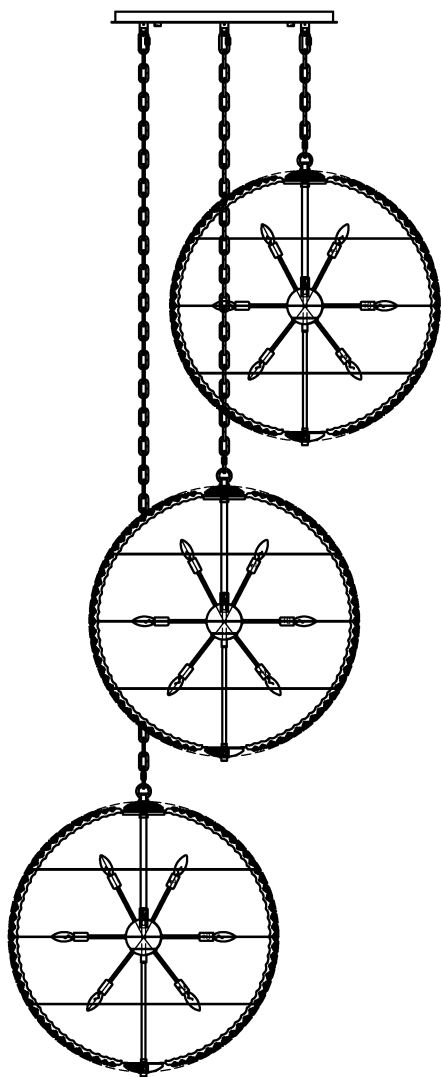

Top View

MODEL 037248

ASSEMBLY AND DRESSING INSTRUCTIONS

Blending innovative design, cutting-edge technology and the grace and elegance of traditional crystal, ALLEGRI® proudly brings you a new approach to lighting. ALLEGRI® fixtures are made from the finest raw materials and are brought to life through a combination of traditional manufacturing, such as sand casting, hand-forging and technology driven techniques including laser cutting.

Enclosed are detailed instructions on how to properly install your fixture. Please read all instructions carefully. If you need further assistance, please contact the dealer from which you purchased this product or call 800-525-2655 to speak with an ALLEGRI® customer service representative. We hope you enjoy your fixture!





ALLEGRI®


BY KALCO LIGHTING

CANOPY MOUNTING INSTRUCTIONS

Wiring Diagram

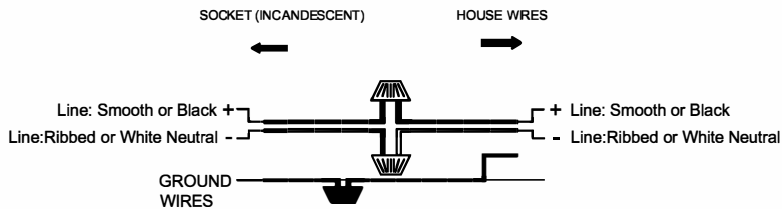

All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.

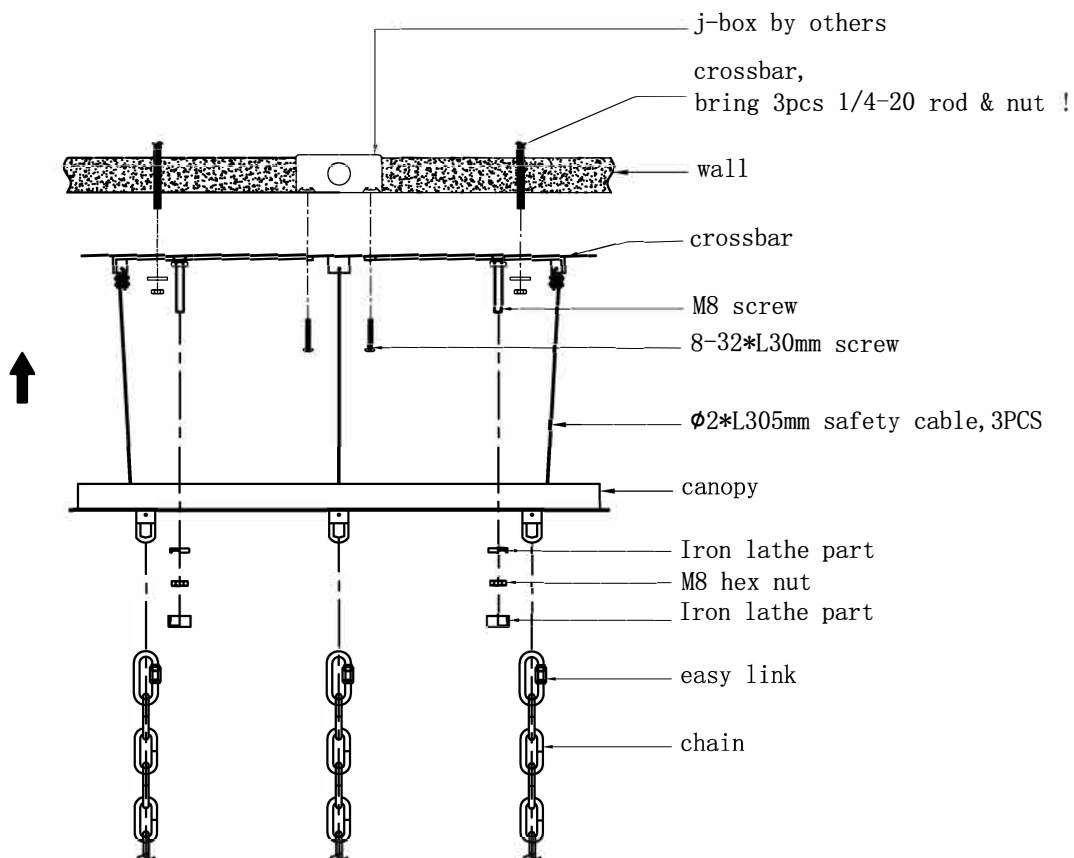

INSTALL CANOPY AS FOLLOWS

CAUTION: Be sure power is off at the main breaker box prior to installation.

1. Disconnect the power supply.
2. Take all accessories from the accessories box.
3. Pre-mount 3pcs 1/4-20 thread rods according to the holes position of crossbar.
4. Fix crossbar on ceiling by 1/4-20 hex screws.
5. Connect crossbar and canopy by 3pcs Ø2*L305mm safety cable.
6. Adjust the length of chain and hang it on the loop of canopy with easy link.
7. Hang the lamp body on the chain with easy link.
8. Connect the main line of lamp body with the power output line, please refer to wire diagram.
9. Move the canopy up close to ceiling and fix it with iron lathe part.



ALLEGRI®

BY KALCO LIGHTING™


FRAME ASSEMBLY INSTRUCTIONS

MODEL 037248

WARNING



Electrical Danger




Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.




You will need 48 - Cand.Bulb
40 Watts Recommended
40 Watts Max
Bulb not included

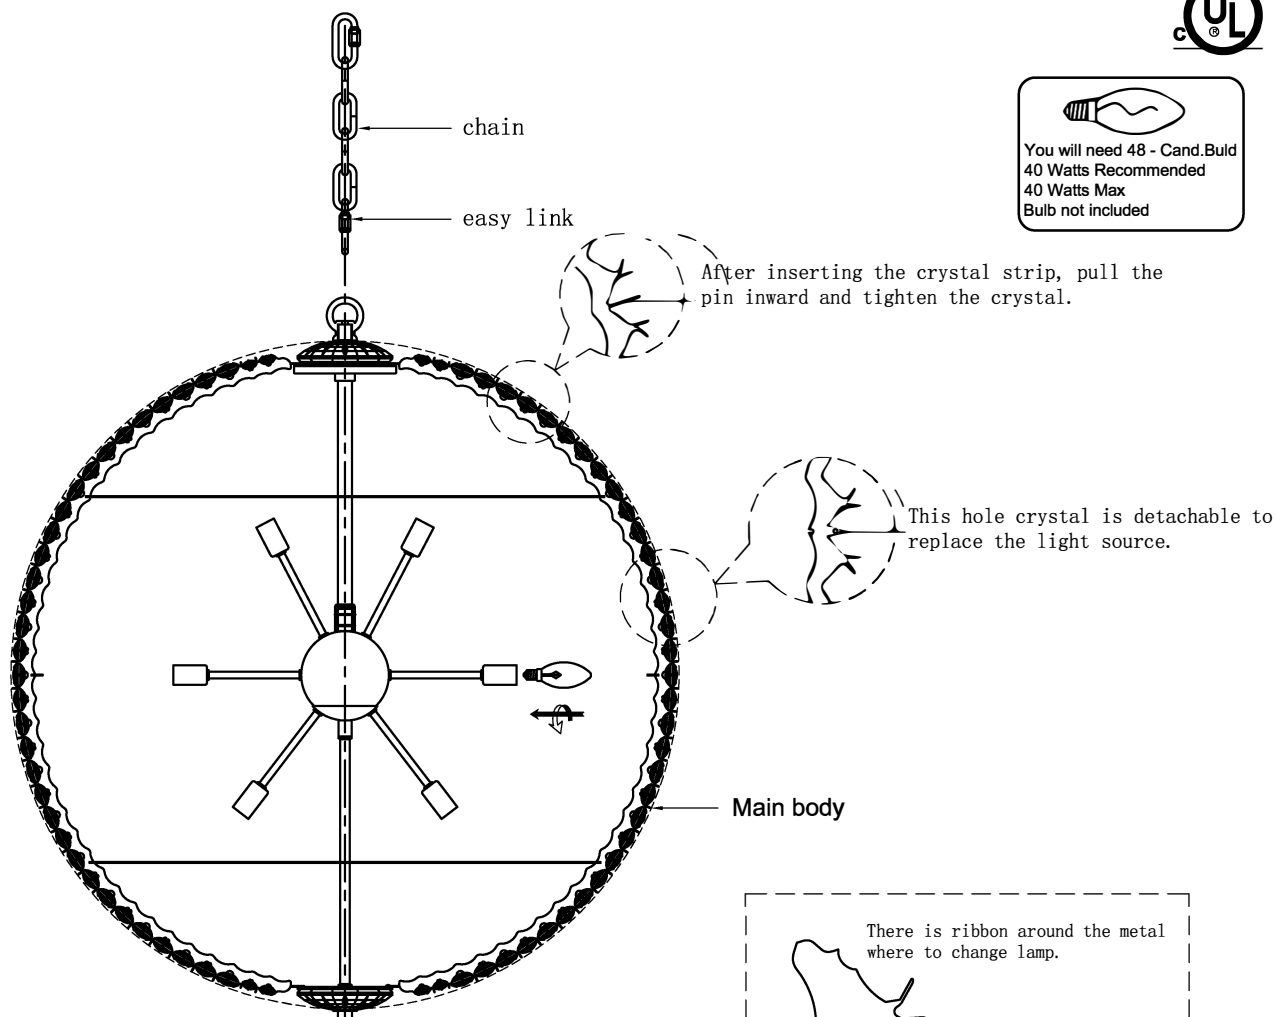

INSTALLATION

- Remove the crystal strip as shown in the picture, rotate the light source to the lamp holder, and then fix the crystal strip on the lamp body with a spherical carriage.
- Check the installation.

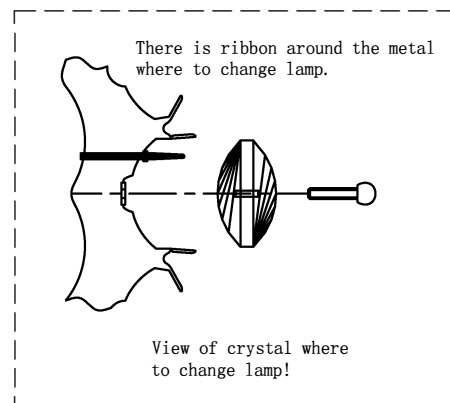



LIGHTING CARE INFORMATION

Every ALLEGRI® fixture is of heirloom quality and will last for generations. To ensure it retains its brilliance and splendor for years to come, proper care and regular cleaning are necessary.

It is recommended that ALLEGRI® fixture, and particularly their crystal trim, be lightly dusted with a feather or lambs wool duster, or soft brush every two months, or whenever it appears dull or dusty. A thorough cleaning should be completed every six months.

Before cleaning an ALLEGRI® fixture, first locate the fixture's trim diagram. This will assist in replacing the crystal trim in its proper location after cleaning. Should a replacement trim diagram be required, please call 866-820-2665 to speak with an ALLEGRI® customer service representative, who can provide a new diagram.

ALLEGRI® recommends several different cleaning methods, depending on the type of fixture. Some fixtures can be cleaned with limited removal of crystal, while others must be completely untrimmed.

Place a soft towel or blanket directly beneath the fixture to limit the damage to both the crystal and the surface below the fixture, should a piece of crystal be dislodged during the cleaning process. Extreme care must be taken around any electrical fixture. For personal safety and the safety of the fixture, be sure that the fixture has been turned off. Never rotate or spin the fixture as this can cause the fixture to lose support and fall. Instead, move around the fixture while cleaning.

White Glove Method

Prepare a cleaning solution of one part isopropyl alcohol to three parts distilled water and place in a clean spray bottle.

Do not use packaged cleaning fluids, as many of these contain ammonia, which may degrade the finish of the fixture and the quality of the crystal.

Wearing white cotton gloves, spray one glove with the solution and keep one dry. Gently polish each crystal with the damp glove and immediately wipe it with the dry glove. Do not tug or pull on the crystal, as this may cause the connectors to chip or crack the crystal, or dislodge it from the fixture.

Warning: To reduce the risk of personal injury due to fire and/or electric shock, never spray solution at or near the fixture.

Crystal Removal Method

Gently remove trim and hand-wash the crystal in lukewarm water using a mild detergent. Rinse in clean water and dry with a soft clean cloth. Do not soak finished crystal such as SWAROVSKI ELEMENTS Colors: Teak, Golden Shadow or Silver Shade, for extended periods, as this may degrade the crystal's finish.

With the fixture untrimmed and turned off, wipe the frame, including the light bulbs once they are completely cool, with a soft cloth.

Wearing white gloves, finger-cots or using a soft clean cloth, gently replace the trim as directed in the trim diagram.