



MODEL TP

ASME TEMPERATURE AND PRESSURE RELIEF VALVE

(18C400 Series)

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

Bronze automatic temperature and pressure relief valves used for protection of hot water heaters and storage tanks. Protects against elevated temperature and pressure.

FEATURES

- ASME Section IV Certified Capacity (3/4")
- CSA Listed and Certified to ANSI Z21.22
- 125 and 150 psig Set Pressures @ 210°F max
- Corrosion Resistant Construction
- Coated Element Protects Against Corrosion
- Extended Body Option for Insulated Vessels
- Made in the USA

MATERIALS

Body: ASTM B584 Bronze
 Spring: Stainless Steel
 Seat: Silicone
 Thermostat: Copper, Nylon coated, Wax-filled

CAPACITY

ELEMENT LENGTH	SIZE	CSA CAPACITY BTU/Hr	ASME CAPACITY BTU/Hr
1-1/2" & 3"	1/2"	15,000	N/A
1-1/2"	3/4"	95,000	500,000
3" AND 8"	3/4"	105,000	500,000

APPROVALS



ASME Section IV Heating Boilers (3/4" 18C402 only)
 ANSI Z21.22 Relief Valves for Hot Water Systems
 Canadian Registration Number 0G1438.6C
 Meets HUD/FHA Requirements




OPTIONS

- 1/2" NPT 3/4" NPT
- Extended Body inlet, 3/4" Only (18C402X)
- 1-1/2" Element 3" Element 8" Element
- Set pressure (125, 150 psig)

DIMENSIONS

Model #	ITEM #	SIZE	A	B	C
TP-1-12	18C401	1/2M x 1/2F	1.13 (29)	1.63 (42)	2.00 (51)
TP-*-34	18C402	3/4M x 3/4F	1.25 (32)	1.63 (42)	1.80 (46)
TP-3-34X	18C402X	3/4M x 3/4F	1.25 (32)	1.63 (42)	4.0 (101)

All dims in inches (mm)
 * - Element length

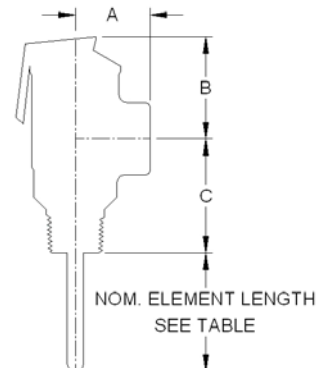

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA; www.apollovalves.com ; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.