


AQT6236TR COL

Without Seat

	by Aquanus				
CUSTOMER:				One Signature Required	
JOB NAME:			THE PROPERTY OF STATE	//	
PO #:	QUOTE #	PLU	UMBING CONTRACTOR APPROVAL	DATE	
DATE:	QUANTITY: L R	G	ENERAL CONTRACTOR APPROVAL	//	
				//	
SHIP TO:			ENGINEER APPROVAL	DATE	
			ARCHITECT APPROVAL	//	
	To complete your order, this document must be signed a quotes@americanbathgr				
STANDARI	D FEATURES	Int. Dim.	60 W x 34 D x 76 ¾ H		
- Pre-levele		Ext. Dim.	66 W x 36 1/8 D x 78 3/4 H		
	applied acrylic surface	Skirt Ht.	½ skirt, ½ COL exterior threshold		
 ½" skirt 		Packaged Wt.			
	exterior threshold	Material	AcrylX™ applied acrylic		
	nt when properly installed ont drain outlet	Warranty	30-year warranty*		
	ront trench drain		* See terms and conditions for details	inches	
	nited warranty	OPTIONAL A	ACCESSORIES (available for all m	odels)	
- 12" x 24" subway tile		Stainless steel vertical bar 24" x 11/2" (entry wall)			
 Slip resist 	tant, textured bottom [ASTM F-462]		RH Both	1	
			o dish (12½ W x 3½ D x 11½H), s o dish (7 W x 3½ D x 11½H), ship		
	RATION (handed by fixture wall)		d, shipped loose	ped 1003e	
	forced for future accessory installation		urtain, shipped loose		
Fixture wo		☐ Brass drain	n		
□ Optic	onal vertical bar reinforcement (entry wall) I	Colors:			
_	figured — ADA		□ White□ Biscuit□ Bone		
	/all (must choose one) □ LH □ RH □ Back Wall		contact customer service for custom c	color aptions)	
Includes t	two stainless steel 24" x 11/2" grab bars located on the	☐ Additional		solor ophono,	
	and one stainless steel 48" x 11½" grab bar located on				
	wall, per ADA guidelines. (std config)				
	y-installed plumbing options per ADA requirements land-held shower assembly, 30" slide bar and 60" hose				
	ressure balancing mixing valve				
CUSTOM (OPTIONS (not available if ADA configuration is selected)		500		
Grab bars:	or thought the first are made in a part to might all on to establish				
	zontal U-shaped bars: 24" (side walls), 48" (back wall)				
	cal bar 24" (entry wall) 🔲 LH 🔲 RH 🔲 Both				
Grab Bar fin					
	less steel (1½" dia.) Jer-coated white (1¼" dia.)				
	istalled plumbing options per ADA requirements				
	l-held shower assembly, 30" slide bar and 60" hose				
	ure balancing mixing valve	$\ \ _{\mathcal{A}}$			
Fixture wo	all 🗌 LH 🔲 RH 🔲 Back wall				
Grate: ☐ Stain!	less steel				
☐ White					
	per-proof				
·		A		/	






by Aquarius

Without Seat

ADA/ANSI compliant when fully equipped and installed according to guidelines.



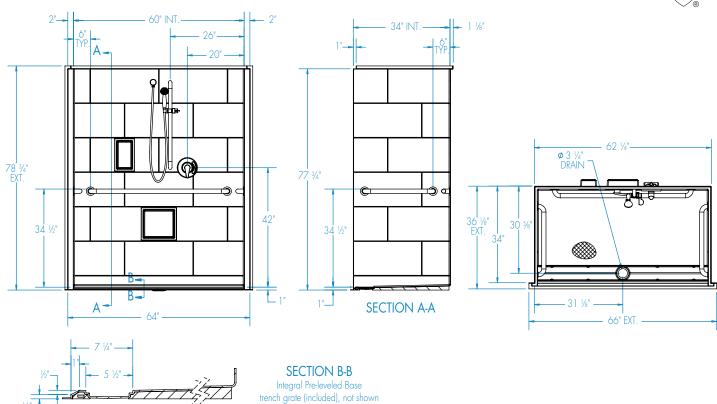

FEATURES Ibs Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower AQT6236TR COL	AcrylX™ applied acrylic	Smooth tile	1	Center Front	$\frac{1}{2}$ " skirt $\frac{1}{2}$ " exterior COL threshold	200	210

DIMENSIONS

Specifications	inches (mm)		
Width: Ext. / Int.	66 / 60		
Depth: Ext. / Int.	36 1/8 / 34		
Height: Ext. / Int.	78 ¾ / 76 ¾		
Enclosure Opening:	60		
Skirt Height:	1/2		
Drain Rough-In (from Back Wall)	30 5 ⁄8		
Drain Rough-In (from Side Wall)	31 1/8		

FRAMING DIMENSIONS inches (mm)

Туре	D Depth	W Width	H Height	Α	В	С
Alcove	34	62 1/4	-	Box Out	31 1/8	30 %

