

FEATURES

High flow thermostat cartridge

Universal inlets for 3/4" and 1/2" connections (built-in female threads for 1/2" connections and male threads for 3/4" connections)

Reversible service check valves with filters and improved stop mechanism

Italian made nickel plated solid brass rough and Vernet thermostatic cartridge

Shut-off valve outlets: connections right, left or both sides simultaneously

Designed to be installed vertically or horizontally

Removable NPT plug at the top for an extra independent shut-off valve (**#1206**) or diverter with stop (**#61934**) connection



flow rate: 12 gpm at 45 psi

WARRANTY

Residential: Limited lifetime warranty to original purchaser

Commercial: Two years warranty

(Complete warranty available at www.aquabress.com/warranty)

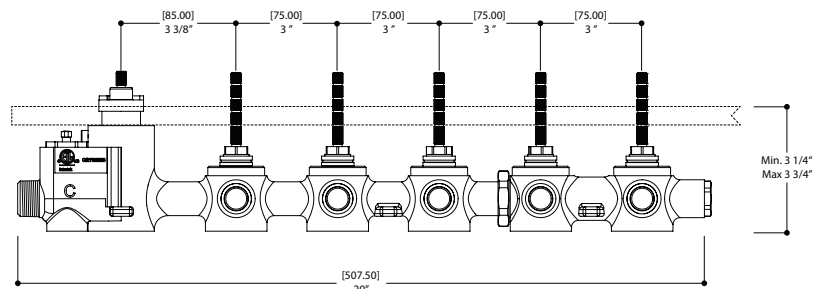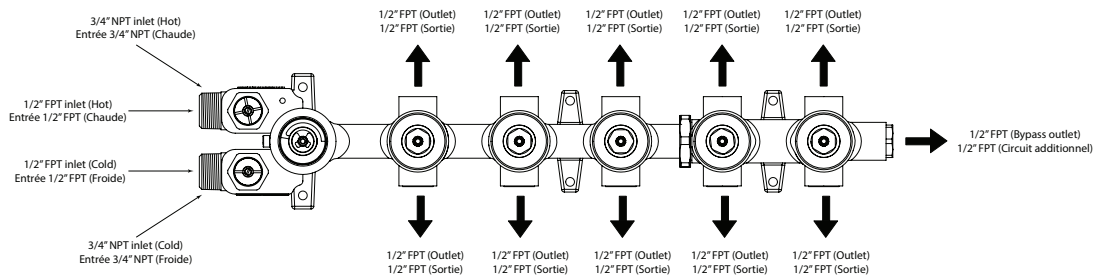

Aquabress cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.