

# artos<sup>®</sup>

## F907-77

## INSTALLATION GUIDE

handshower kit with  
3.25" square escutcheon

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK (BK)



# artos<sup>®</sup>

## F907-77

handshower kit with  
3.25" square escutcheon

## OPERATING SPECIFICATIONS



### FEATURES

Integrated Water Outlet  
60" Flexible Hose

### OPERATING PRESSURE

Minimum: 15 psi  
Maximum: 75 psi  
Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPATURE

Maximum: 176°

### FLOW CAPACITY

1.8 USGPM

### INLET/OUTLET

1/2" Female NPT

### REQUIREMENTS


This unit requires a control

# artos<sup>®</sup>

## F907-77

## PRODUCT DIMENSIONS


handshower kit with  
3.25" square escutcheon

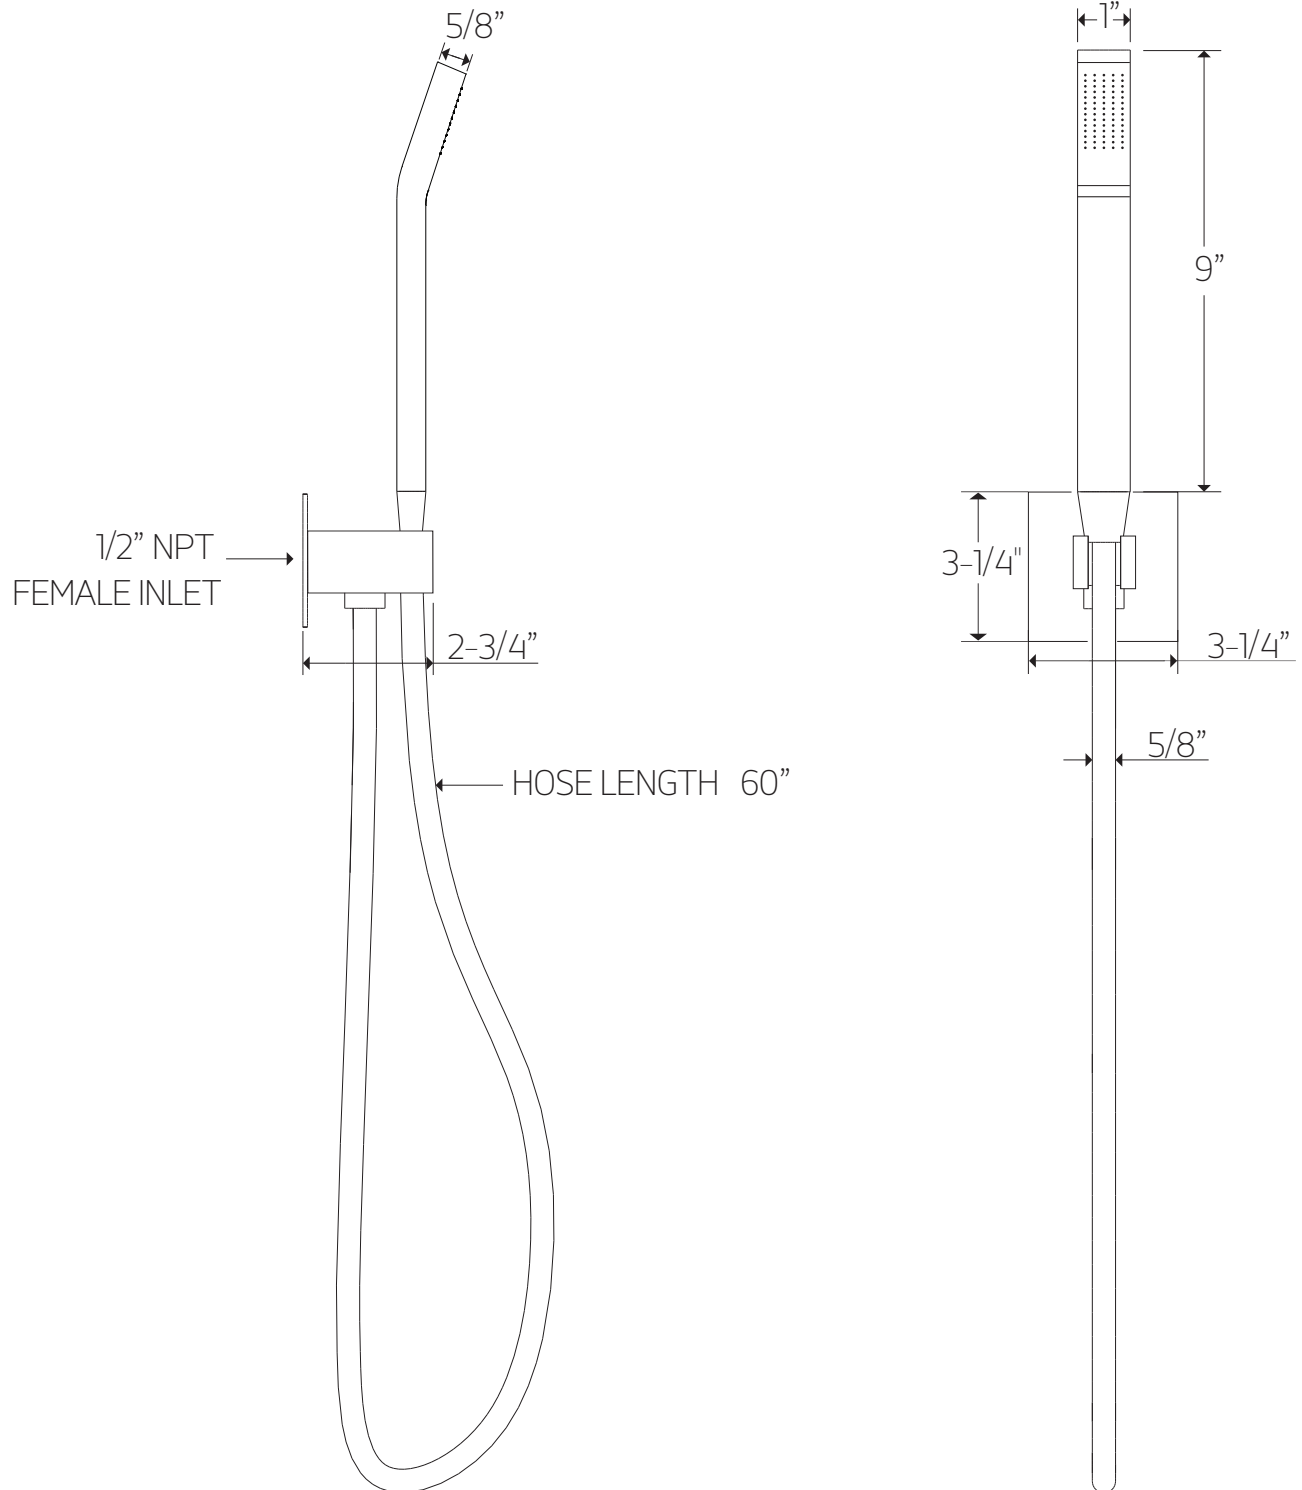


## F907-77

handshower kit with  
3.25" square escutcheon

### STEP 1

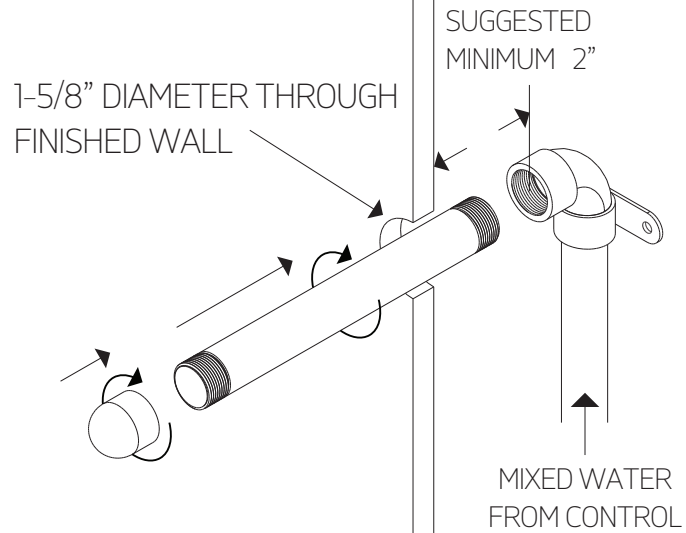


### STEP 2

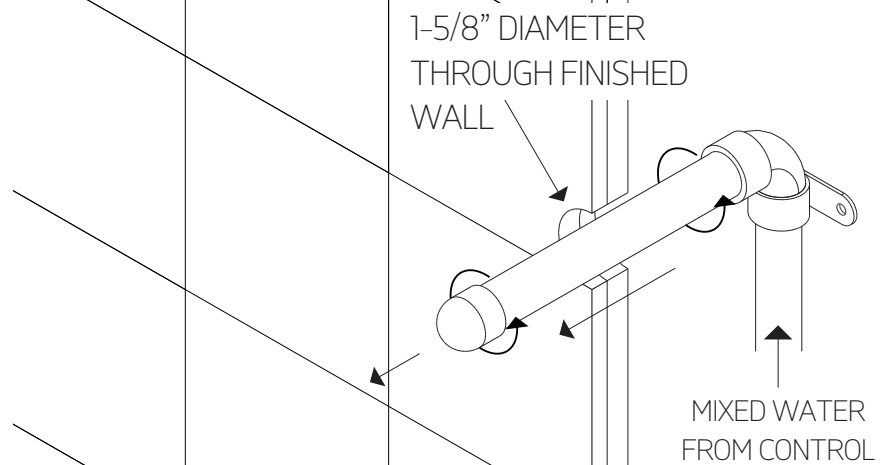


# INSTALLATION STEPS

## STEP 3

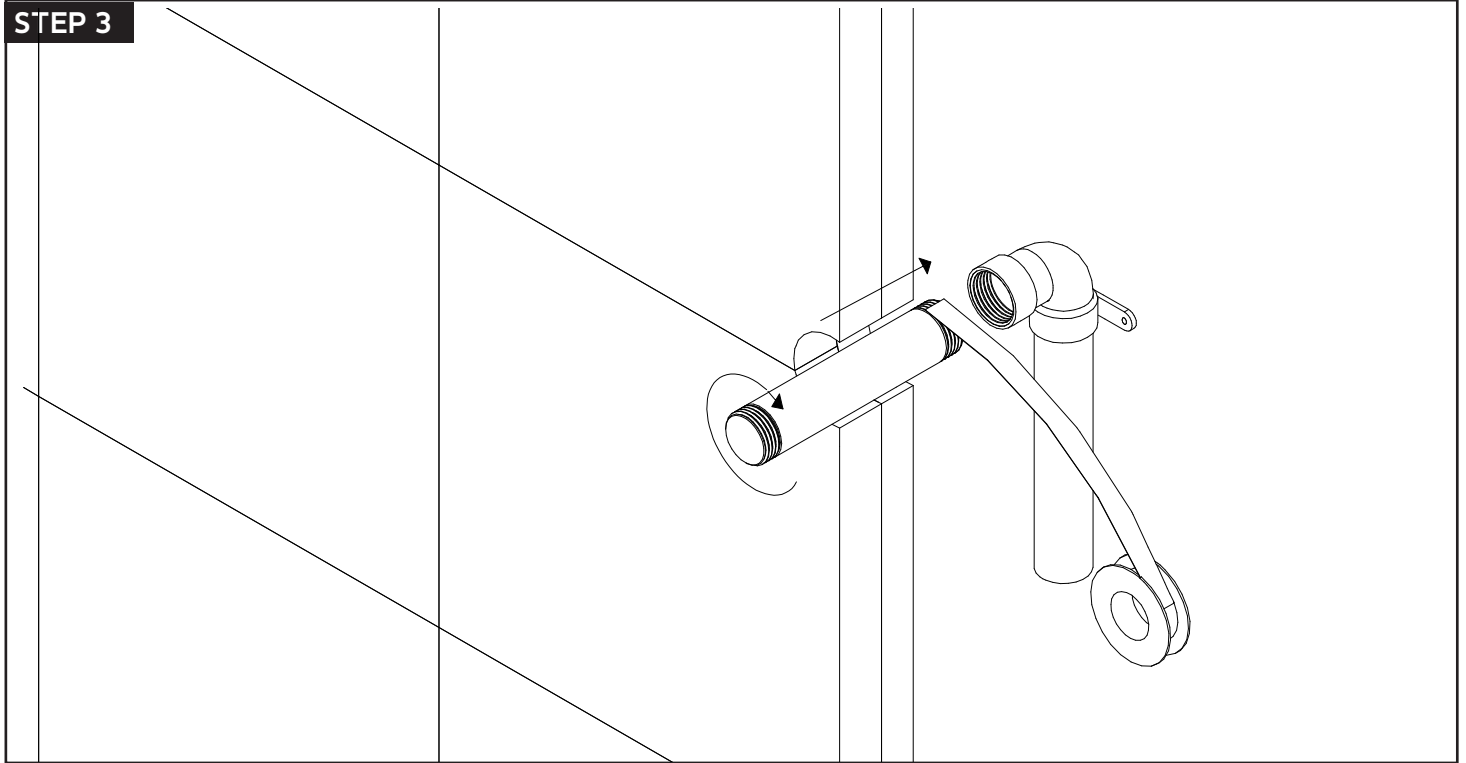


## STEP 4

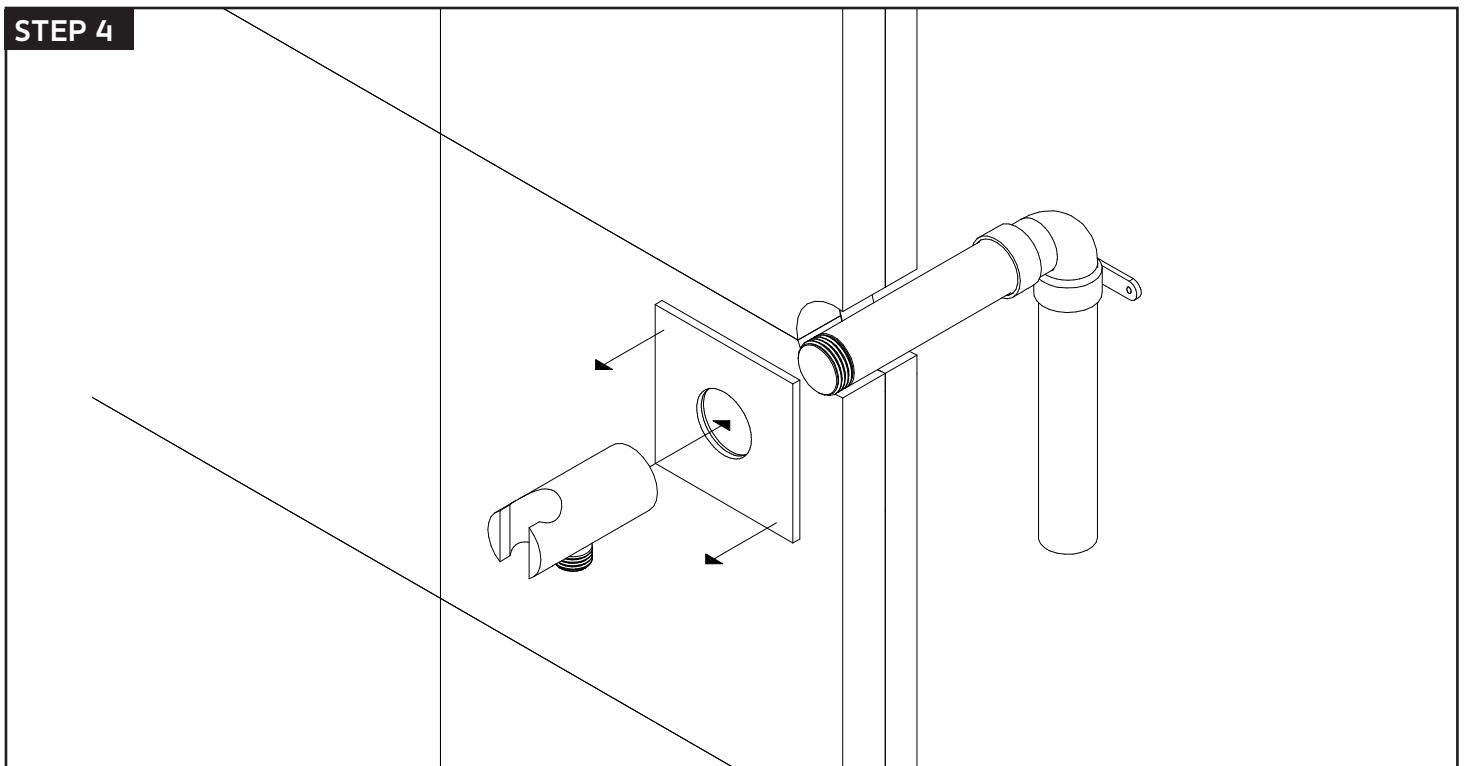

# artos<sup>®</sup>


## F907-77

handshower kit with  
3.25" square escutcheon

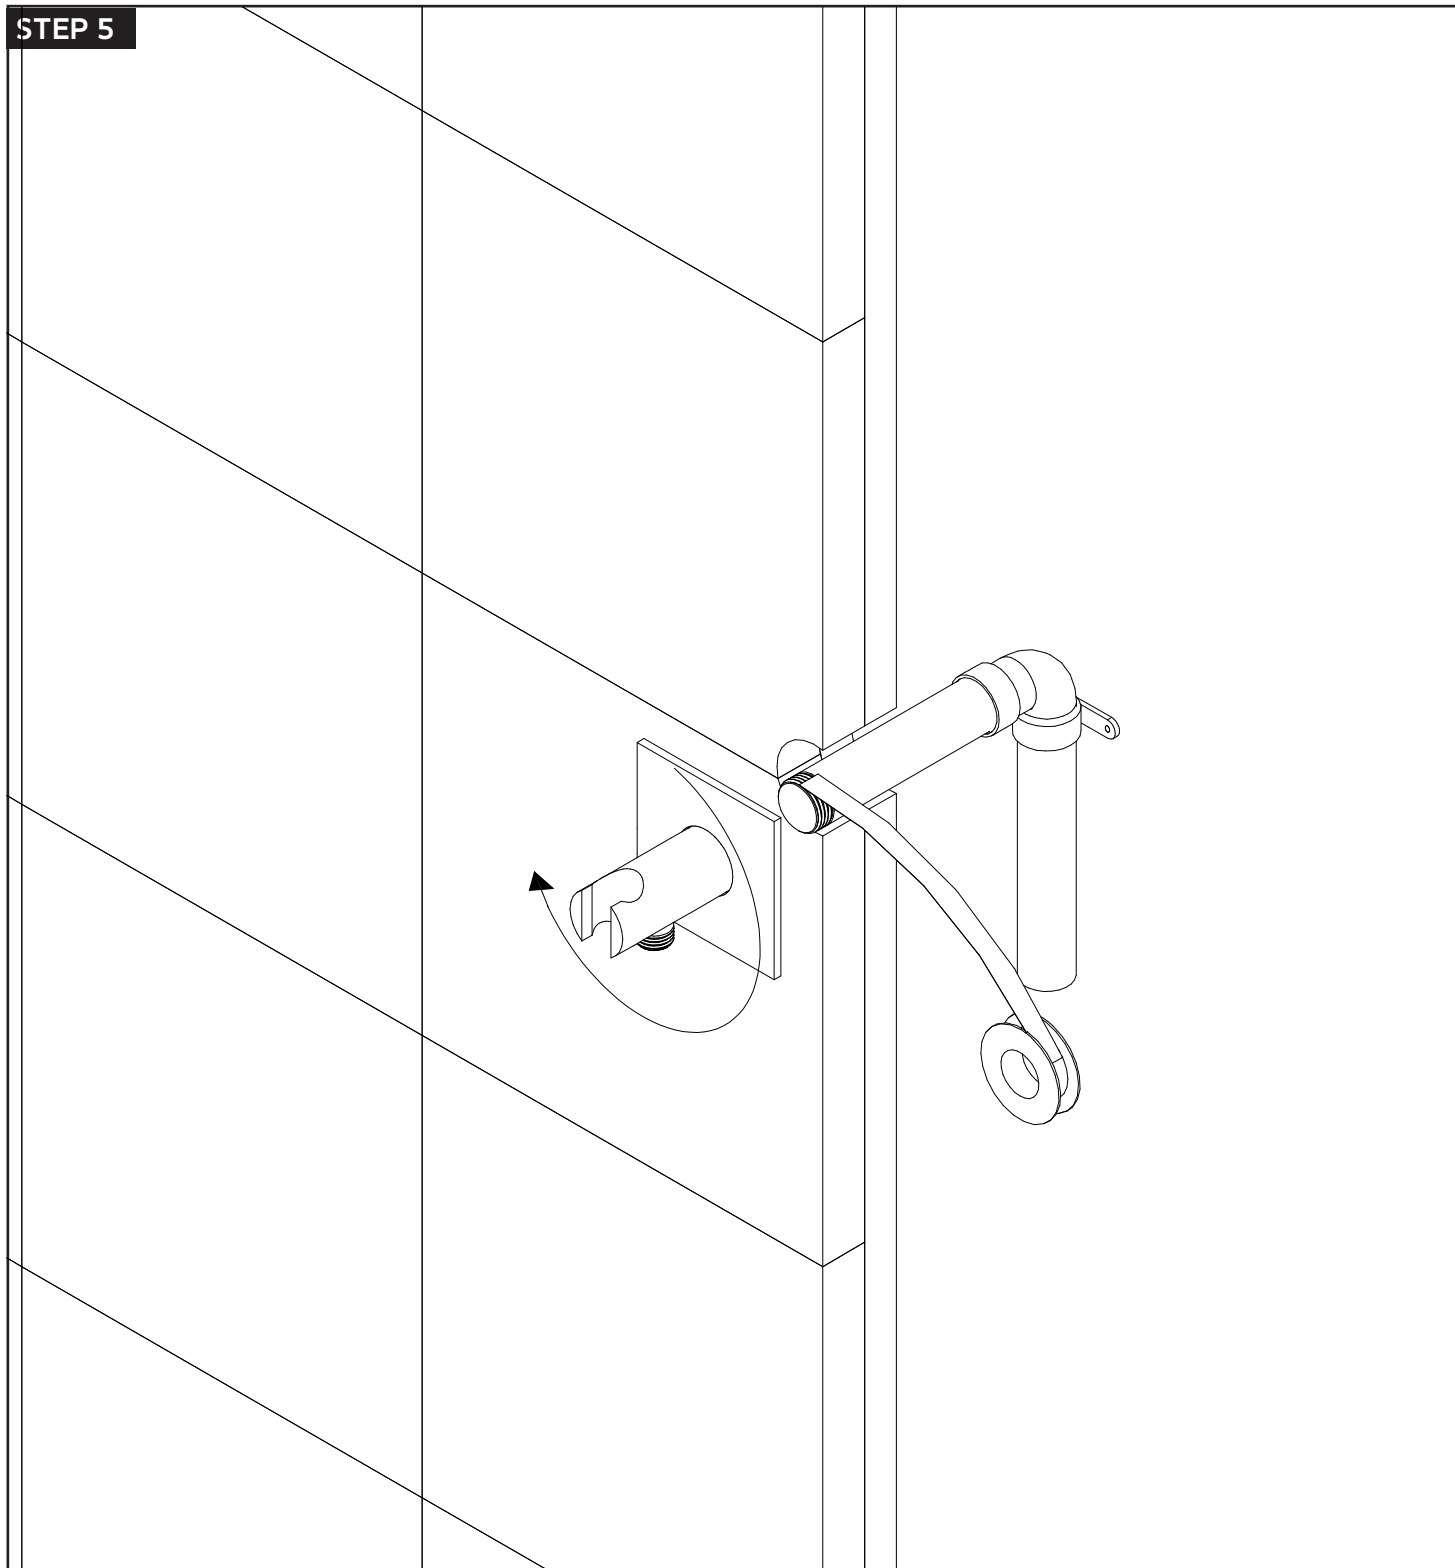

# INSTALLATION STEPS

## STEP 5

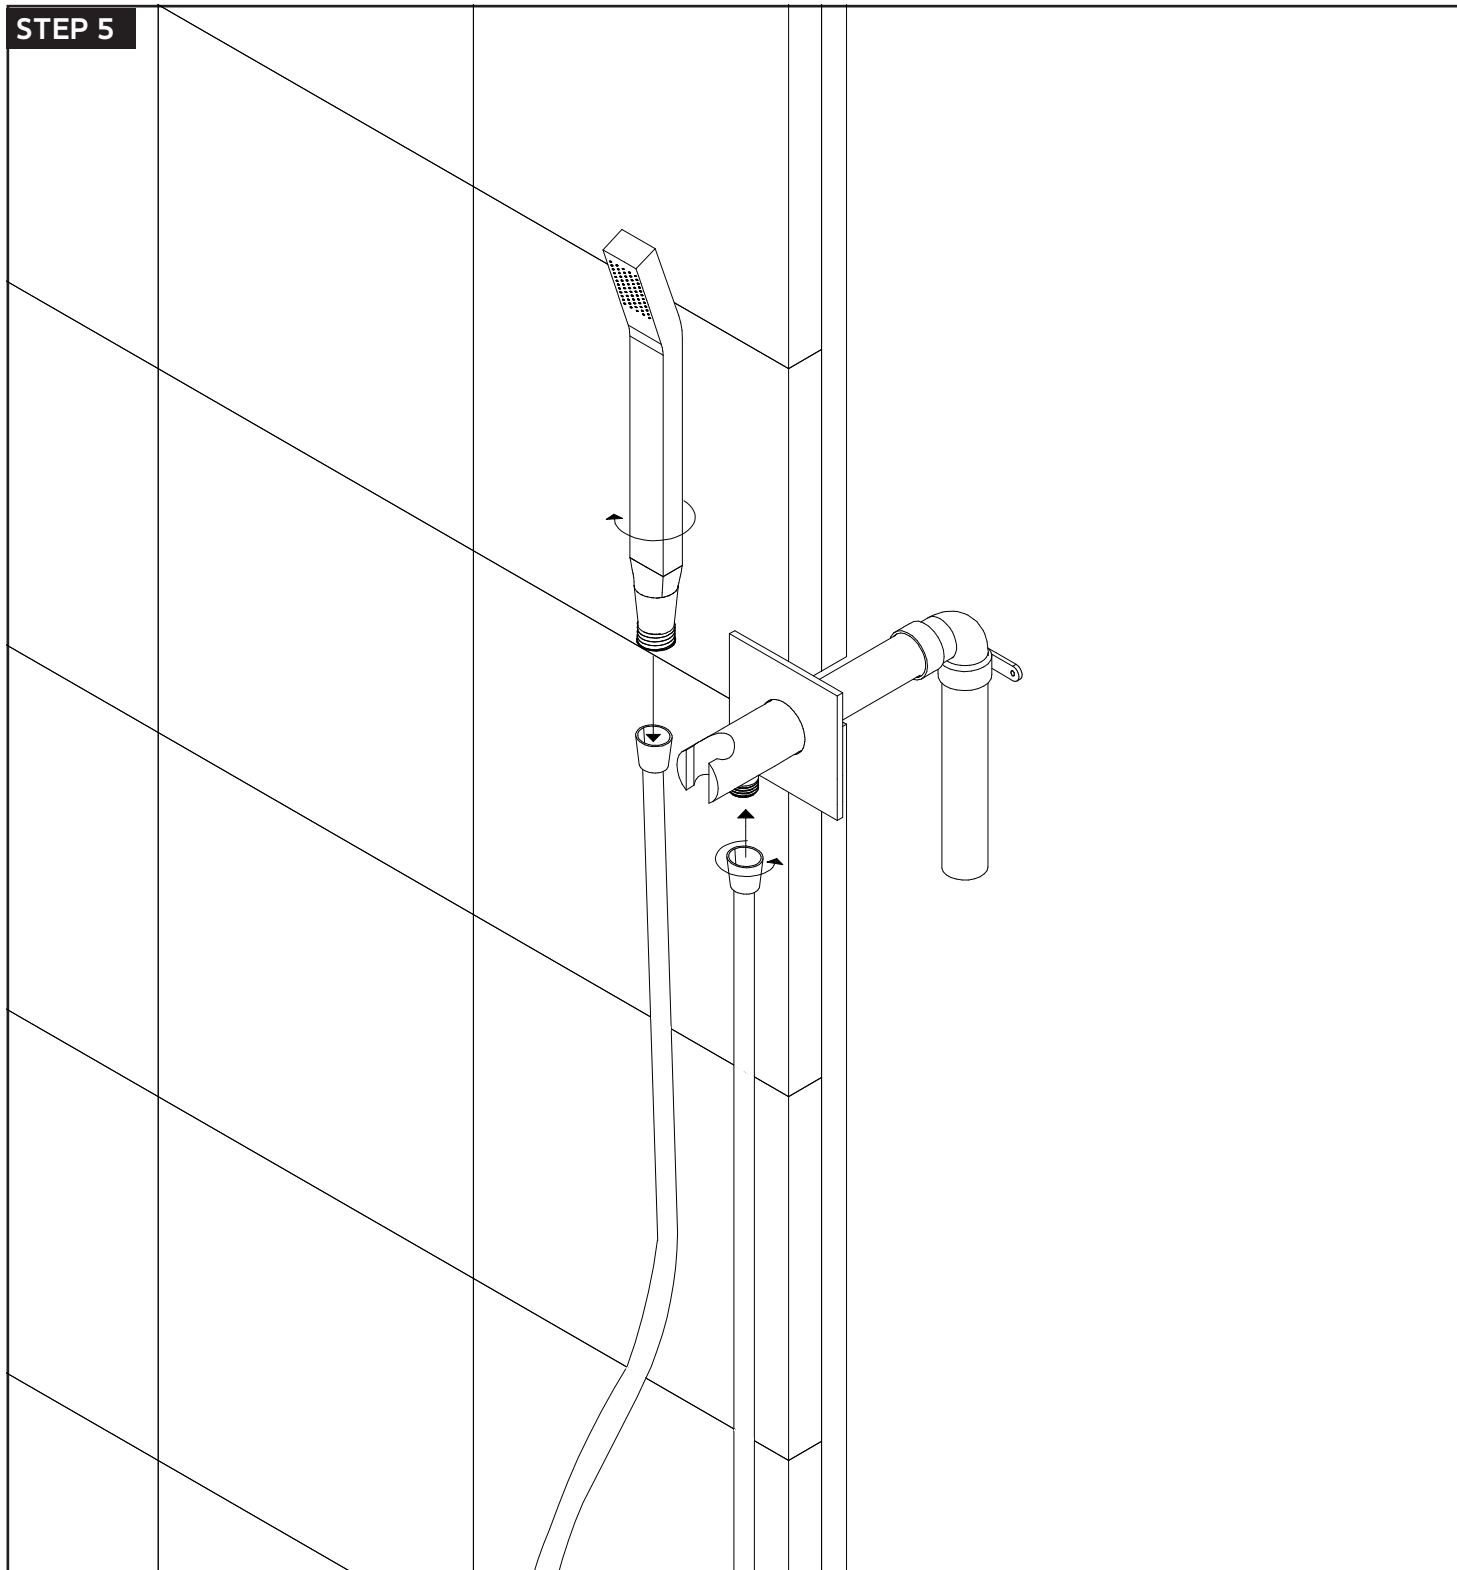

handshower kit with  
3.25" square escutcheon

