

artos[®]

F702-1

INSTALLATION GUIDE

safire floor mount tub filler
with hand shower

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)



artos[®]

F702-1

OPERATING SPECIFICATIONS

safire floor mount tub filler
with hand shower



FEATURES

Integrated Hand Shower
Integrated Controls

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

6.25 USGPM

APPROVALS





artos[®]


F702-1

PRODUCT DIMENSIONS

safire floor mount tub filler
with hand shower

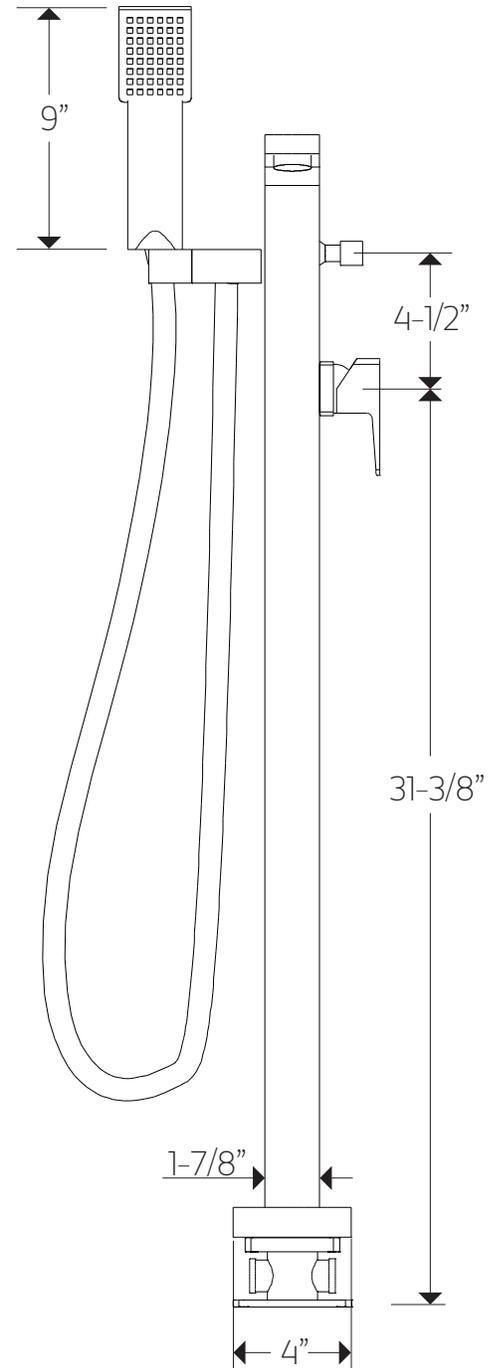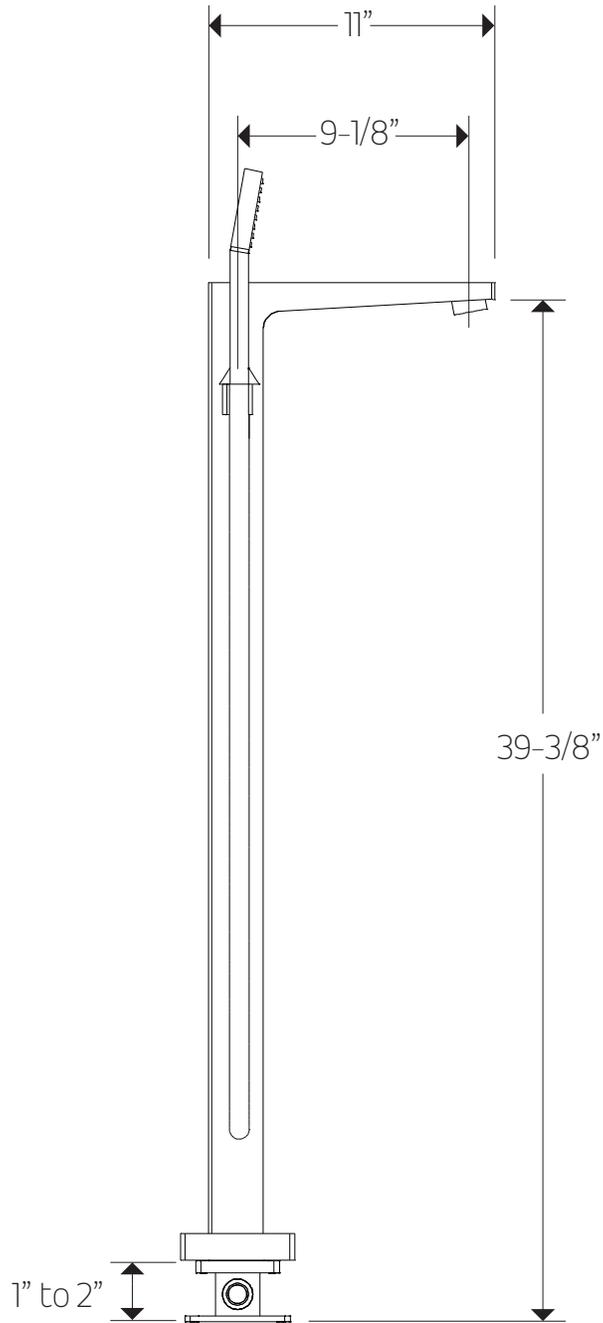


STEP 1

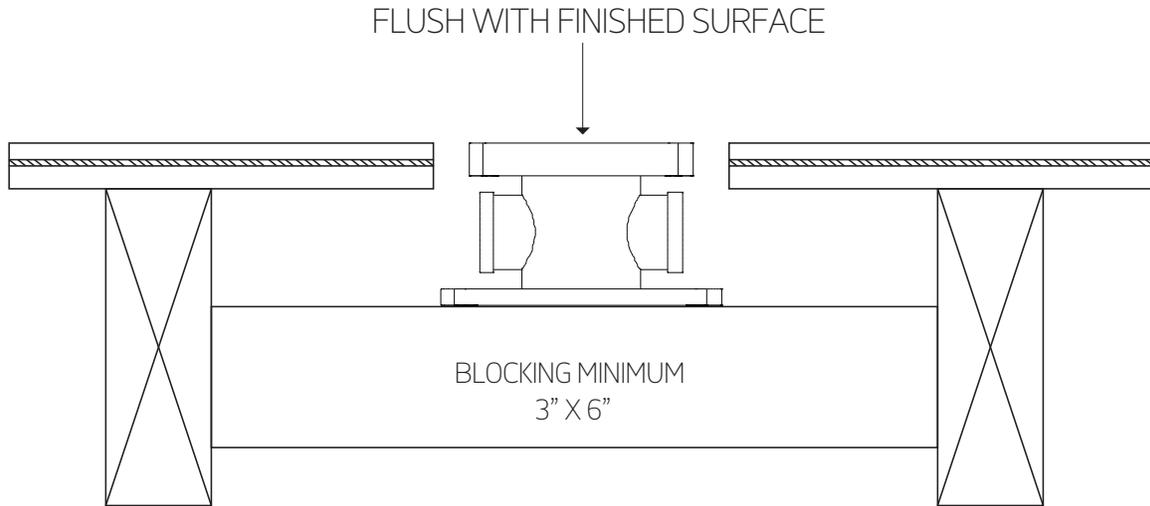


STEP 2

ONCE LEVEL, SECURE ROUGH-IN, USING 4 LAG BOLTS, INTO BLOCKING

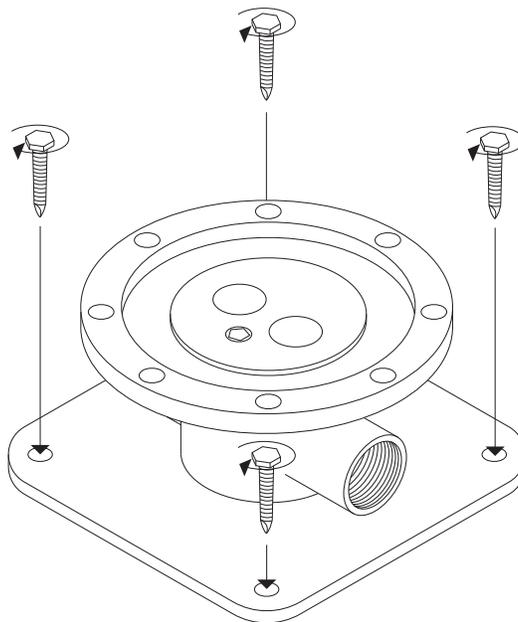


INSTALLATION STEPS


STEP 3

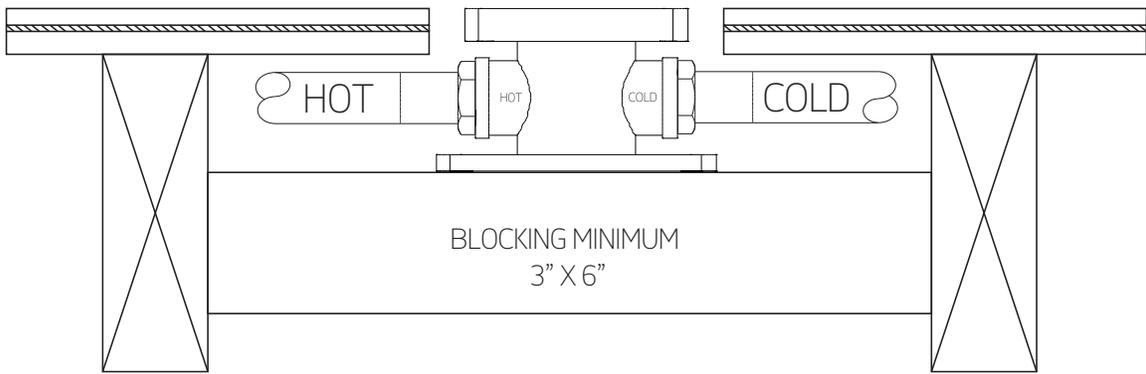


STEP 4

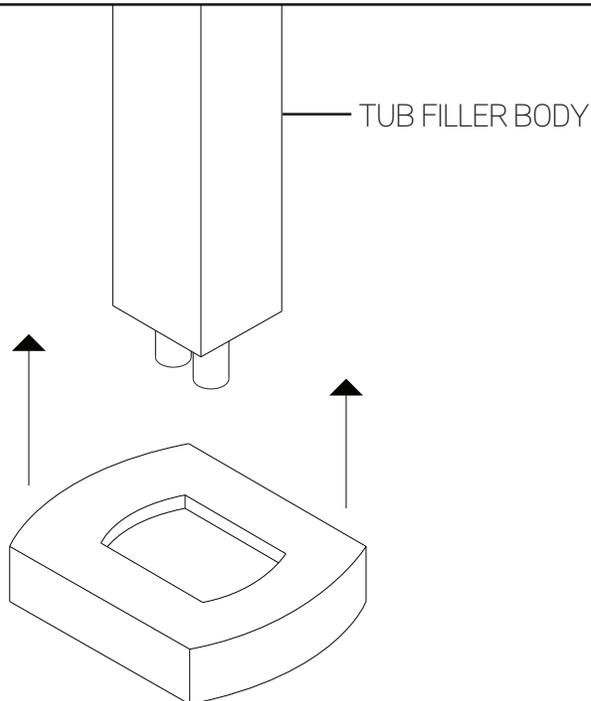

STEP 5

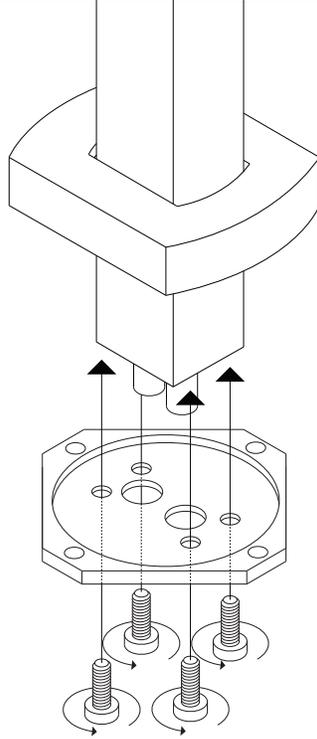


STEP 6 REMOVE PLUGS

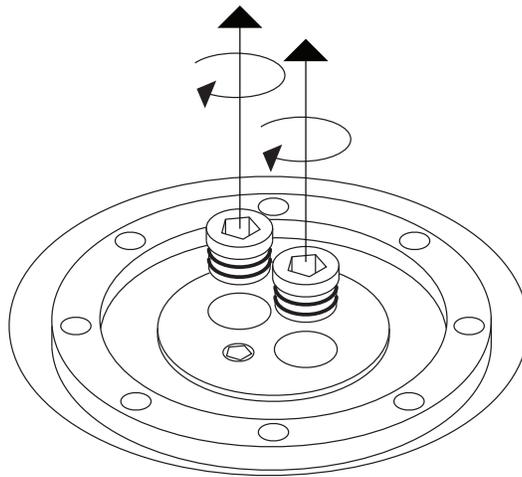


INSTALLATION STEPS

STEP 7 FLUSH TO CLEAR DEBRIS

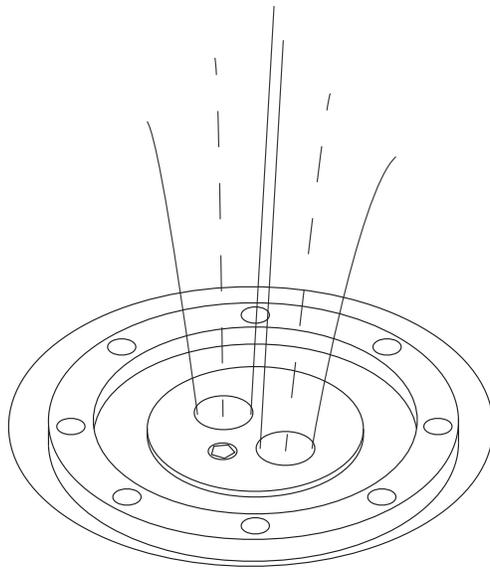

STEP 8

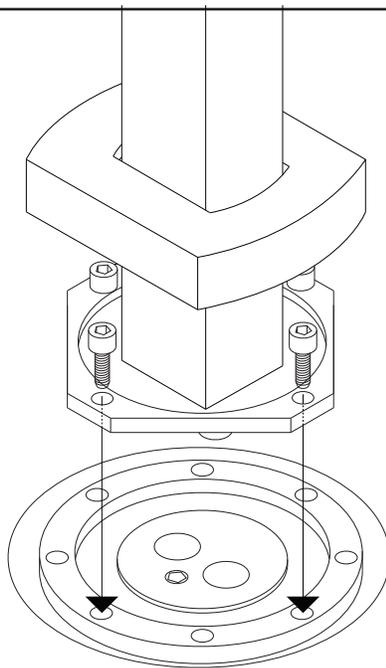


artos[®]

F702-1


INSTALLATION STEPS

safire floor mount tub filler
with hand shower


STEP 9

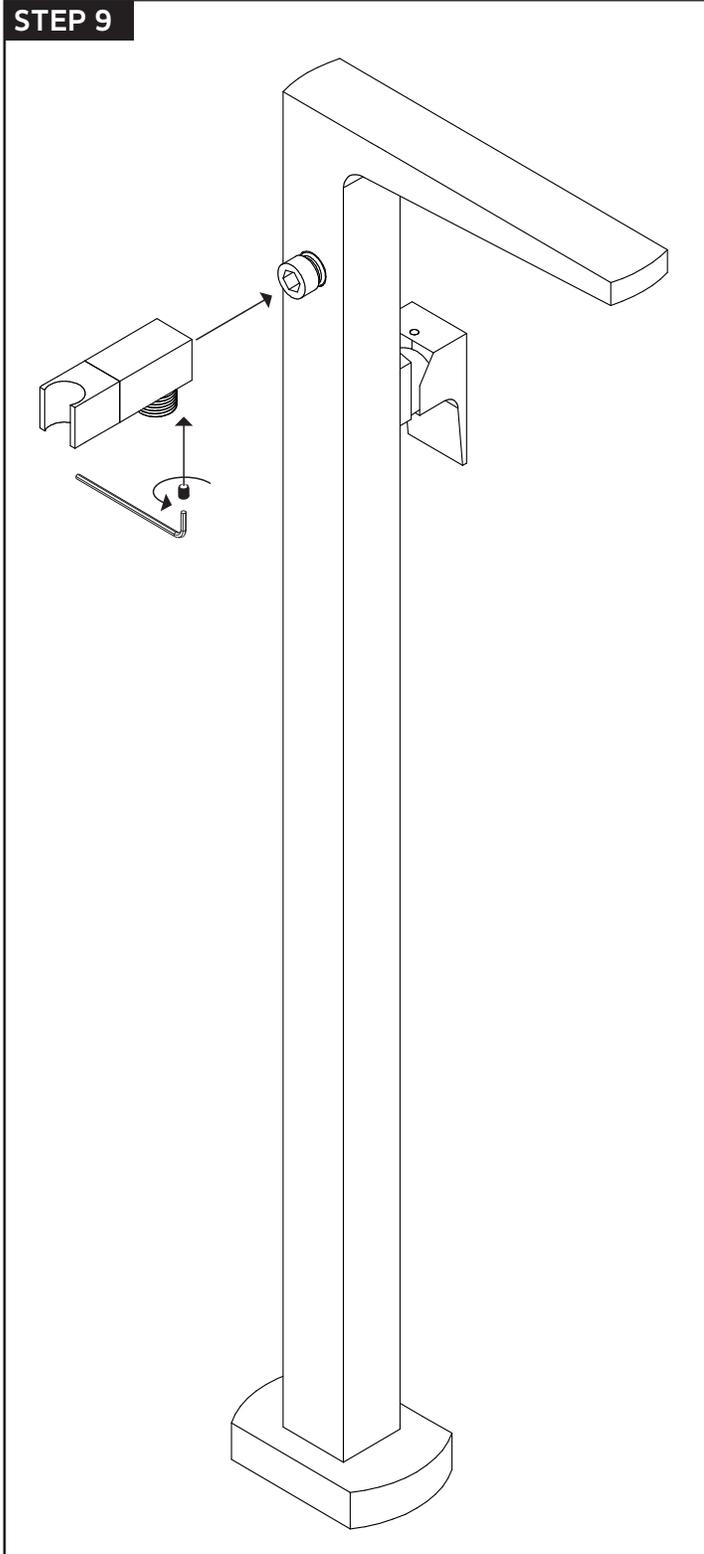

STEP 10

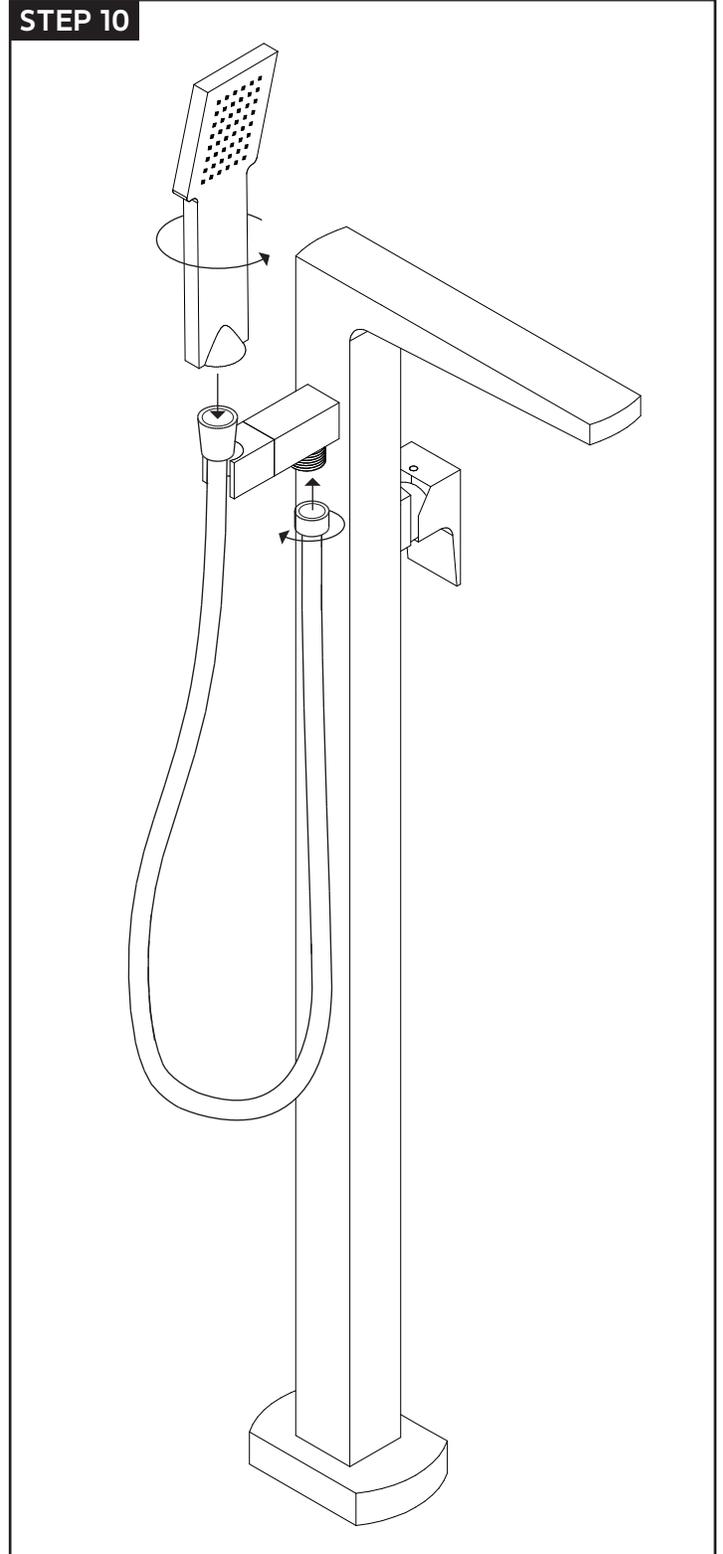

safire floor mount tub filler
with hand shower

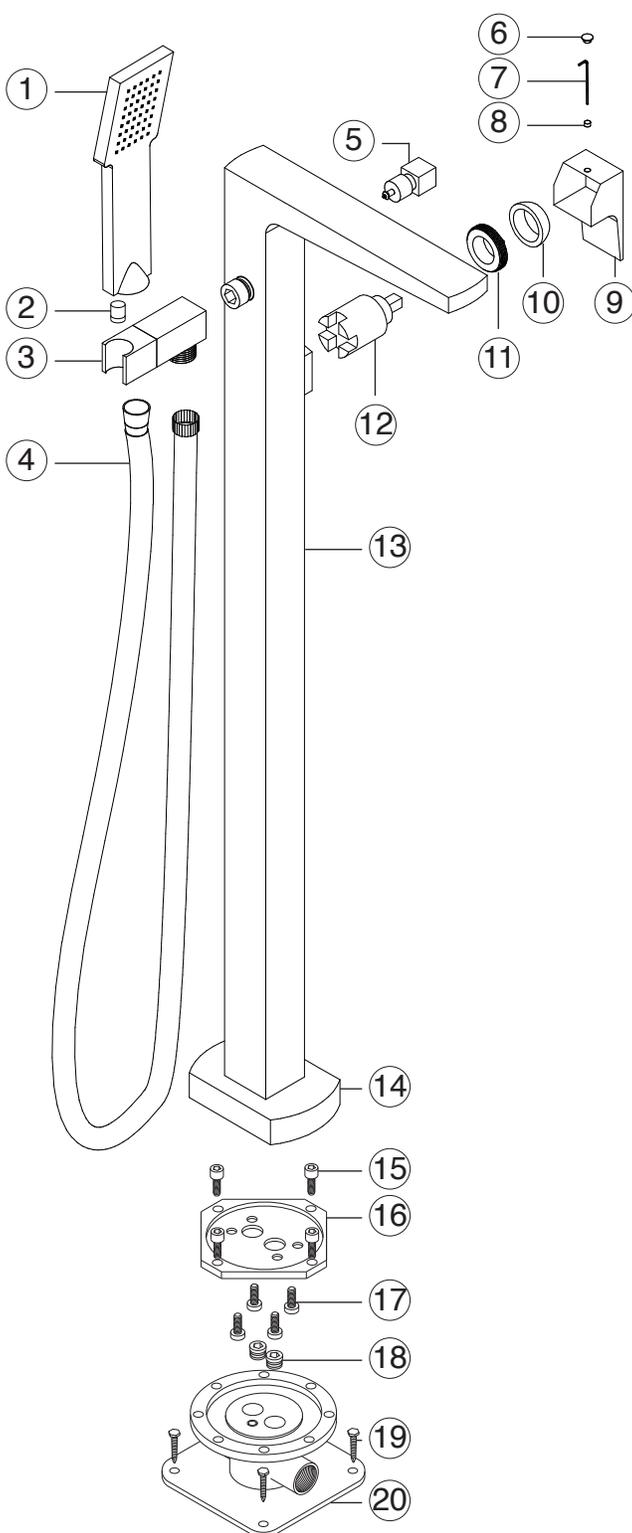

- ① **HAND SHOWER** F702-1 XP1
- ② **BACK FLOW PREVENTER** F702-1 XP2
- ③ **SHOWER OUTLET ELBOW AND HOLDER** F702-1 XP3
- ④ **TEKFLEX SHOWER HOSE** F702-1 XP4
- ⑤ **DIVERTER HANDLE** F702-1 XP5
- ⑥ **CONTROL HANDLE CAP** F702-1 XP6
- ⑦ **ALLEN WRENCH** F702-1 XP7
- ⑧ **CONTROL HANDLE SET SCREW** F702-1 XP8
- ⑨ **CONTROL HANDLE** F702-1 XP9
- ⑩ **CONTROL HANDLE DRESS RING** F702-1 XP10
- ⑪ **CONTROL CARTRIDGE SECURING NUT** F702-1 XP11
- ⑫ **CONTROL CARTRIDGE** F702-1 XP12
- ⑬ **TUB FILLER BODY** F702-1 XP13
- ⑭ **TUB FILLER ESCUTCHEON PLATE** F702-1 XP14
- ⑮ **FLANGE TO VALVE BOLT(4)** F702-1 XP15
- ⑯ **FLANGE** F702-1 XP16
- ⑰ **FLANGE TO BODY BOLT(4)** F702-1 XP17
- ⑱ **TUB FILLER VALVE PLUG(2)** F702-1 XP18
- ⑲ **TUB FILLER VALVE LAG SCREW(4)** F702-1 XP19
- ⑳ **TUB FILLER VALVE** F702-1 XP20

artos[®]

F702-1

CARE & MAINTENANCE

safire floor mount tub filler
with hand shower

For best results, keep the following in mind to retain the high quality finish of your artos[®] faucets:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

artos[®] faucets are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **F702-1**
SERIAL NO.