

artos[®]

F907-42

INSTALLATION GUIDE

five function flexible hose
shower kit with slide bar and
integrated water outlet squ

BRUSHED NICKEL(BN)



CHROME(CH)



artos[®]

F907-42

OPERATING SPECIFICATIONS

five function flexible hose
shower kit with slide bar and
integrated water outlet squ



FEATURES

Integrated Water Outlet
60" Flexible Hose

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

2.0 USGPM

INLET/OUTLET

1/2" Male NPT

REQUIREMENTS



This unit requires a control

artos[®]

F907-42

PRODUCT DIMENSIONS

five function flexible hose
shower kit with slide bar and
integrated water outlet squ

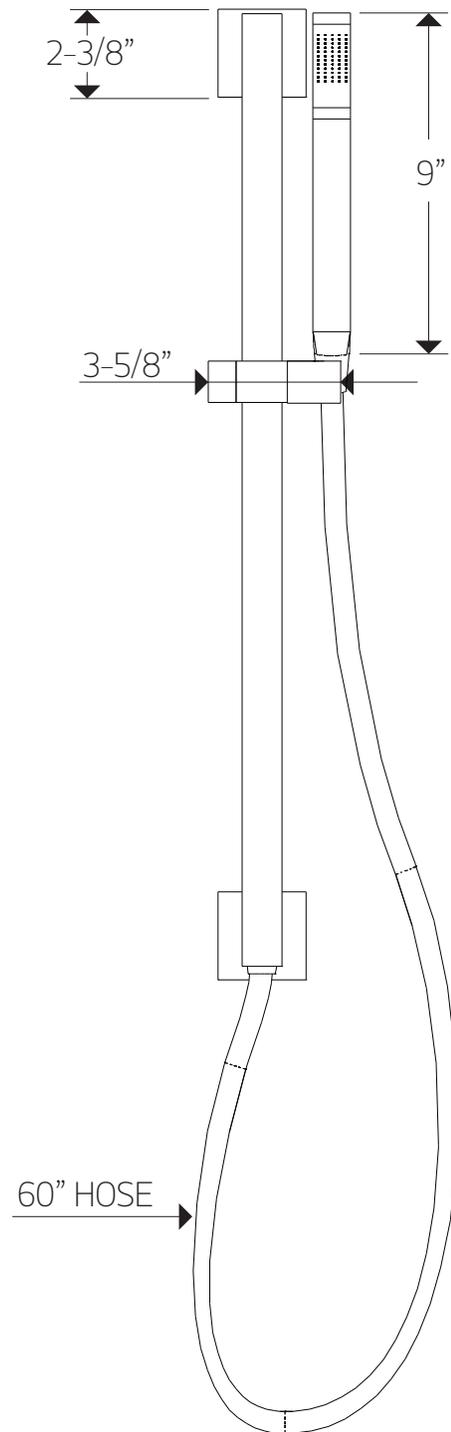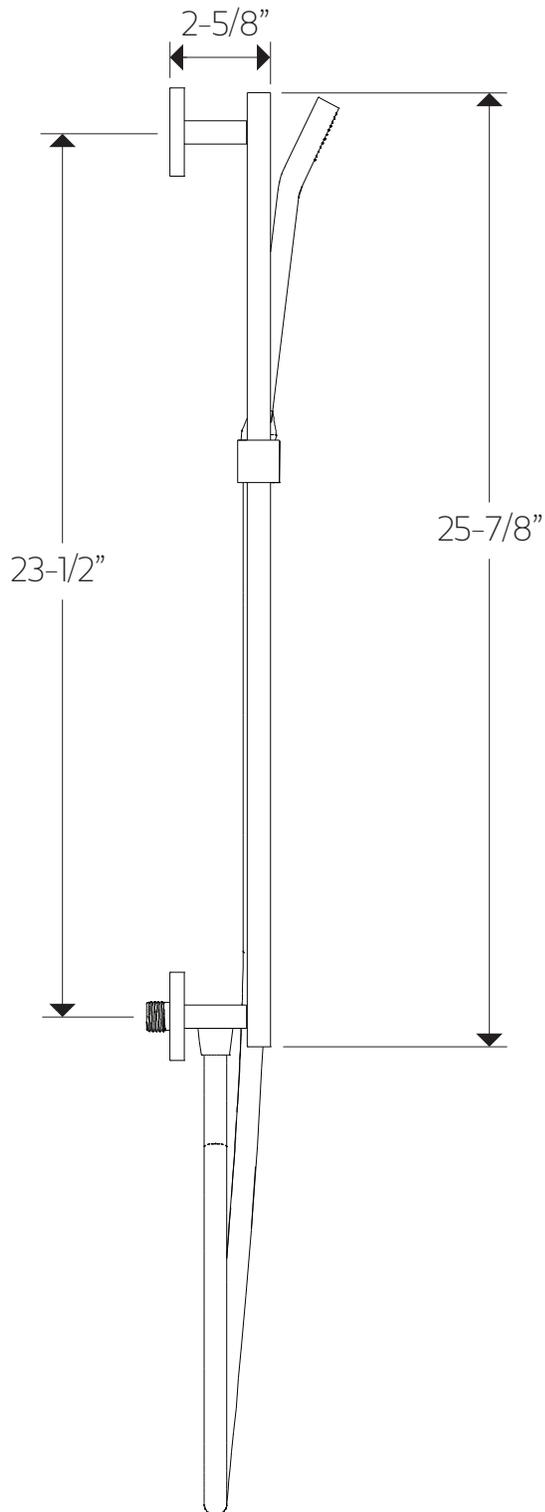


F907-42

five function flexible hose
shower kit with slide bar and
integrated water outlet squ

STEP 1 *ALL DIMENSIONS ARE APPROXIMATE


1-3/8" DIAMETER THROUGH
FINISHED WALL

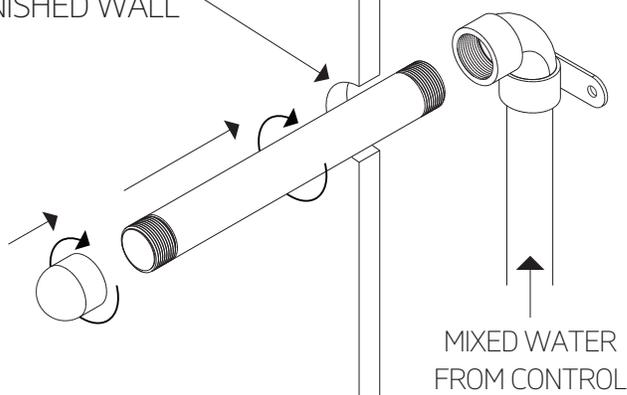

STEP 2


1-3/8" DIAMETER
THROUGH FINISHED
WALL

MIXED WATER
FROM CONTROL

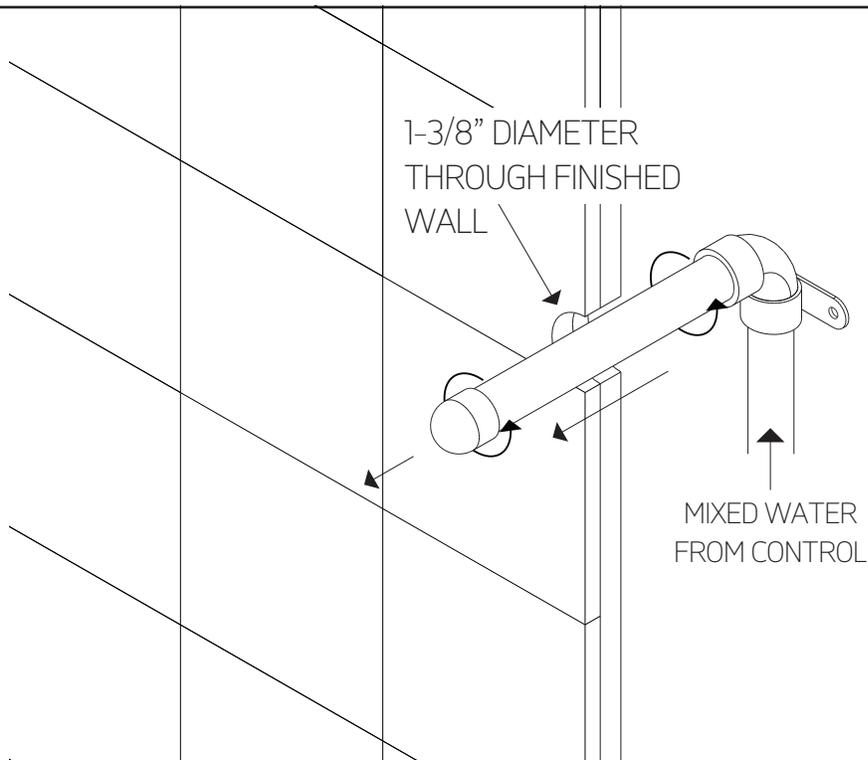


INSTALLATION STEPS

STEP 3

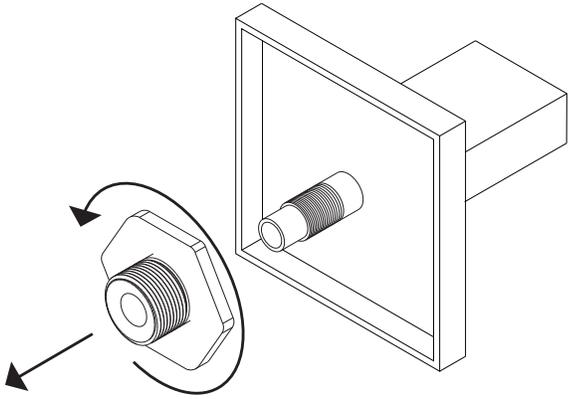

STEP 4

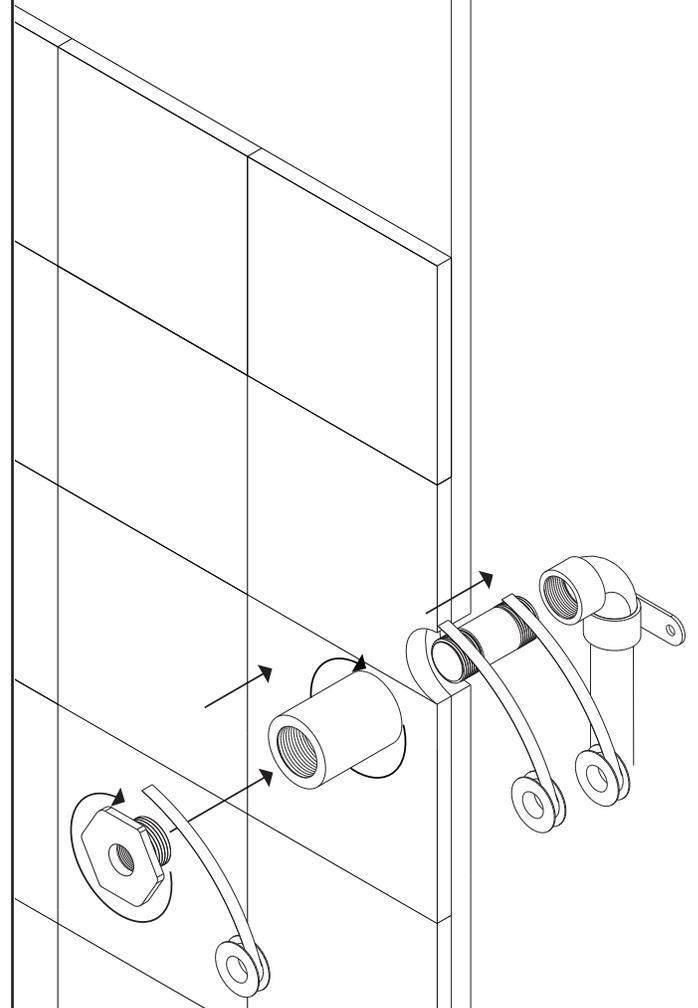


artos[®]


F907-42

five function flexible hose
shower kit with slide bar and
integrated water outlet squ



STEP 5

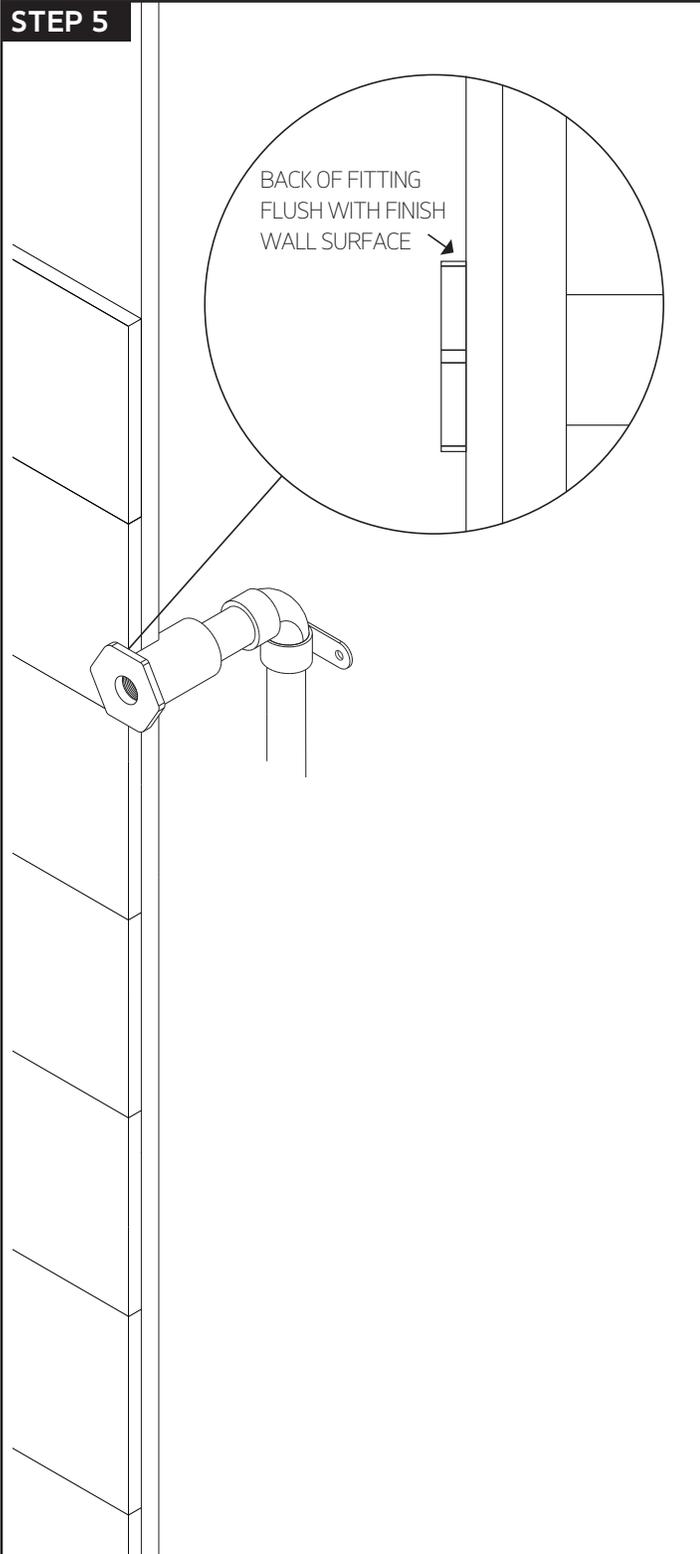

STEP 6

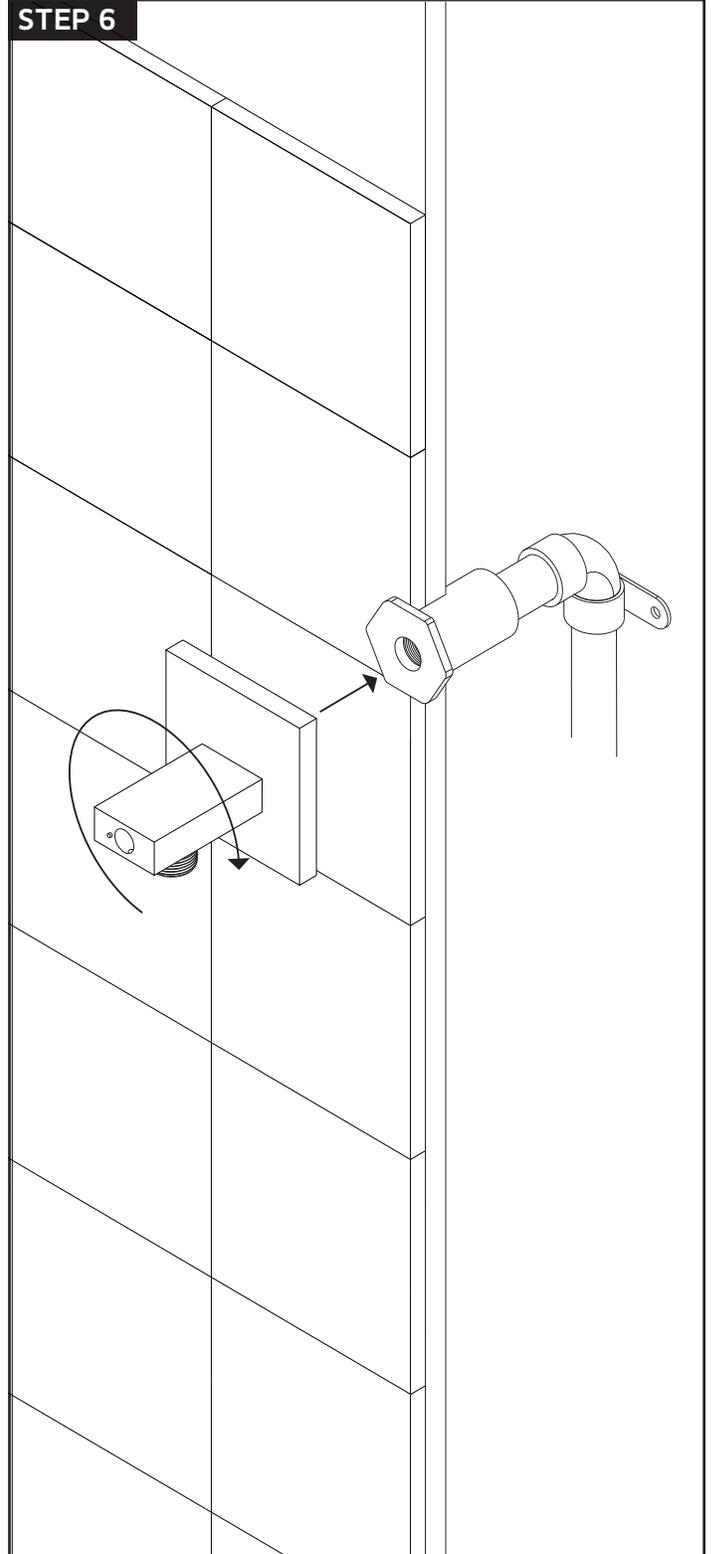



INSTALLATION STEPS

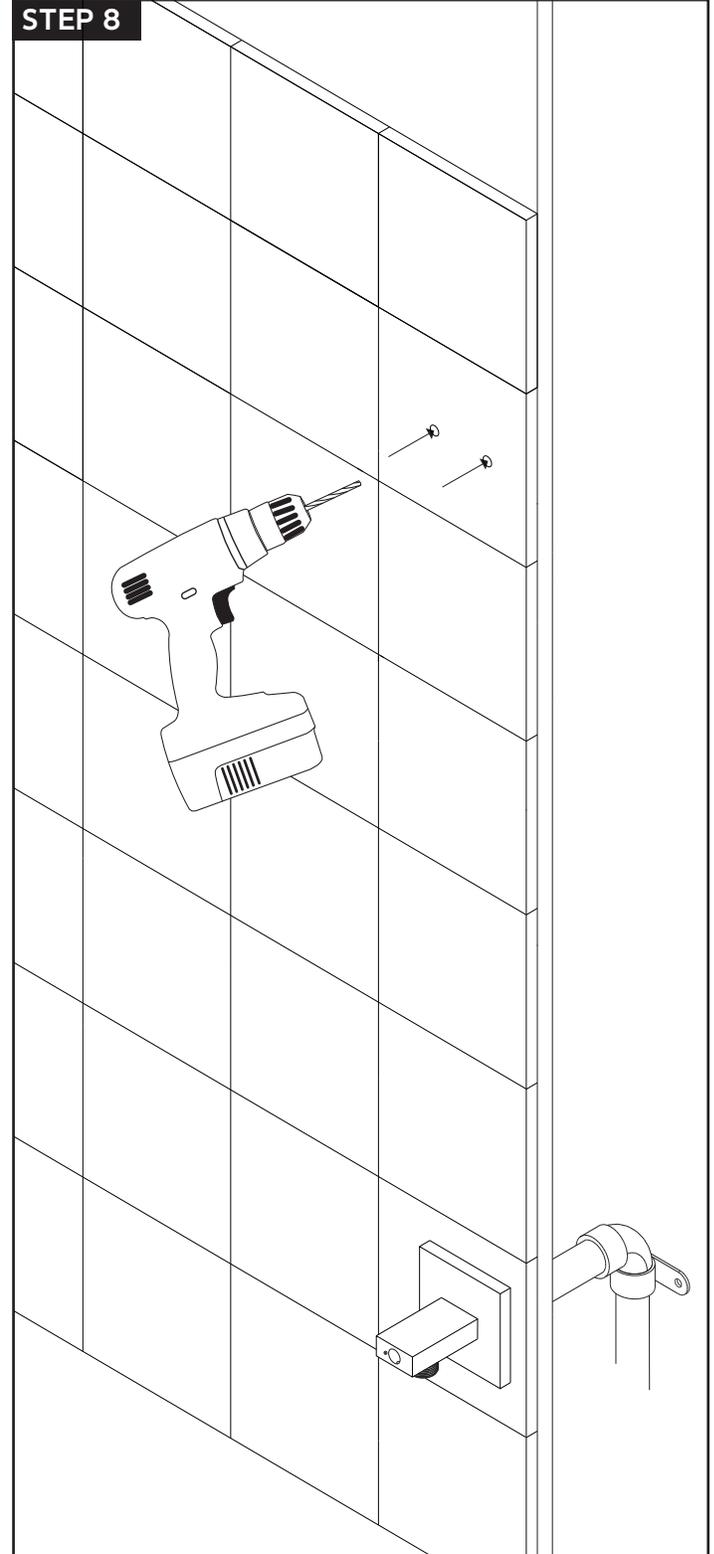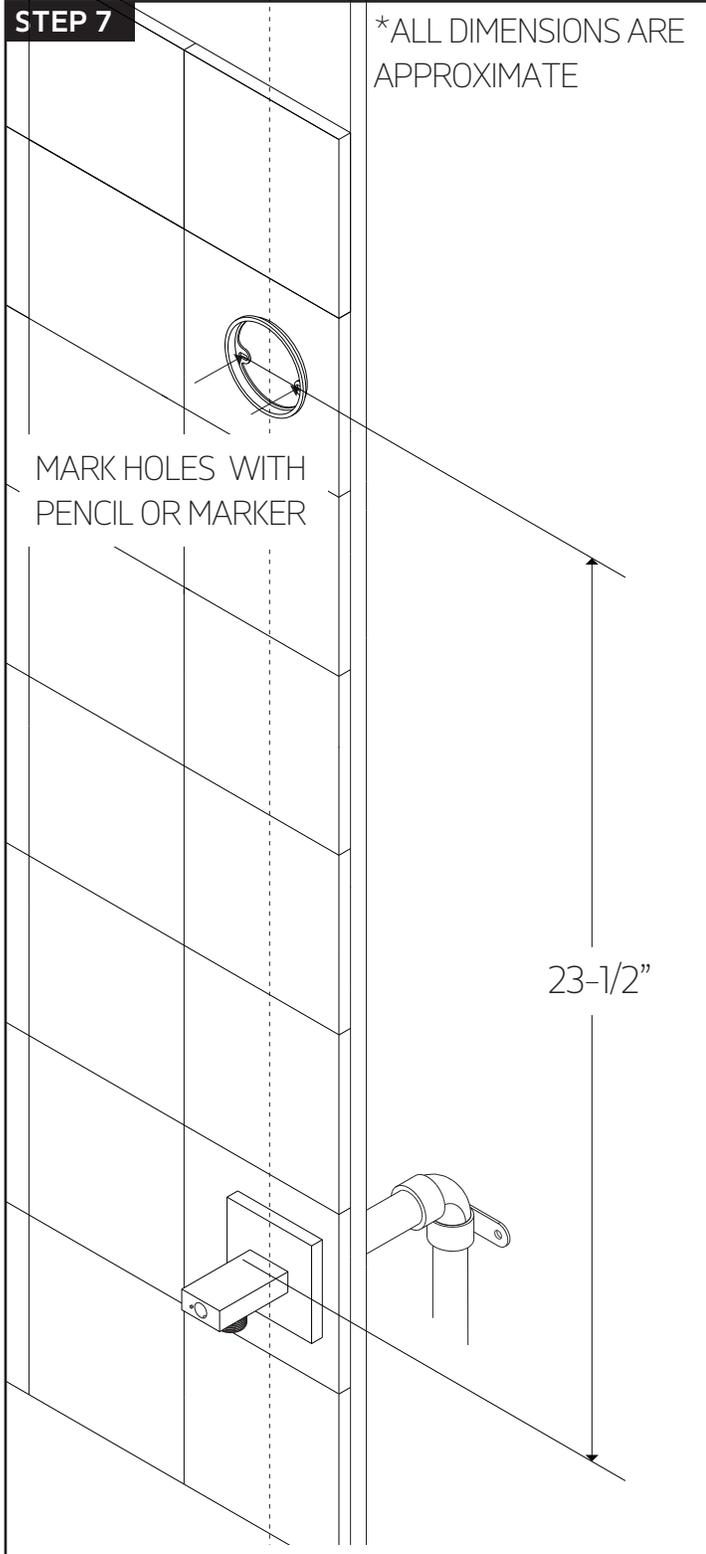



artos[®]

F907-42

five function flexible hose
shower kit with slide bar and
integrated water outlet squ

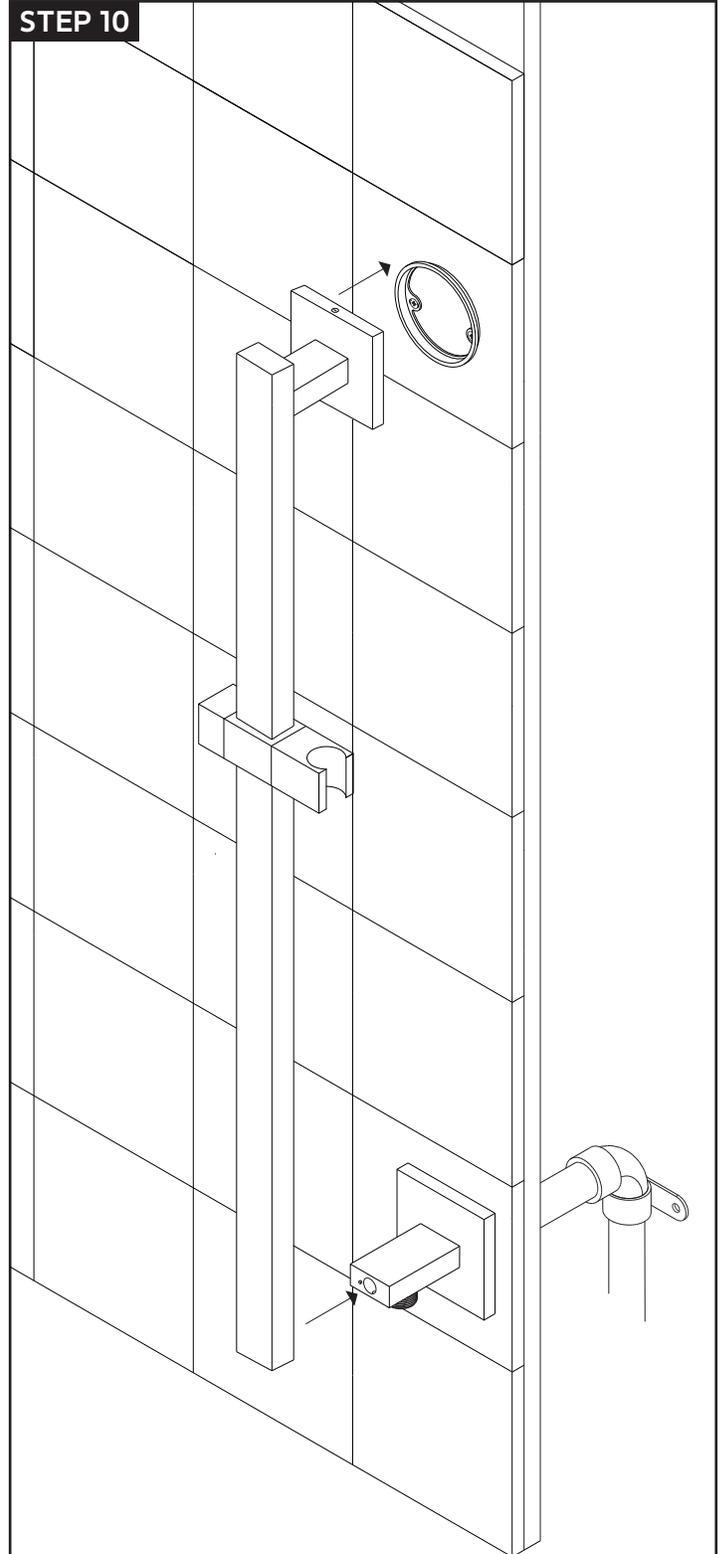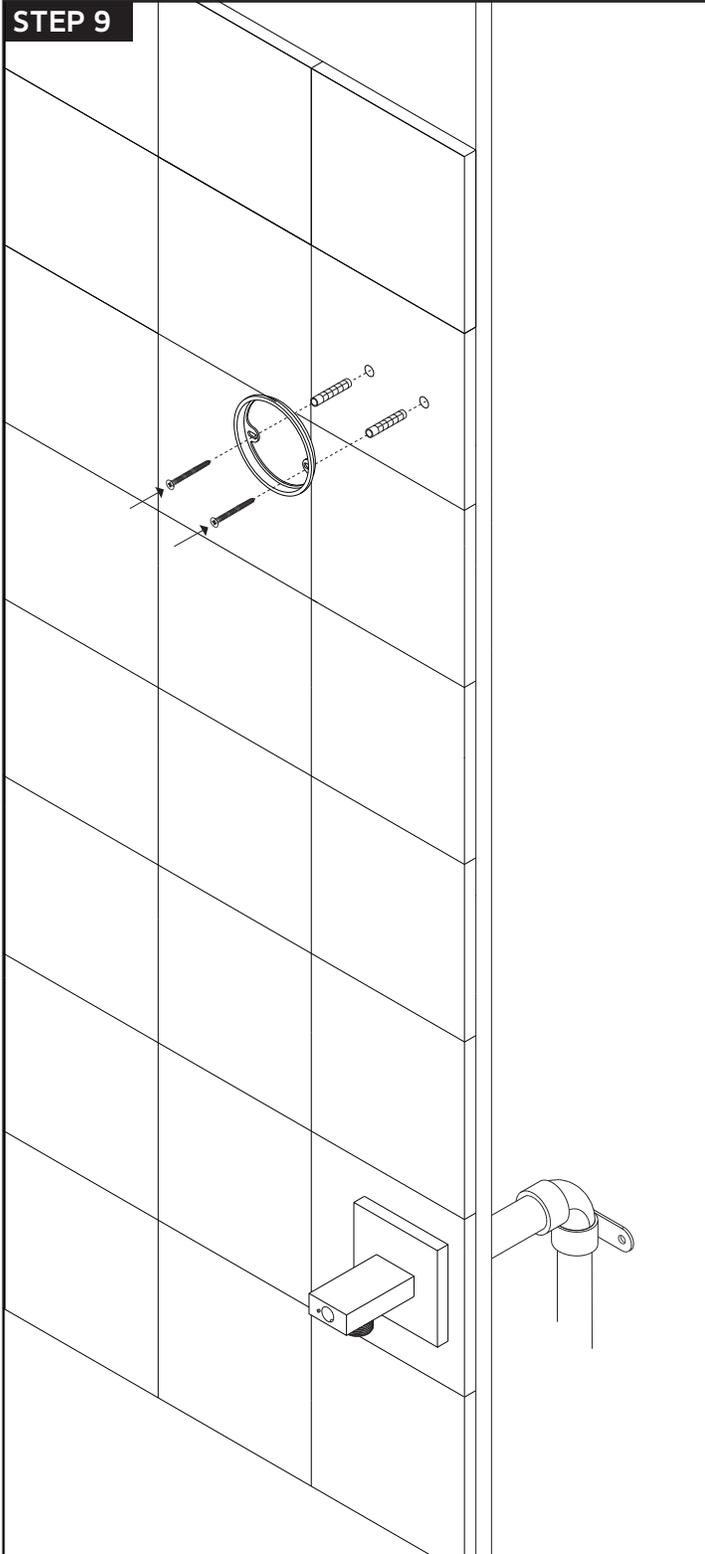

INSTALLATION STEPS

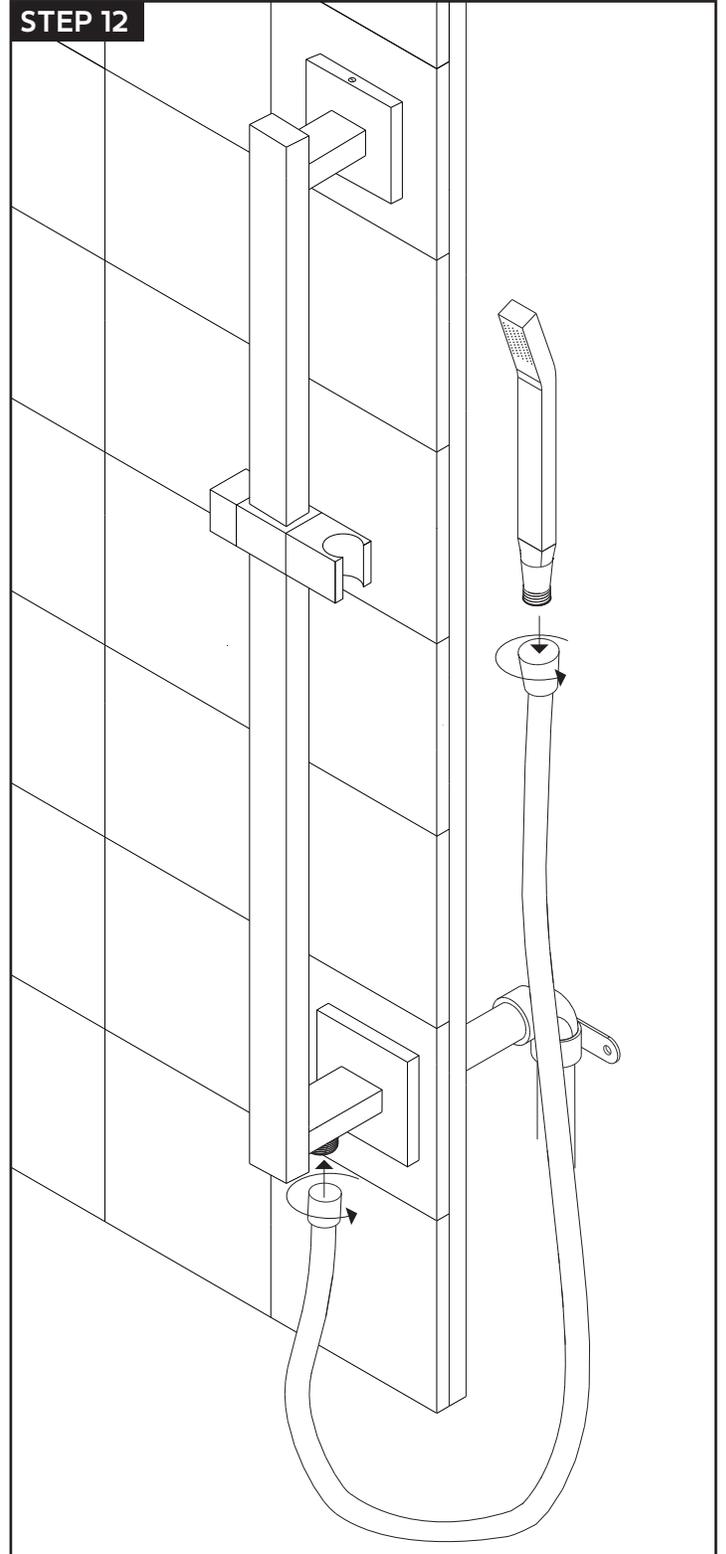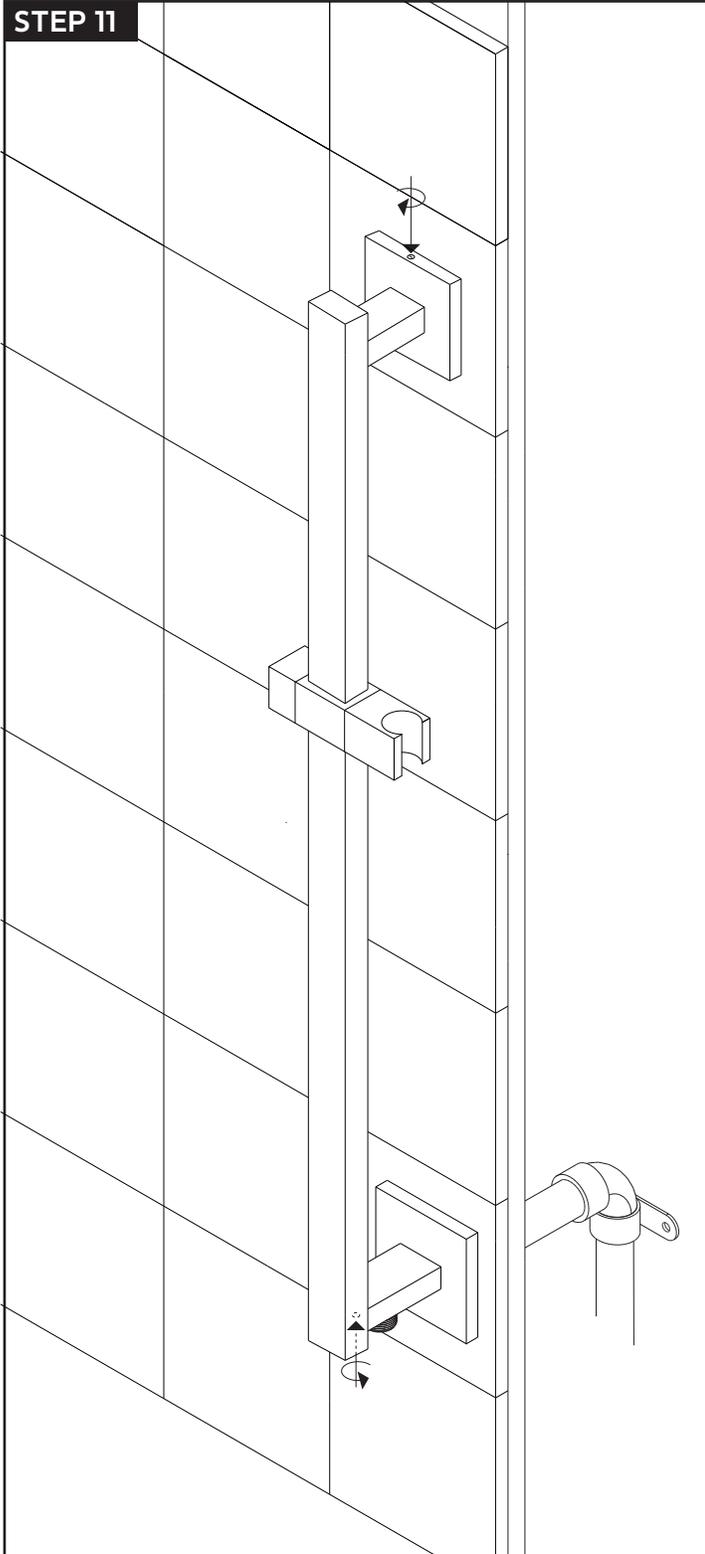


artos[®]

F907-42

PARTS BREAKDOWN

five function flexible hose
shower kit with slide bar and
integrated water outlet squ

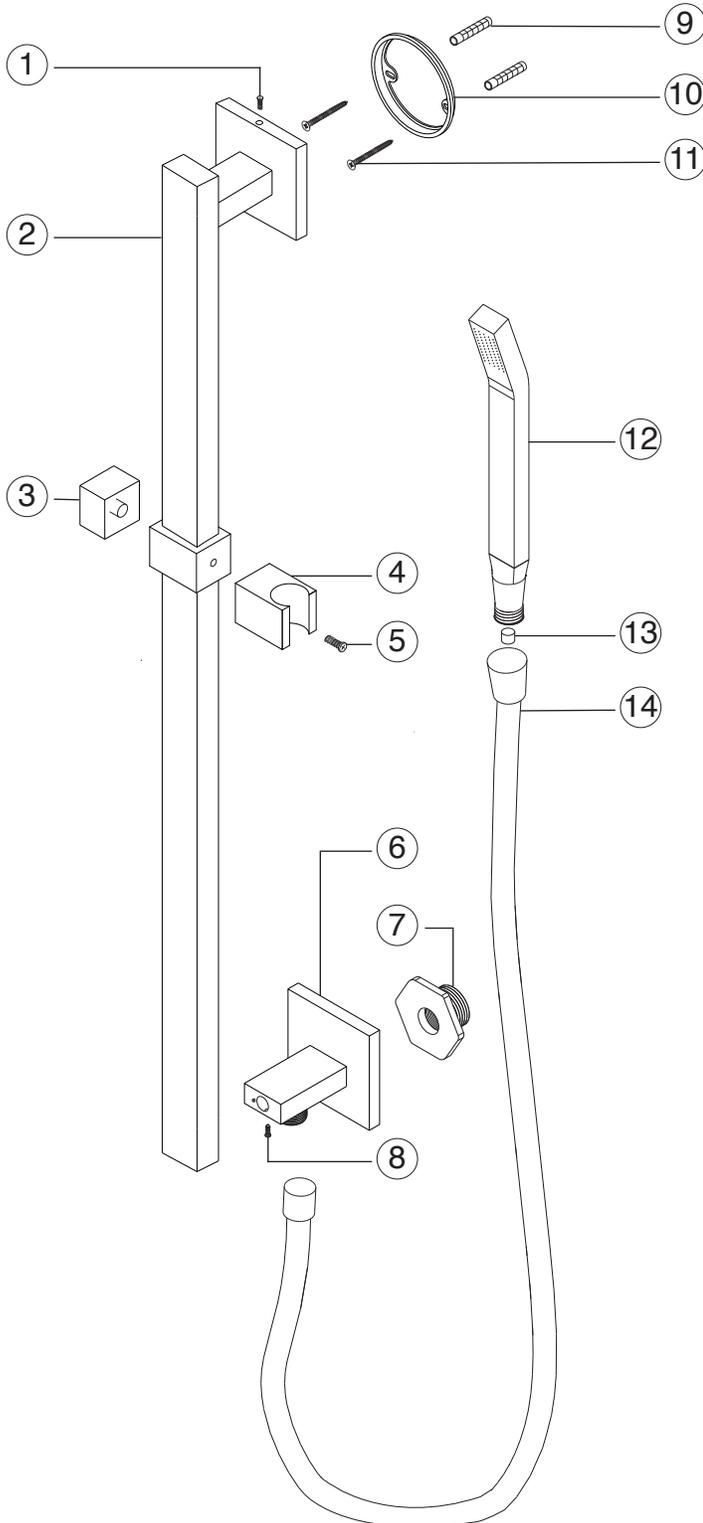

- ① WALL BRACKET SET SCREW F907-42 XP1
- ② SLIDE BAR F907-42 XP2
- ③ SLIDE BAR ADJUSTMENT HANDLE F907-42 XP3
- ④ HAND SHOWER HOLDER F907-42 XP4
- ⑤ HAND SHOWER HOLDER SCREW F907-42 XP5
- ⑥ SLIDE BAR INLET/OUTLET F907-42 XP6
- ⑦ INLET ADAPTER F907-42 XP7
- ⑧ SLIDE BAR INLET/OUTLET SET SCREW F907-42 XP8
- ⑨ WALL ANCHORS F907-42 XP9
- ⑩ WALL BRACKET F907-42 XP10
- ⑪ WALL BRACKET SCREWS F907-42 XP11
- ⑫ HAND SHOWER F907-42 XP12
- ⑬ HAND SHOWER CHECK VALVE F907-42 XP13
- ⑭ HAND SHOWER HOSE F907-42 XP14

artos[®]

F907-42

five function flexible hose
shower kit with slide bar and
integrated water outlet squ

CARE & MAINTENANCE

For best results, keep the following in mind to retain the high quality finish of your artos[®] shower kit:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

artos[®] shower kits are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **F907-42**
SERIAL NO.