

F907-47

INSTALLATION GUIDE

flexible hose shower kit with slide bar and separate water outlet square

BRUSHED NICKEL(BN)















F907-47|

OPERATING SPECIFICATIONS

flexible hose shower kit with slide bar and separate water outlet square



FEATURES

Separate Water Outlet 60" Flexible Hose

OPERATING PRESSURE

Minimum: 15 psi Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

2.0 USGPM

INLET/OUTLET

1/2" Male NPT

REQUIREMENTS


This unit requires a control


artos



F907-47


TECHNICAL DATA SHEET

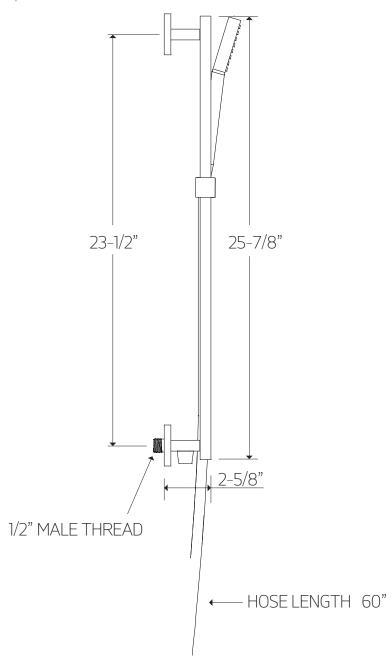


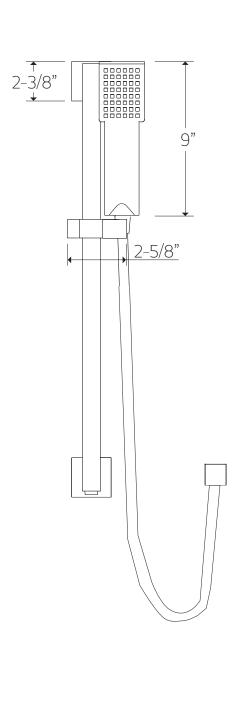


artos®


F907-47

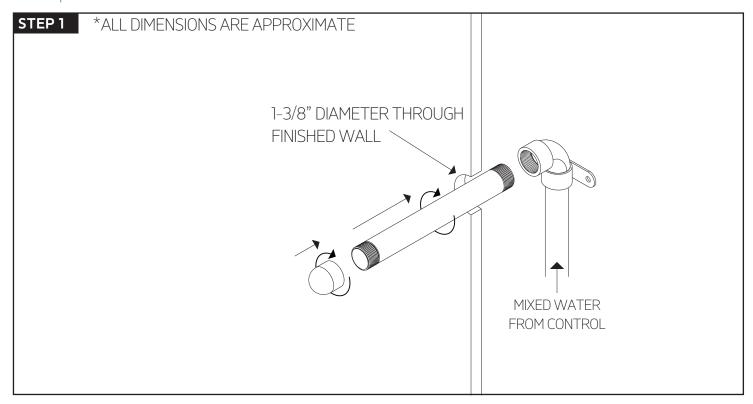

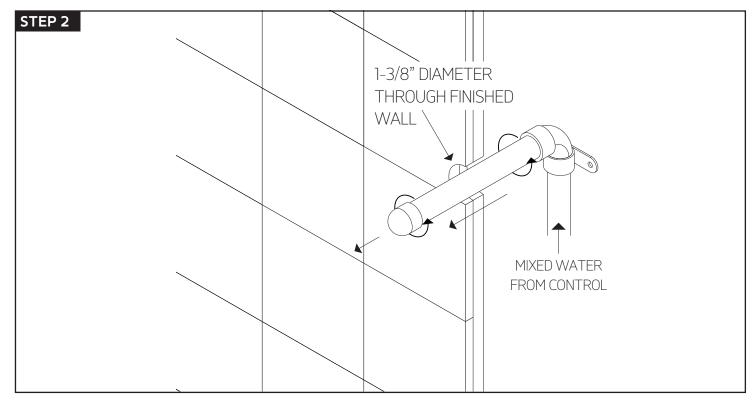


INSTALLATION STEPS

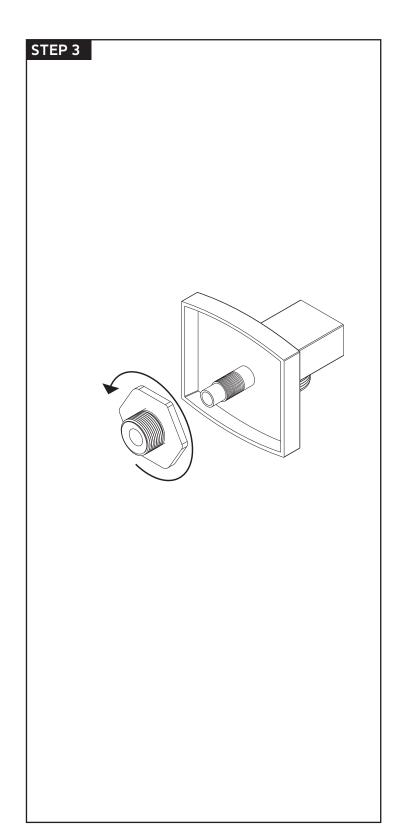


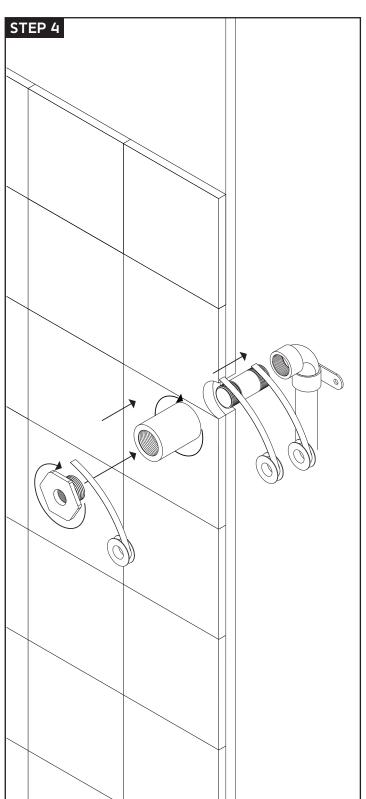


artos®


F907-47

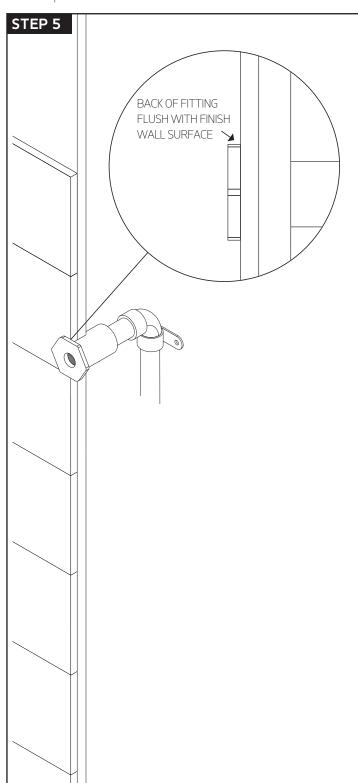

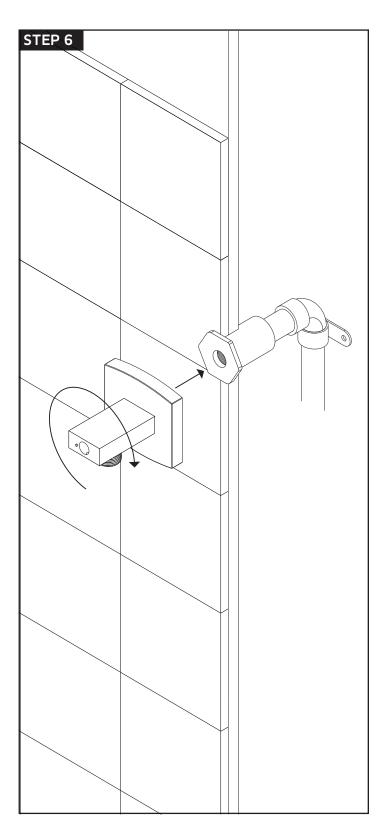


INSTALLATION STEPS

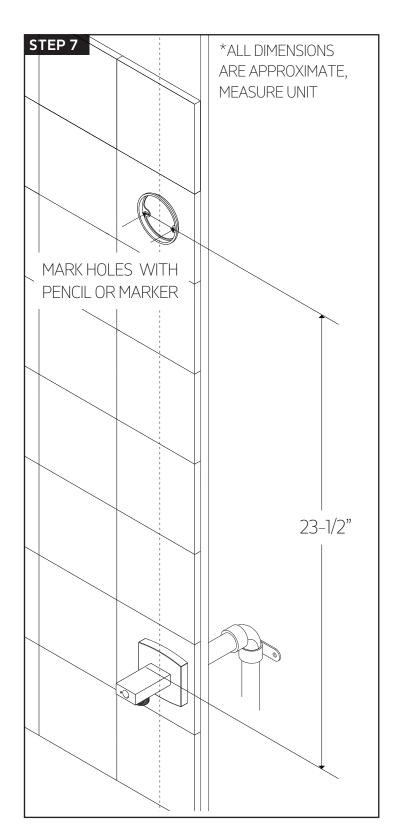


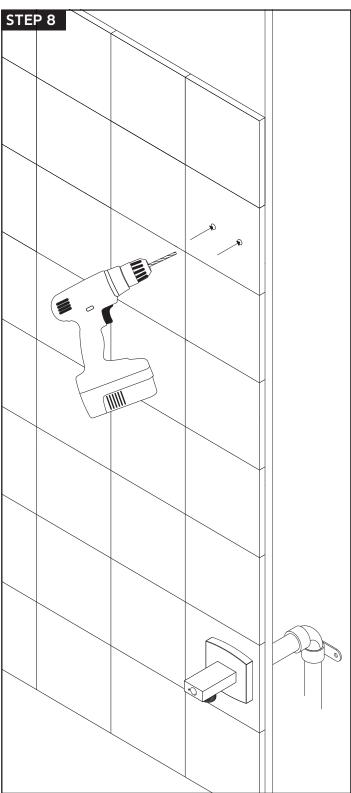


artos®

F907-47

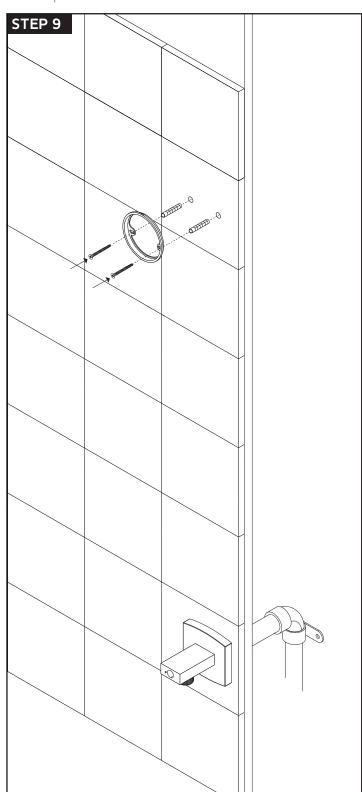

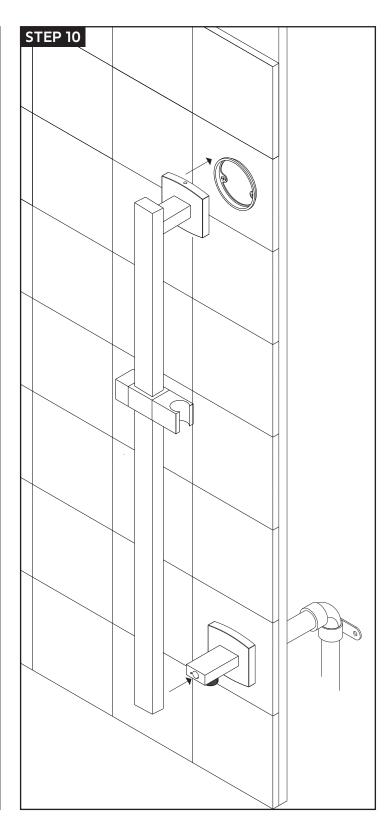


INSTALLATION STEPS

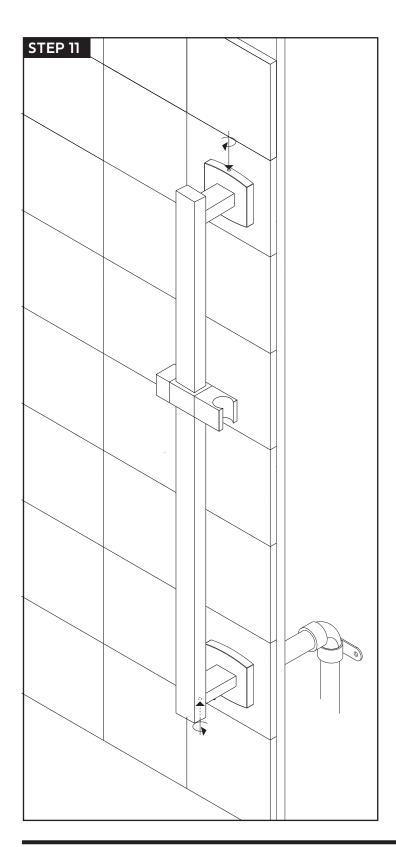

artos

F907-47

PARTS BREAKDOWN

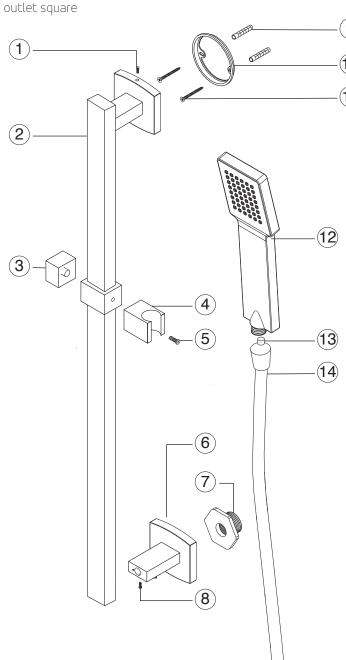

- (1) WALL BRACKET SET SCREW F907-46 XP1
- (2) **SLIDE BAR** F907-46 XP2
- (3) SLIDE BAR ADJUSTMENT HANDLE F907-46 XP3
- (4) HAND SHOWER HOLDER F907-46 XP4
- (5) HAND SHOWER HOLDER SCREW F907-46 XP5
- (6) SLIDE BAR INLET/OUTLET F907-46 XP6
- (7) **INLET ADAPTER** F907-46 XP7
- (8) SLIDE BAR INLET/OUTLET SET SCREW F907-46 XP8
- (9) **WALL ANCHORS** F907-46 XP9
- (10) WALL BRACKET F907-46 XP10
- (11) WALL BRACKET SCREWS F907-46 XP11
- (12) HAND SHOWER F907-46 XP12
- (13) HAND SHOWER CHECK VALVE F907-46 XP13
- **(14) HAND SHOWER HOSE** F907-46 XP14



F907-47

CARE & MAINTENANCE

flexible hose shower kit with slide bar and separate water outlet square

For best results, keep the following in mind to retain the high quality finish of your $artos^*$ shower kit:

- •Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

argantle S shower kits are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **F907-47** SERIAL NO.