

# artos<sup>®</sup>

## MR06560W

## INSTALLATION GUIDE

ryton towel warmer,  
hardwired

BRUSHED NICKEL(BN)



OIL RUBBED BRONZE(OB)



CHROME(CH)



WHITE(WH)



POLISHED NICKEL(PN)



BLACK(BK)



MR06560W

## OPERATING SPECIFICATIONS

ryton towel warmer,  
hardwired



### FEATURES

Towel warming, drying and auxiliary heating.

### ELEMENT

300W, 110V

### CODES

UL Approved  
CSA-US Approved

### REQUIREMENTS



The towel warmer must be installed so that the Element is at the bottom.

# artos<sup>®</sup>

## MR06560W

## PRODUCT DIMENSIONS

ryton towel warmer,  
hardwired

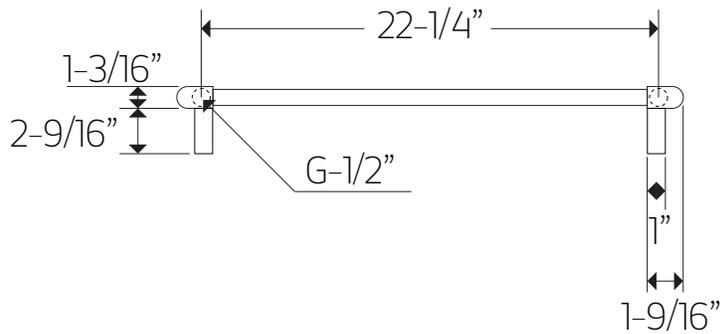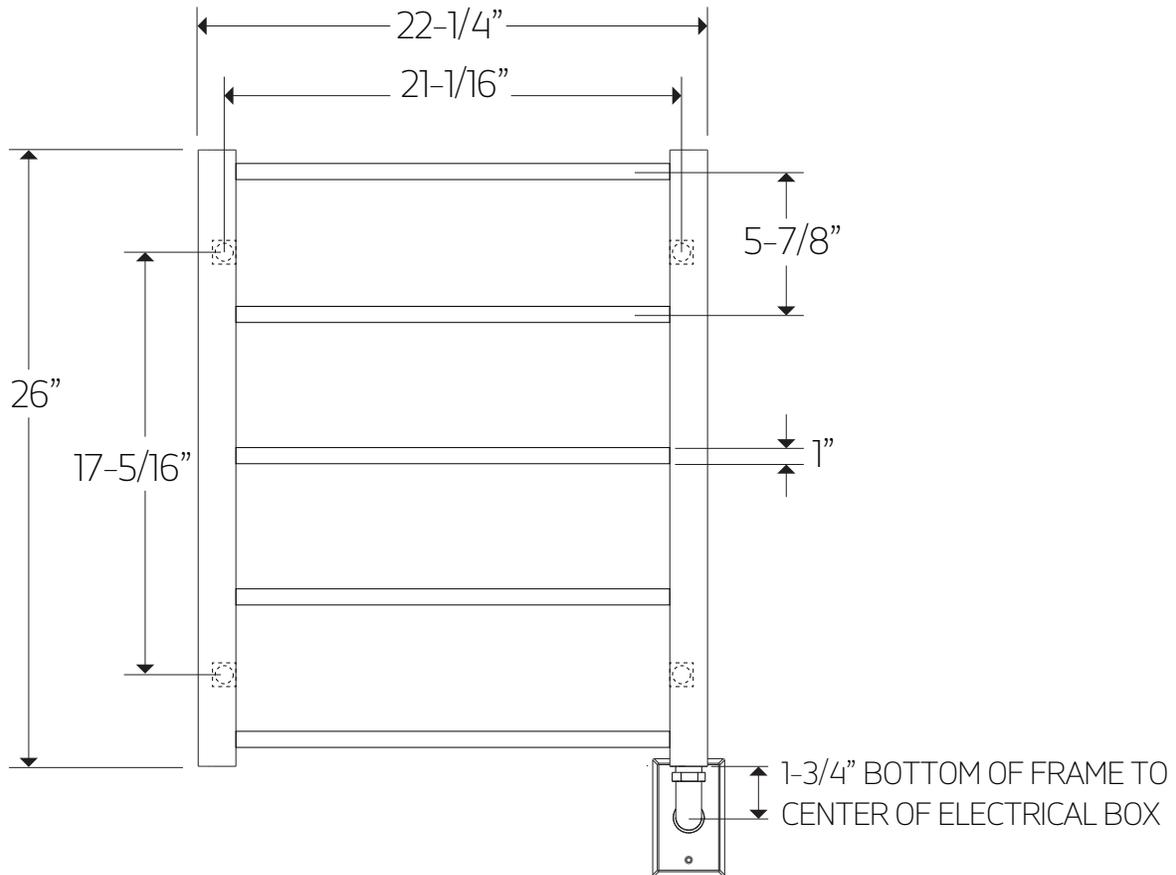


# MR06560W


ryton towel warmer,  
hardwired

## STEP 1

\*DIMENSIONS ARE APPROXIMATE FOR  
BLOCKING PURPOSES, PLEASE MEASURE UNIT

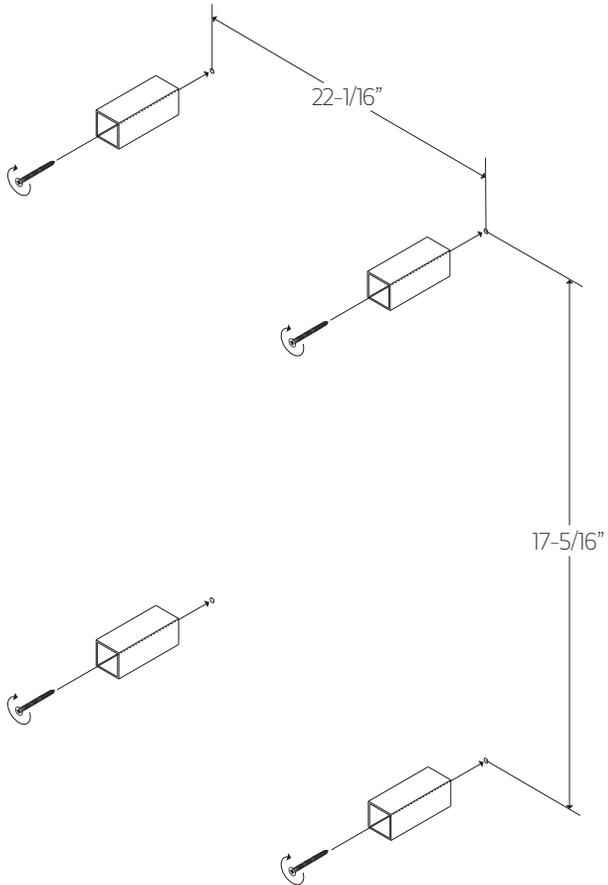


## STEP 2

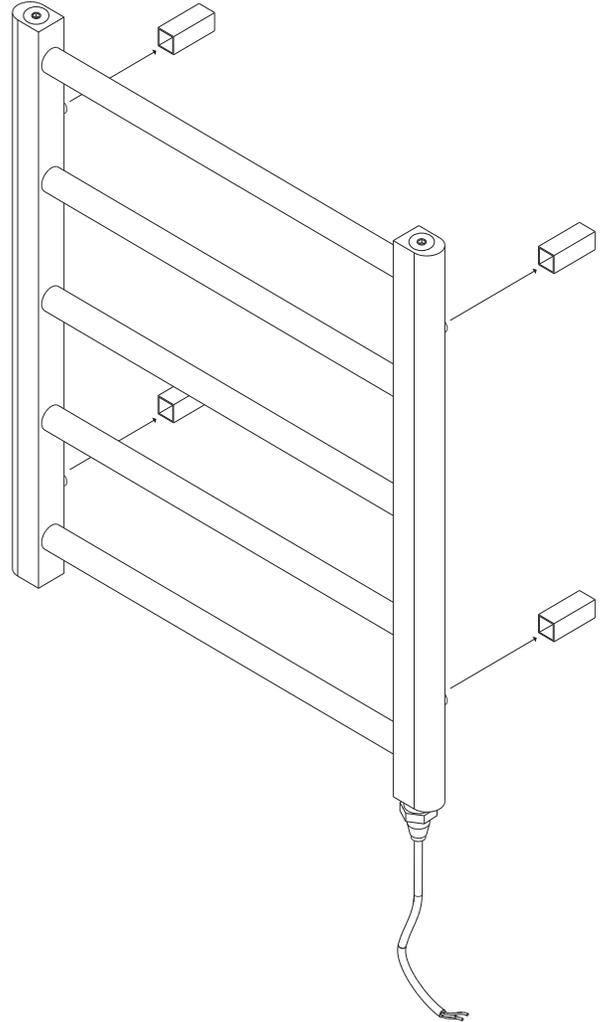

WE RECOMMEND THAT AT LEAST  
2 OF THE WALL BRACKETS ARE  
SECURED INTO A STUD OR BACKER



# INSTALLATION STEPS

## STEP 3

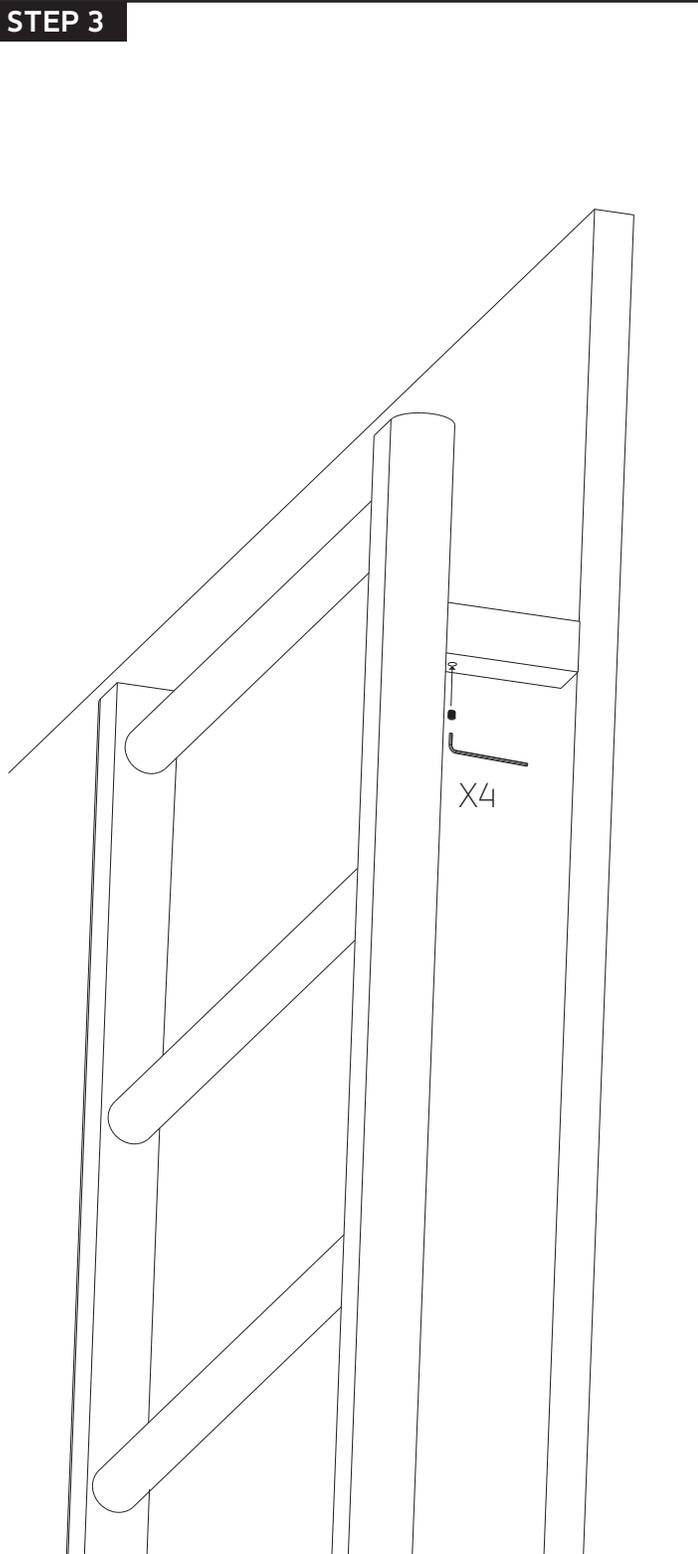

## STEP 4

CHOOSE TIMER POSITION TO SUIT SITUATION

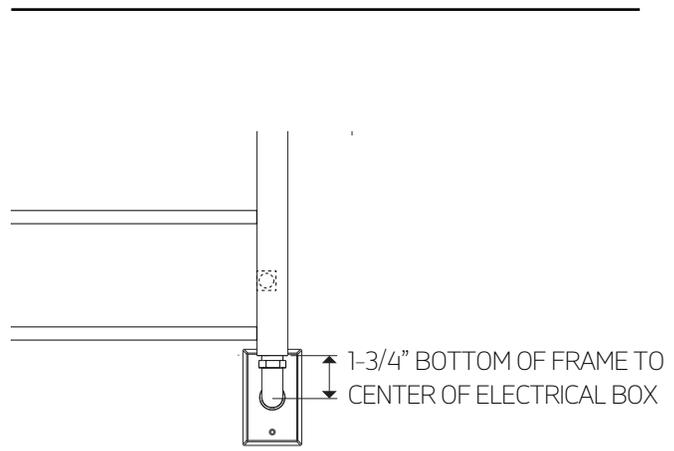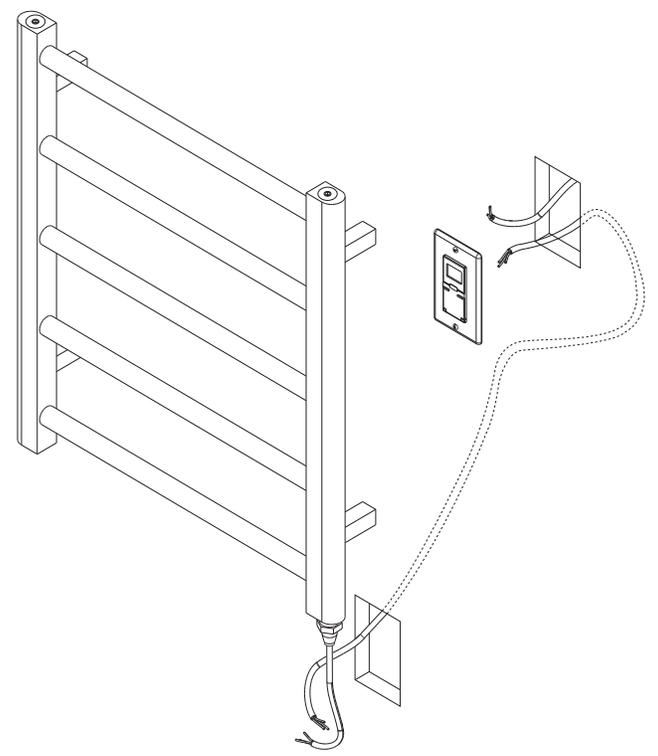


MR06560W


**INSTALLATION STEPS**

ryton towel warmer,  
hardwired

**STEP 5**

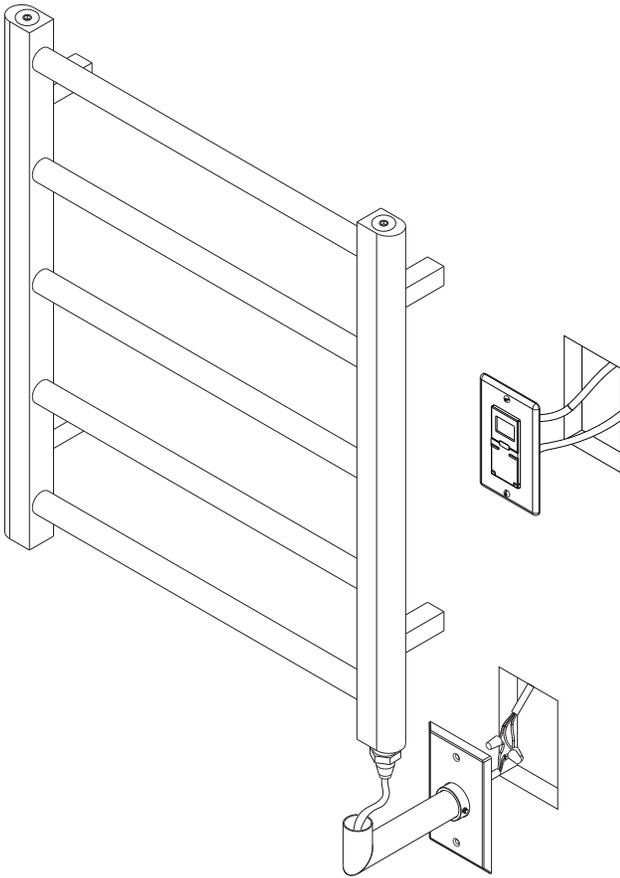

**STEP 6**

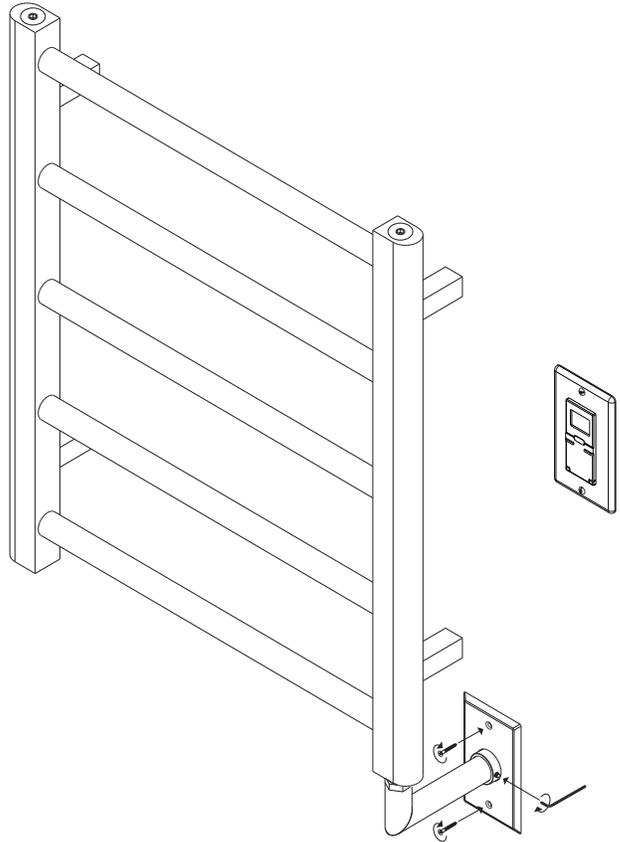


# artos<sup>®</sup>

## MR06560W

## PARTS BREAKDOWN

ryton towel warmer,  
hardwired

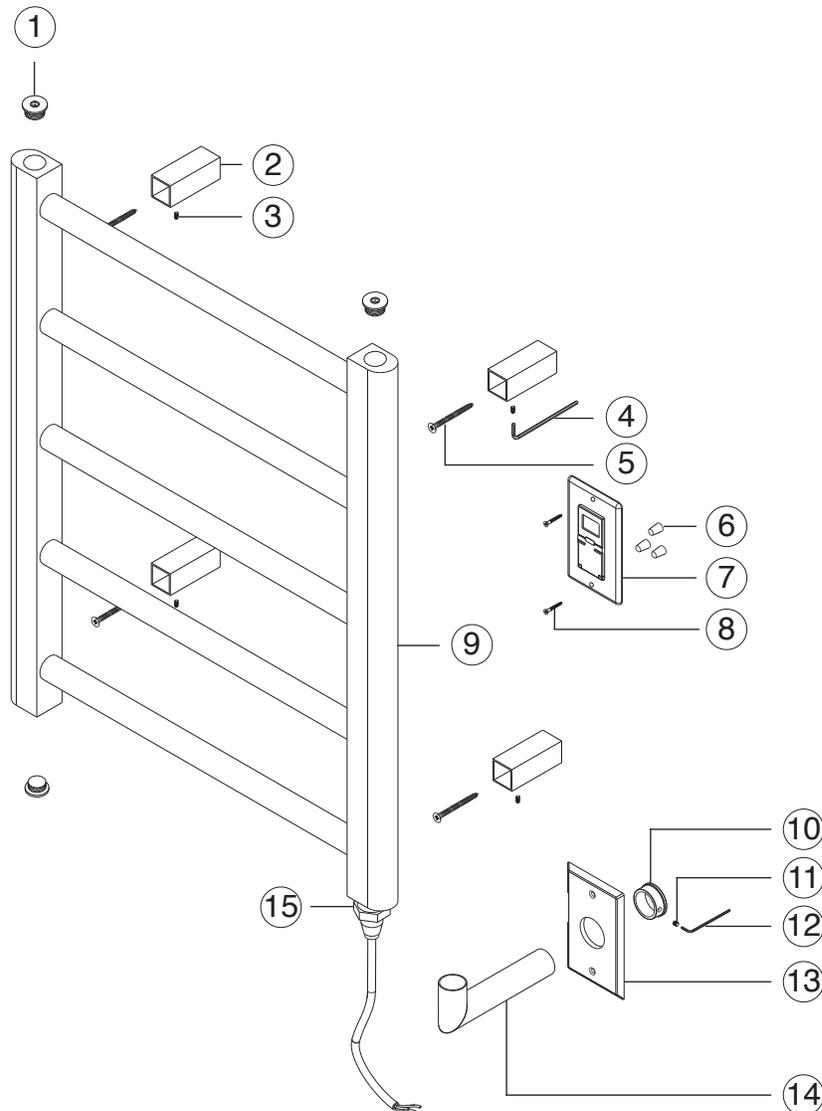

- |  |  |
|--|--|
| ① <b>BLANKING CAP(3)</b> MR06560W XP1      | ⑩ <b>ELBOW SECURING SLEEVE</b> MR06560W XP10 |
| ② <b>WALL BRACKET(4)</b> MR06560W XP2      | ⑪ <b>ELBOW SET SCREW</b> MR06560W XP11       |
| ③ <b>BRACKET SET SCREW(4)</b> MR06560W XP3 | ⑫ <b>ALLEN WRENCH</b> MR06560W XP12          |
| ④ <b>ALLEN WRENCH</b> MR06560W XP4         | ⑬ <b>BACKPLATE</b> MR06560W XP13             |
| ⑤ <b>BRACKET SCREW(4)</b> MR06560W XP5     | ⑭ <b>ELBOW</b> MR06560W XP14                 |
| ⑥ <b>WIRE NUTS(3)</b> MR06560W XP6         | ⑮ <b>ELEMENT</b> MR06560W XP15               |
| ⑦ <b>TIMER</b> MR06560W XP7                |  |
| ⑧ <b>TIMER SCREWS(2)</b> MR06560W XP8      |  |
| ⑨ <b>TOWEL WARMER</b> MR06560W XP9         |  |

### **Artos® Warranty Decorative Towel Dryers**

Artos® towel dryers have been manufactured under the highest quality and manufacturing standards.

Artos® towel dryers have a 5-year warranty against leaks and manufacturing defects to the finish. The heating element itself has a 2-year warranty.

#### **For best results, keep the following in mind to retain the high quality finish of your Artos towel warmer:**

- Use a soft, dampened sponge or cloth. On no account should you use a abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry an water from the surface after each use.

This warranty applies to installations in the US, Canada and Mexico (North America). Commercial, Industrial or business uses are warranted for a period of one year from the original date of purchase. This warranty is non-transferable and applies exclusively to the original owner or end-user.

If a defect is found during normal use, Artos® will, at its election, repair, replace or make an appropriate adjustment. Damage caused by accident, misuse, abuse, improper installation or alteration will void the warranty.

This warranty does not cover replacement parts where damage is caused by normal wear and tear. Labor charges, installation or other incidental or consequential costs will not be covered. Replacement parts that qualify for warranty repair can be obtained by contacting Artos® at 1-877-9ARTOS9 or by e-mail at [info@artos.us.co](mailto:info@artos.us.co)

Proof of purchase (original sales receipt) from the original consumer purchaser must accompany all warranty claims. When submitting your claim in writing, please provide your name, address and telephone number.