

artos[®]

PS108

INSTALLATION GUIDE

premier series shower set

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)



artos[®]

PS108

premier series shower set

OPERATING SPECIFICATIONS



FEATURES

Solid Brass
3-Outlet

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

Hand Shower: 2.0 USGPM
Shower Head: 1.8 USGPM

F901-8 APPROVAL





artos[®]

PS108

PRODUCT DIMENSIONS



premier series shower set

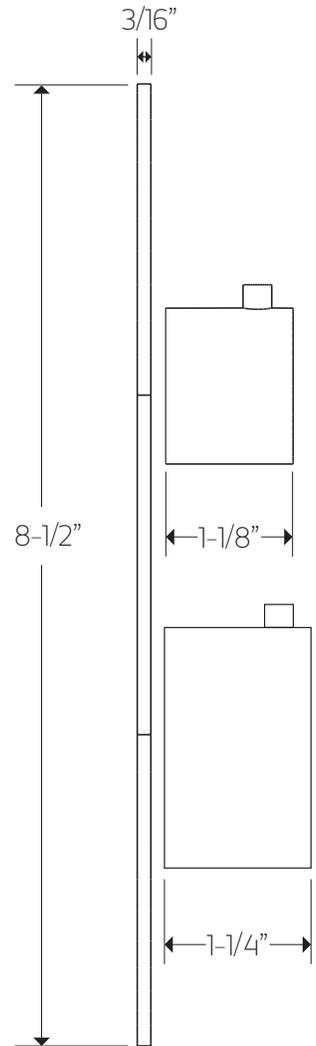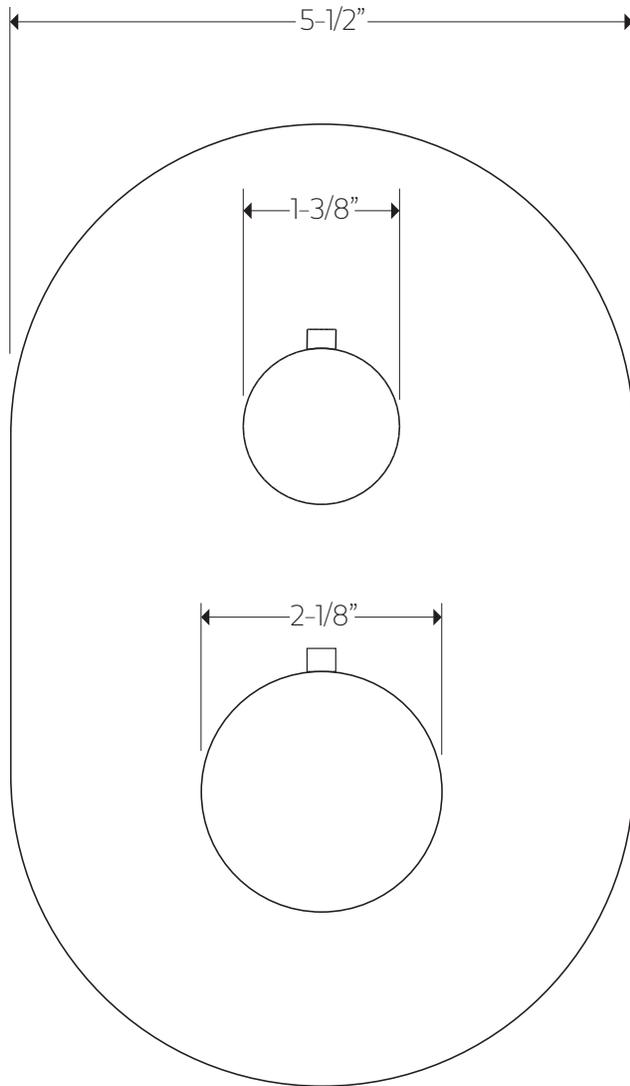



premier series shower set

F902-28

1/2" MALE THREAD

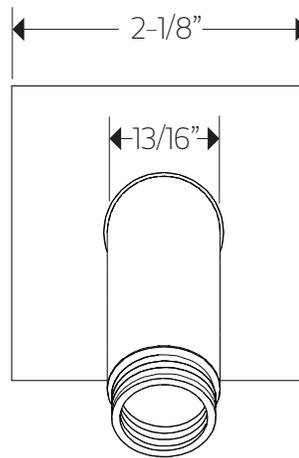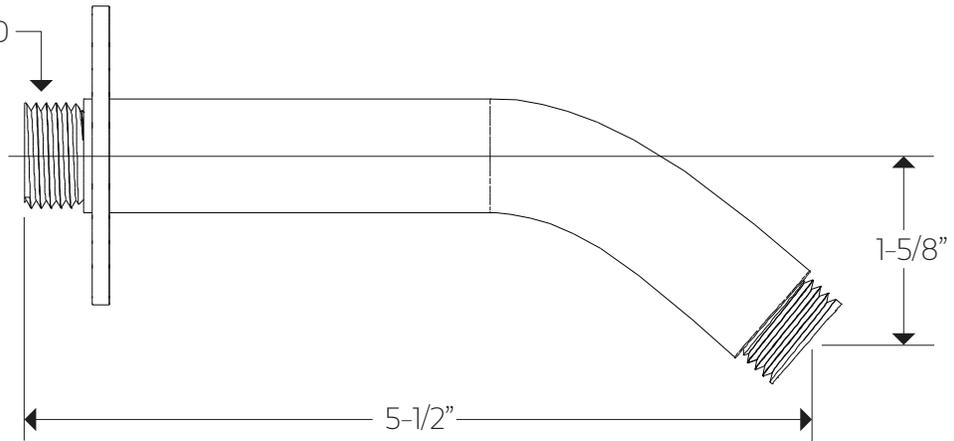


F901-19

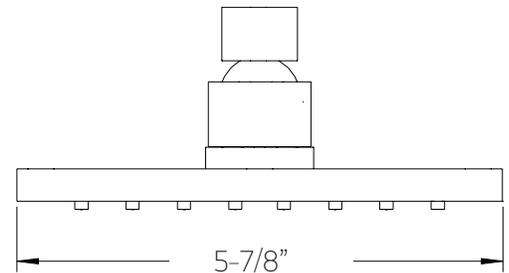
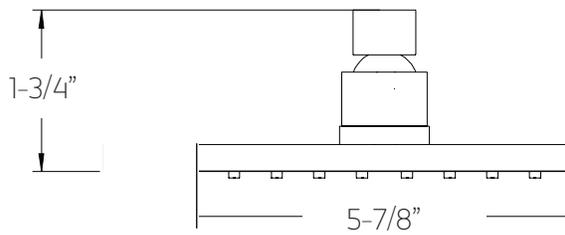


premier series shower set


F703-2/5AR

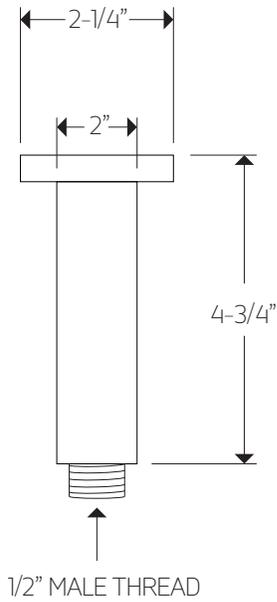


F901-19

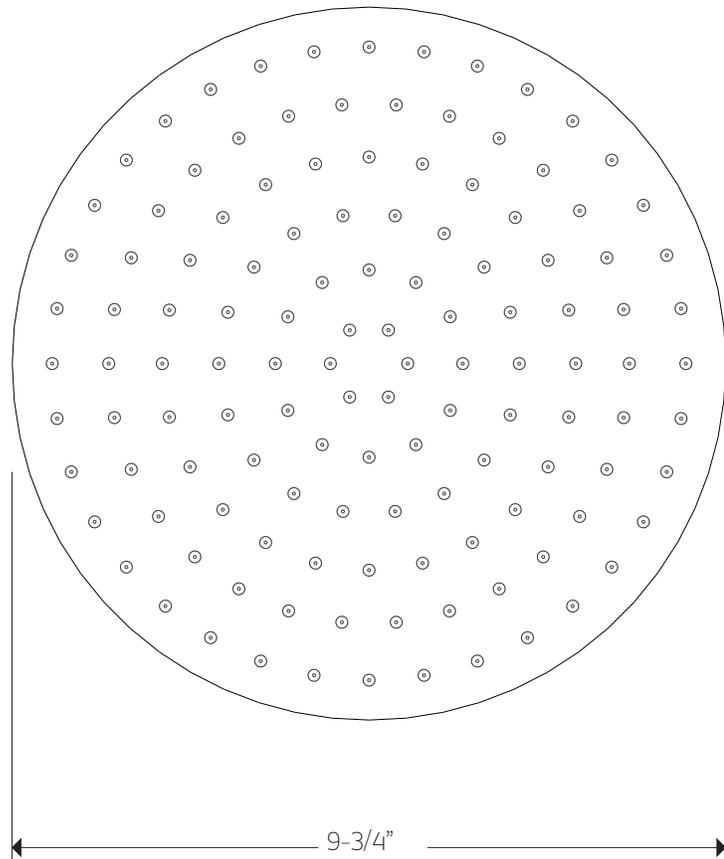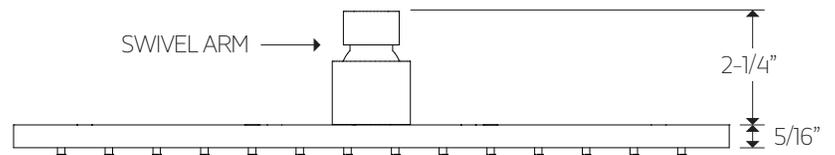

premier series shower set

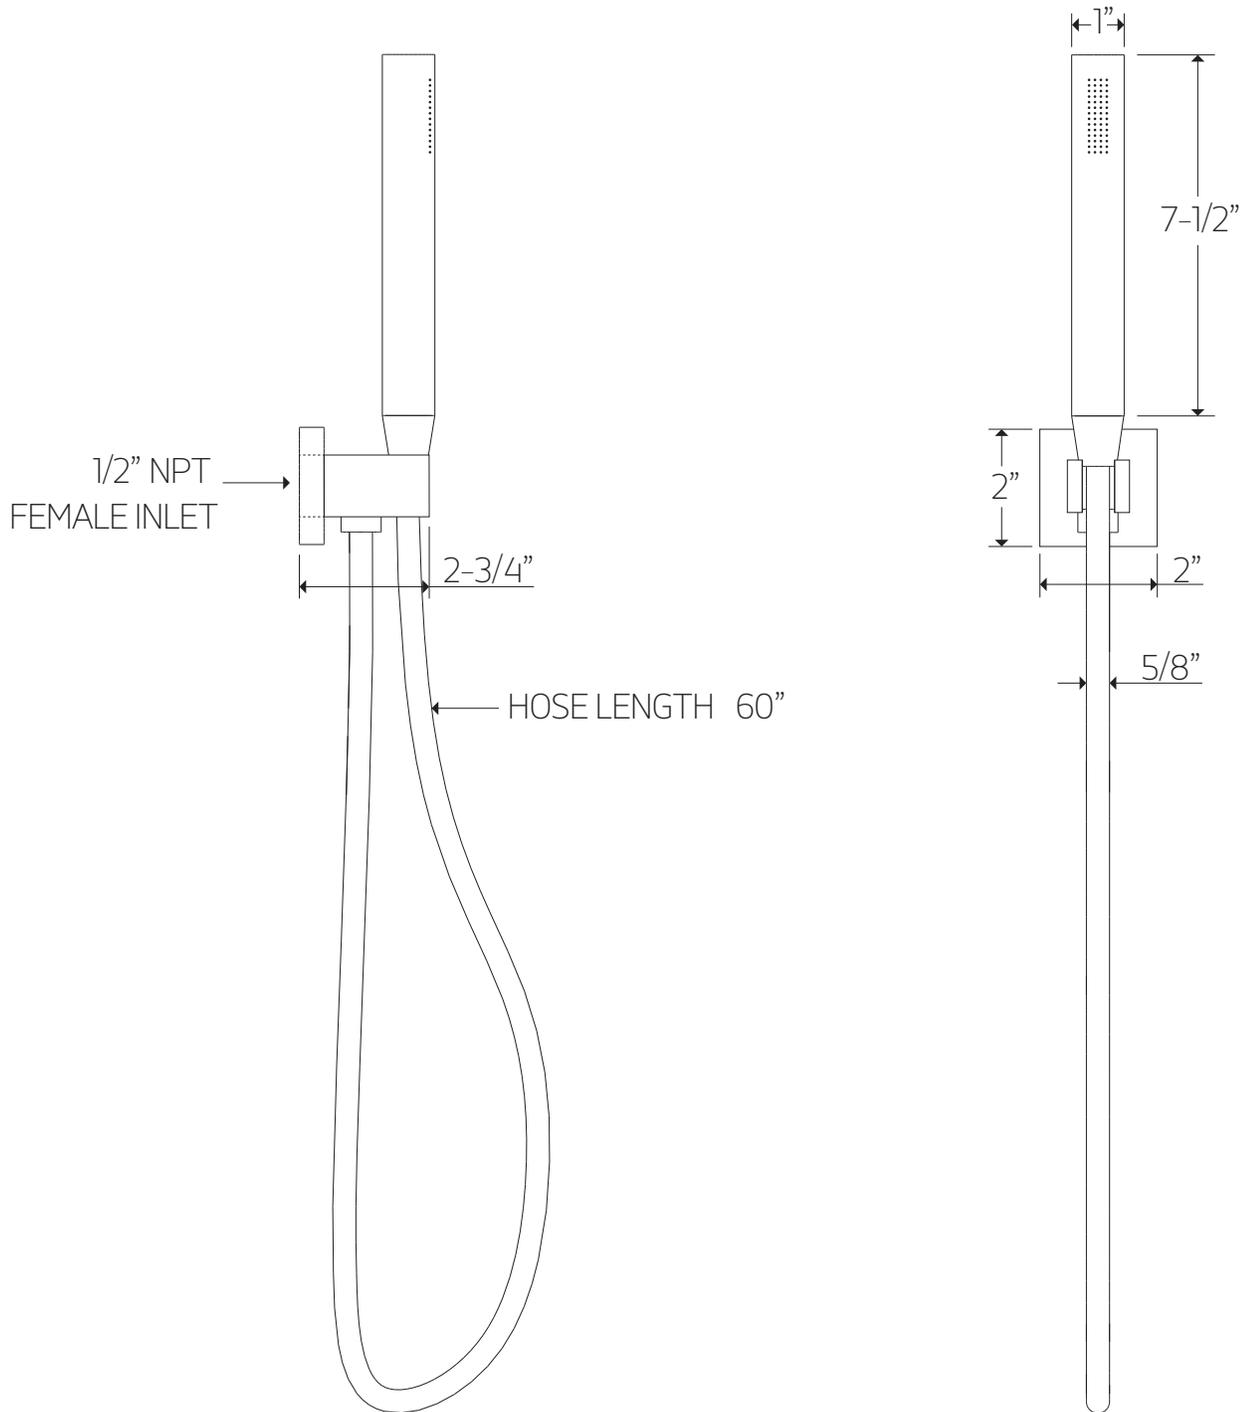


STEP 1

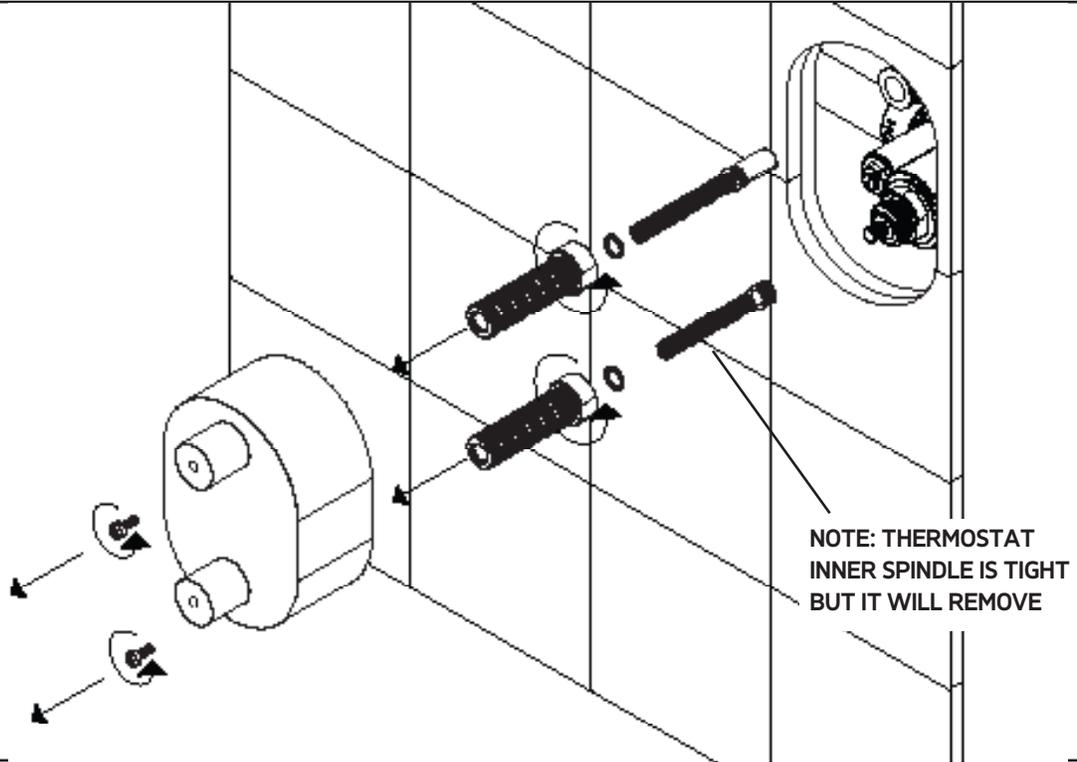


STEP 2


REFIT OUTER SPINDLES ONLY

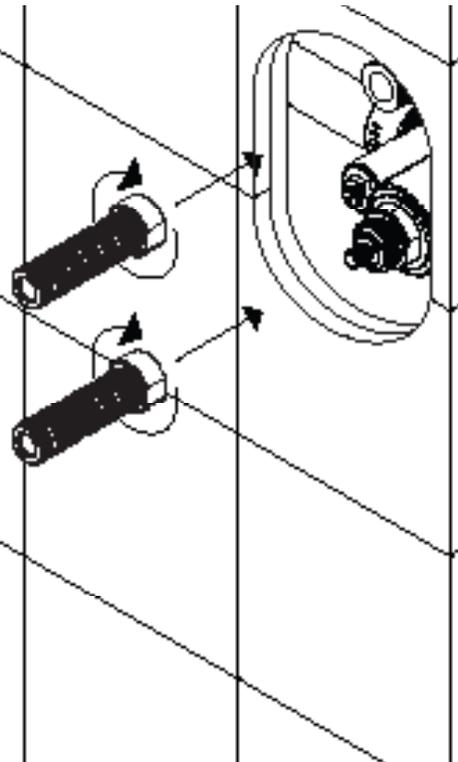


STEP 3

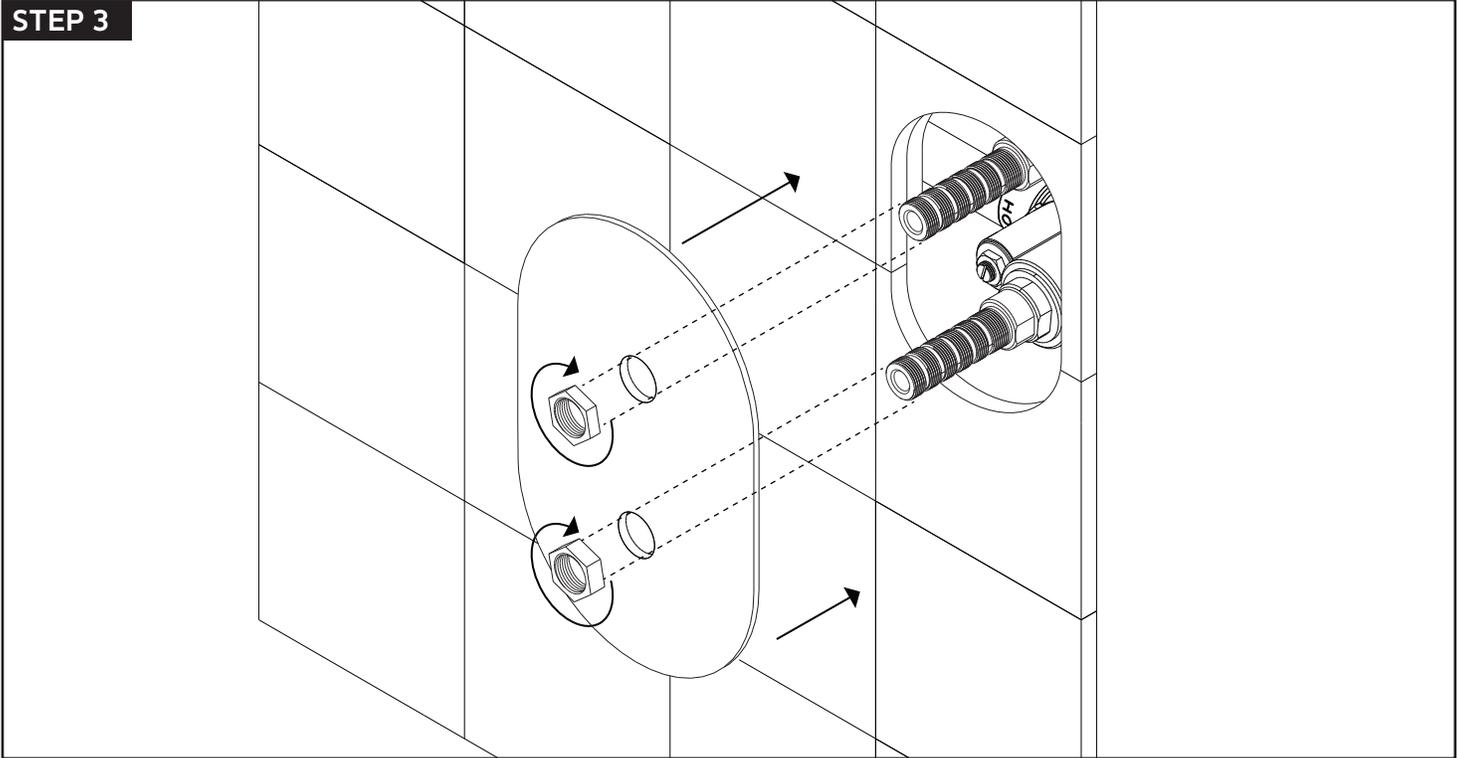


STEP 4

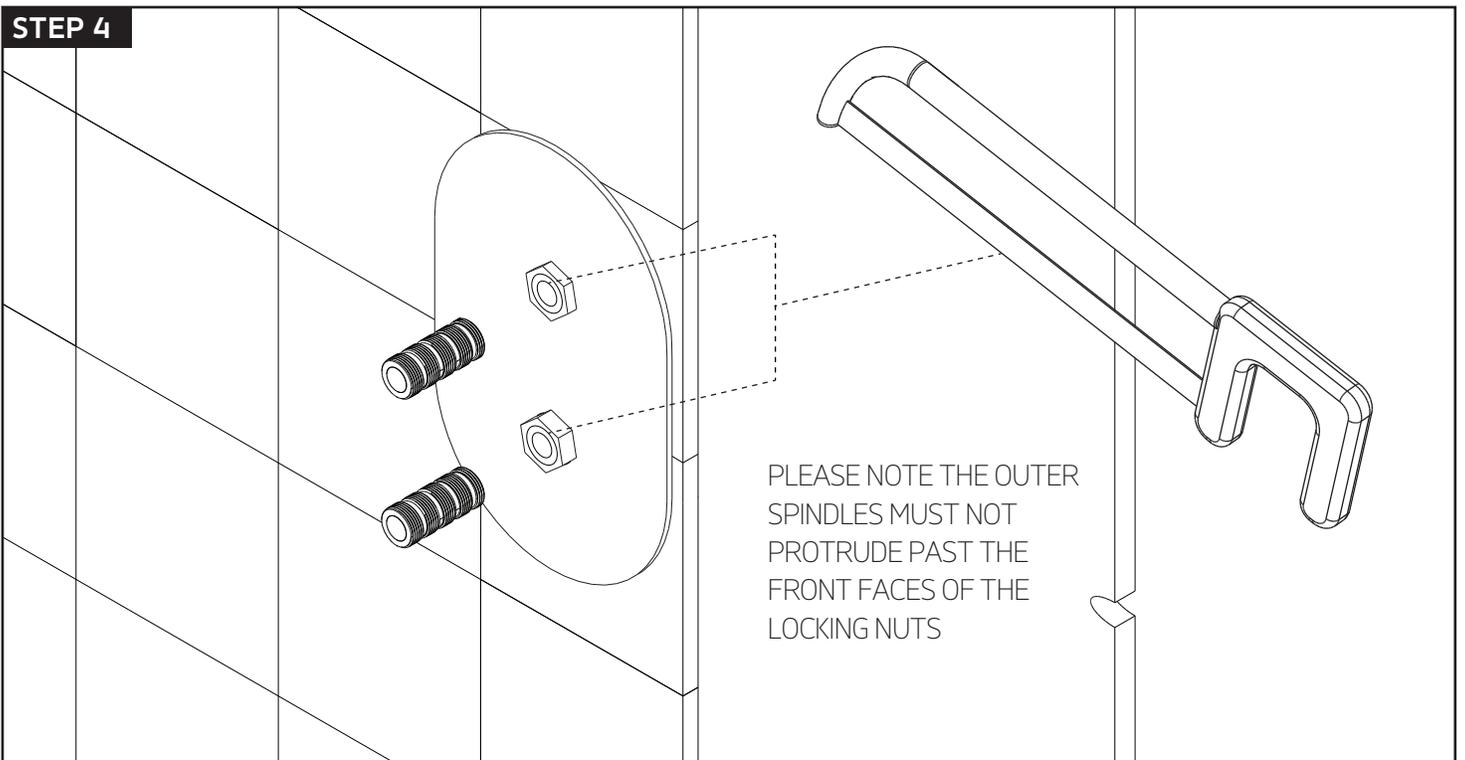


STEP 5

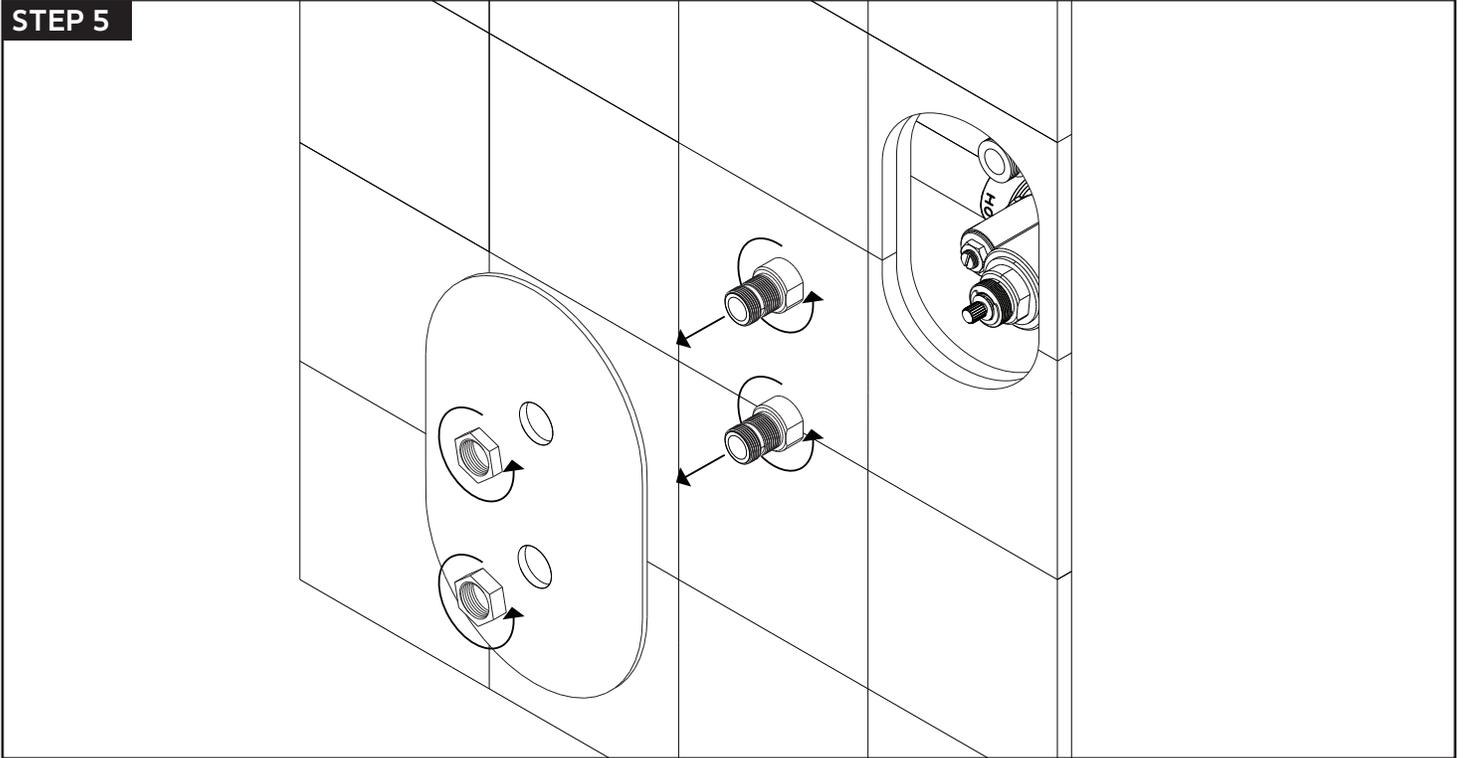


STEP 6

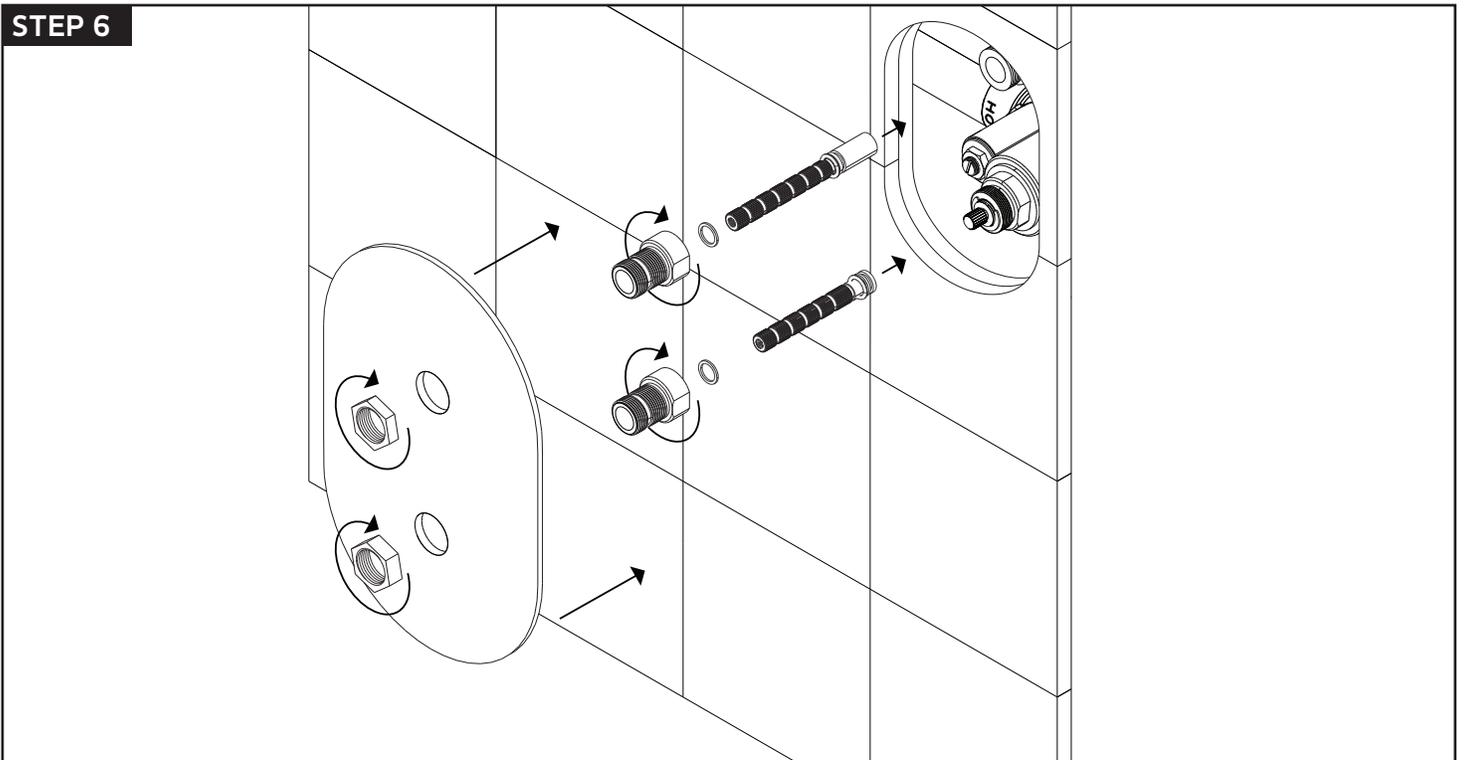





STEP 7

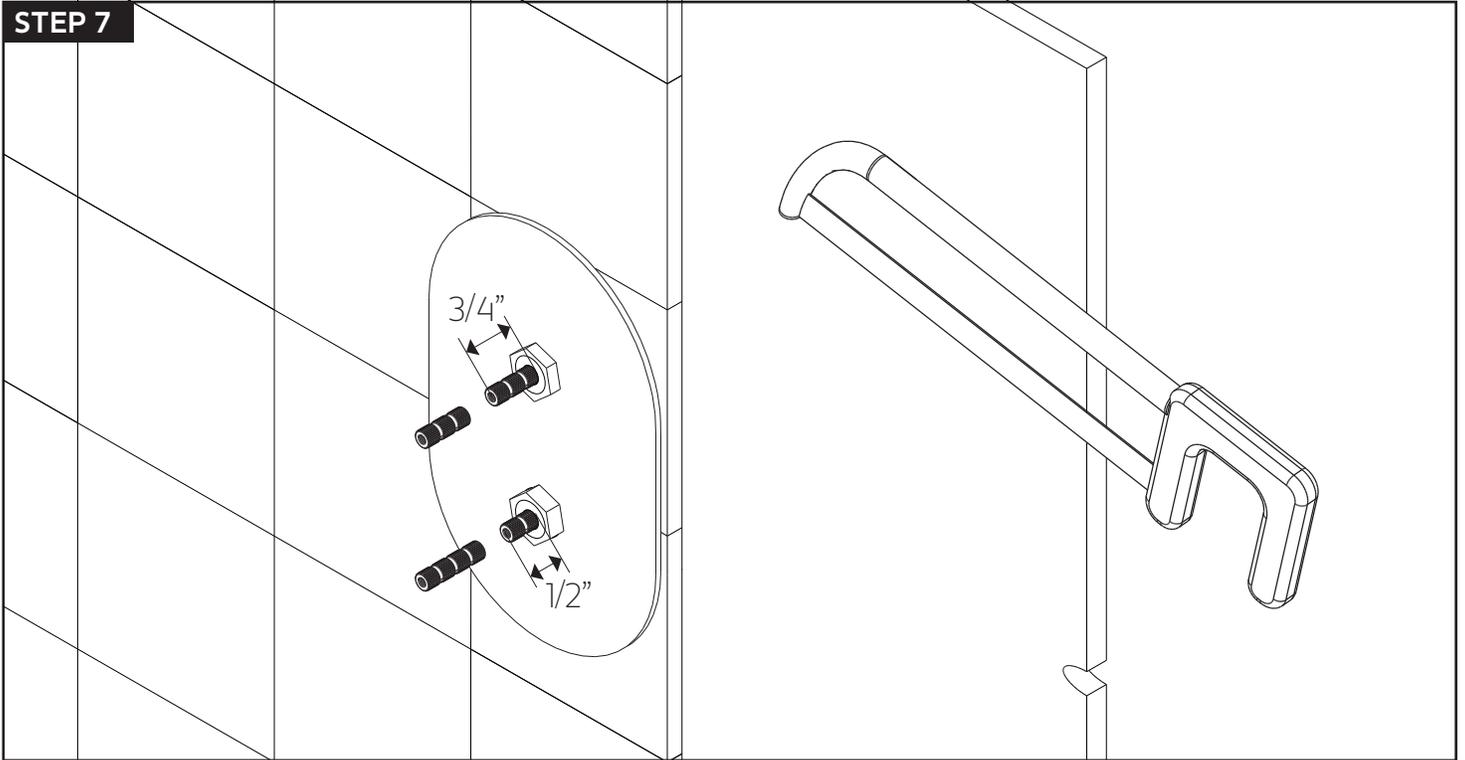


STEP 8

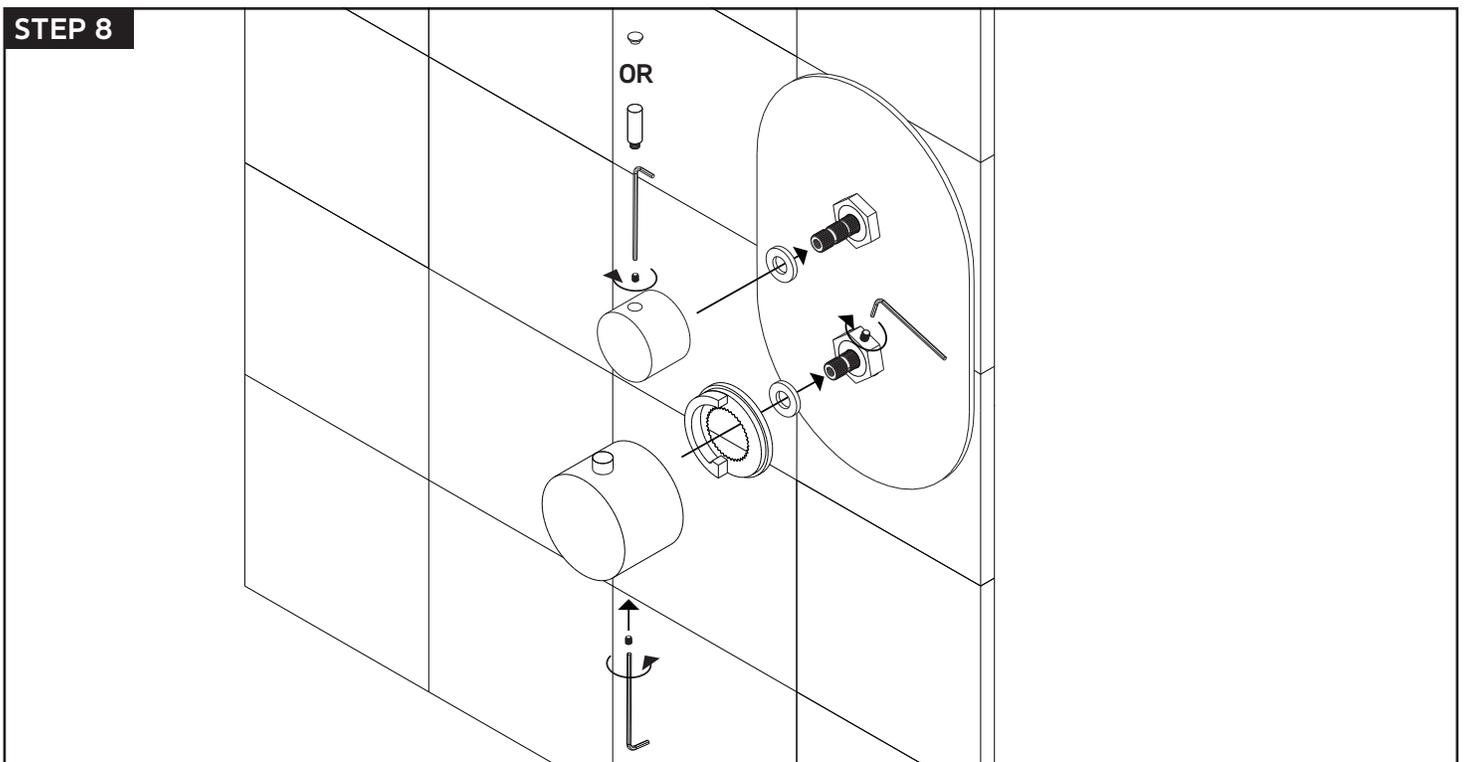


premier series shower set

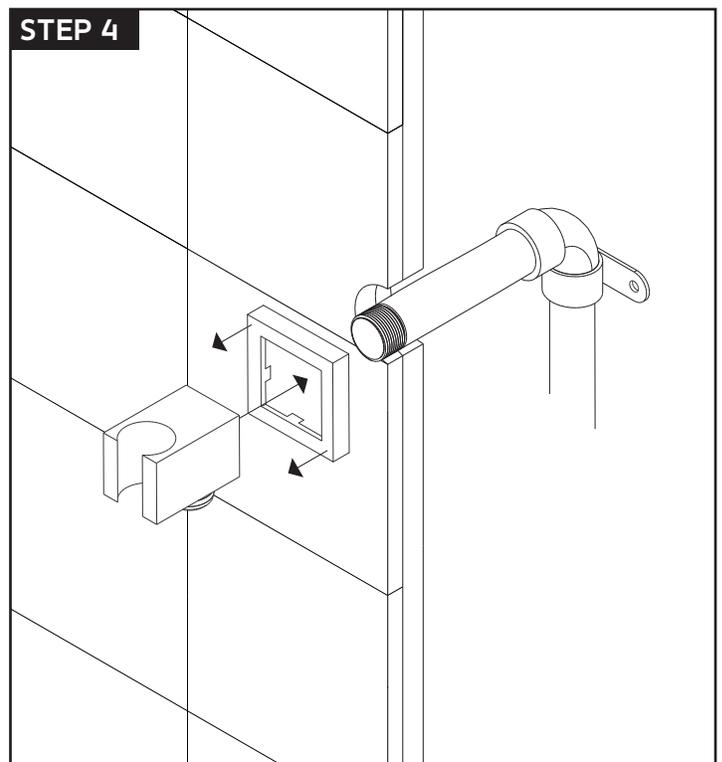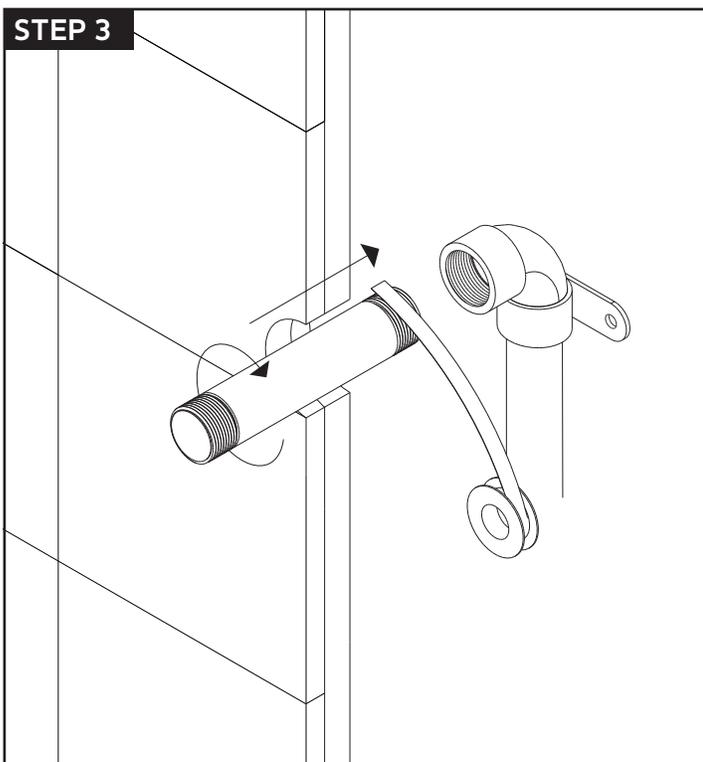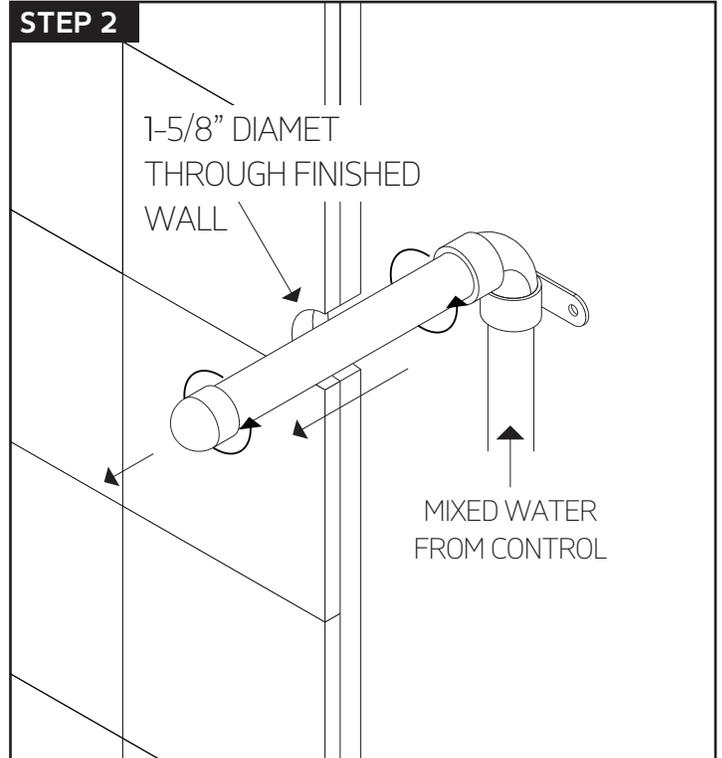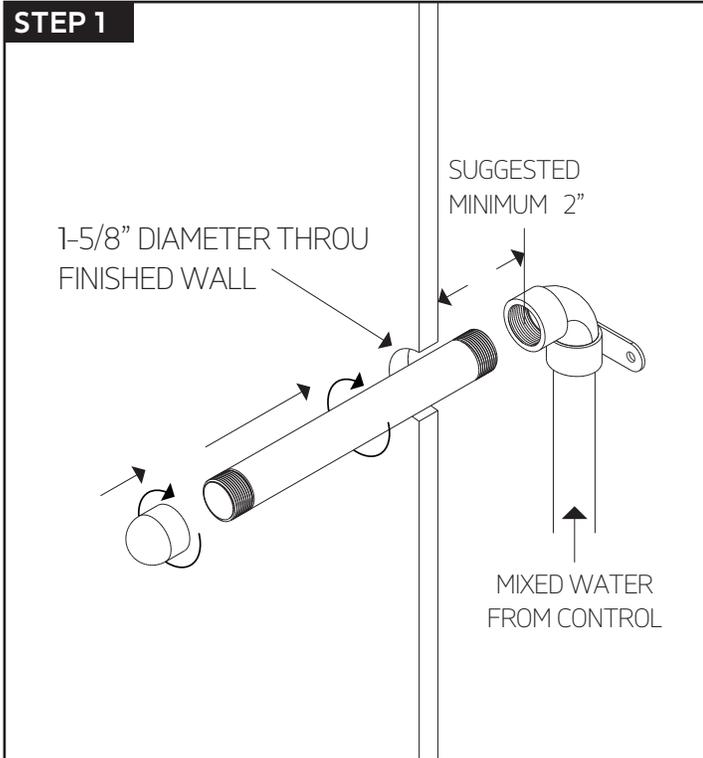



STEP 5

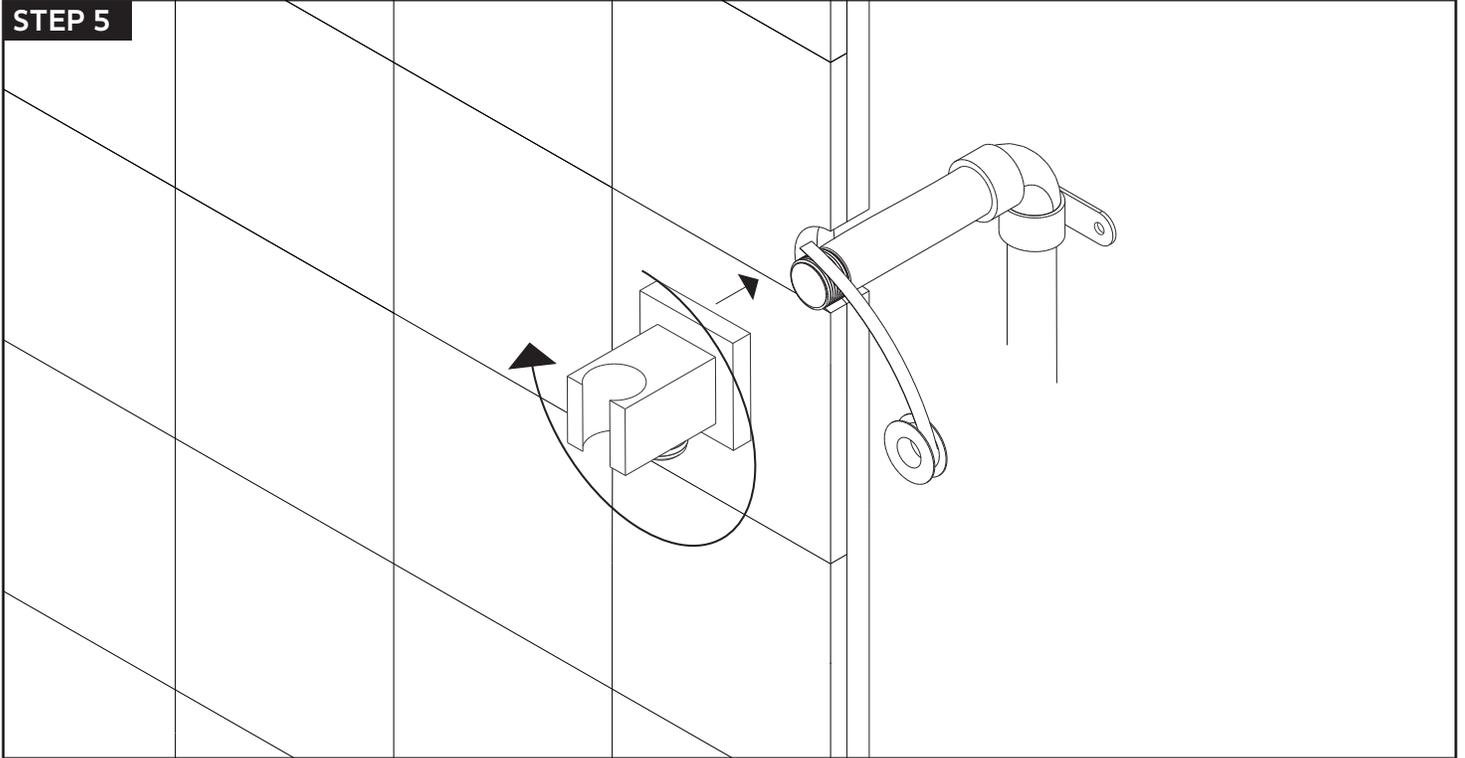


STEP 6

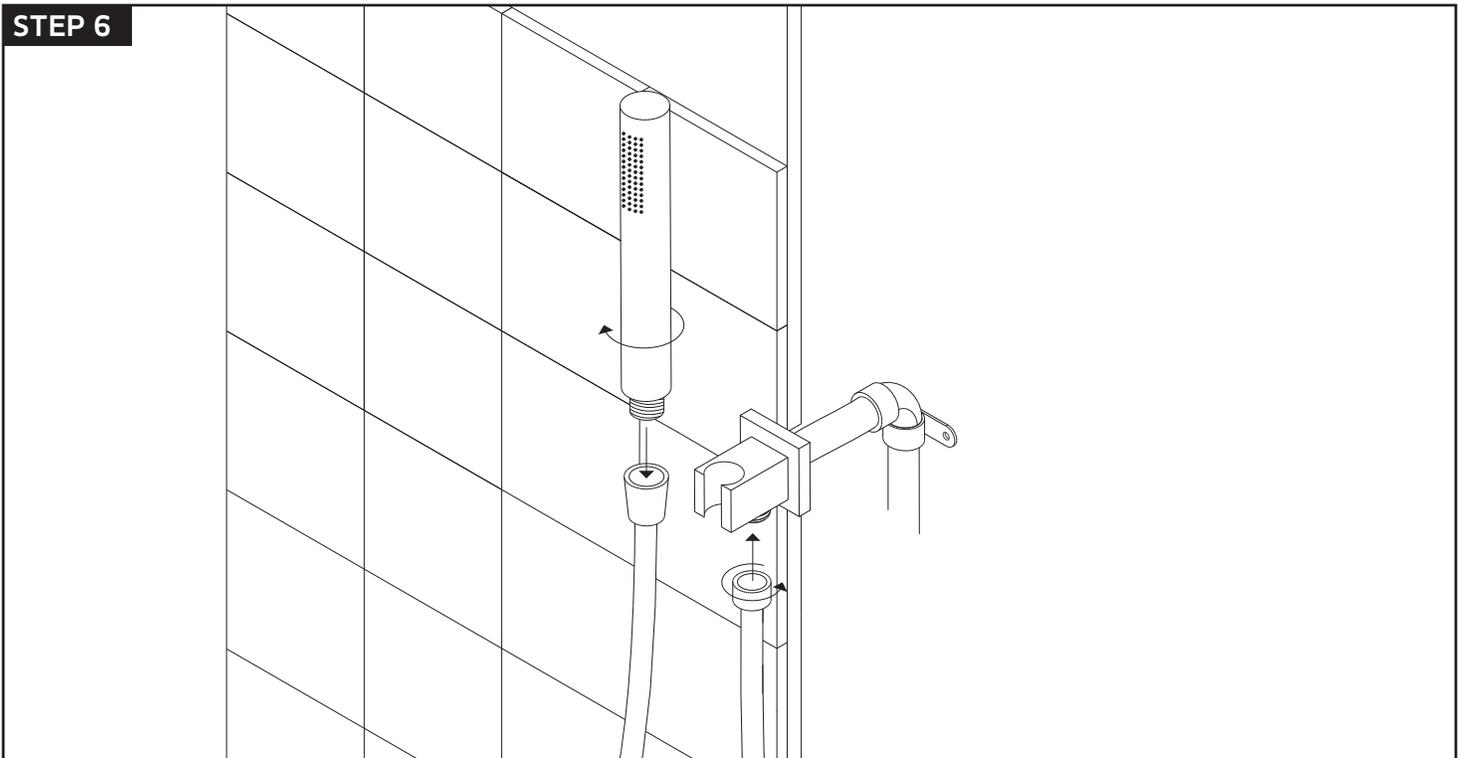

premier series shower set

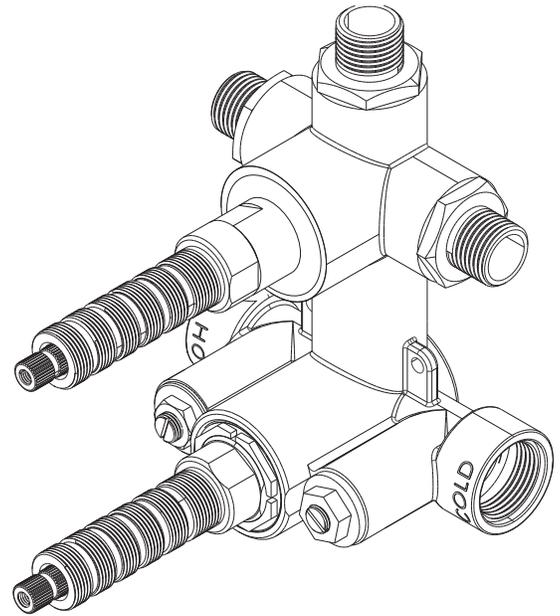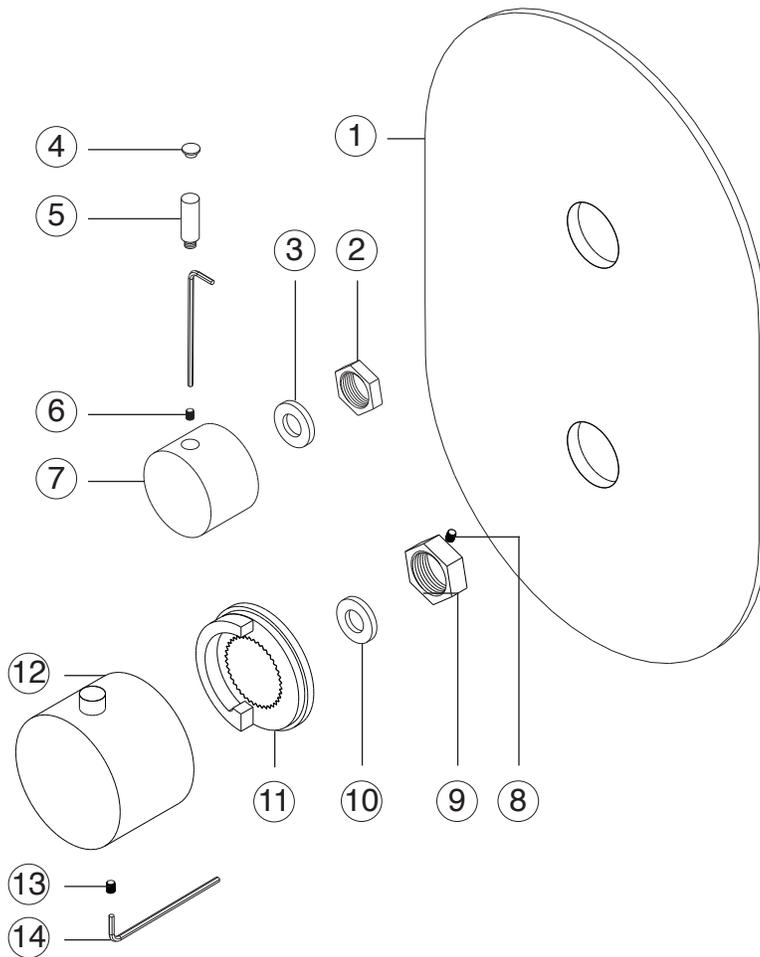

- | | |
|-------------------------|-----------------------------|
| ① ESCUTCHEON | ⑧ LOCKING NUT SET SCREW |
| ② DIVERTER LOCKING NUT | ⑨ THERMOSTAT LOCKING NUT |
| ③ NYLON WASHER | ⑩ NYLON WASHER |
| ④ HANDLE HOLE CAP | ⑪ TEMPERATURE LIMITING RING |
| ⑤ DIVERTER HANDLE LEVER | ⑫ THERMOSTAT HANDLE |
| ⑥ DIVERTER SET SCREW | ⑬ THERMOSTAT SET SCREW |
| ⑦ DIVERTER HANDLE | ⑭ ALLEN WRENCH |

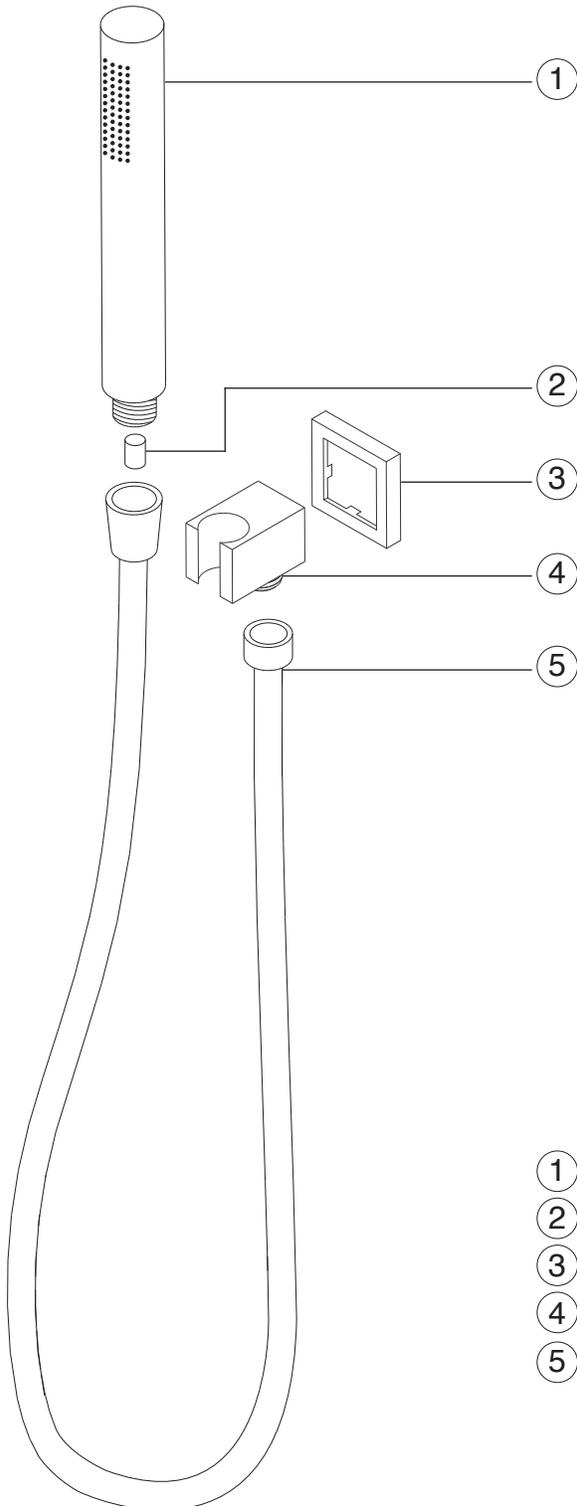

- ① HAND SHOWER
- ② HAND SHOWER CHECK VALVE
- ③ ESCUTCHEON PLATE
- ④ SHOWER OUTLET ELBOW AND HOLDER
- ⑤ TEKFLEX SHOWER HOSE

For best results, keep the following in mind to retain the high quality finish of your artos[®] shower kit:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

artos[®] shower kits are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **PS108**
SERIAL NO.