

# artos<sup>®</sup>

## PS109

## INSTALLATION GUIDE

premier series shower set

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)



# artos<sup>®</sup>

## PS109

premier series shower set

## OPERATING SPECIFICATIONS



### FEATURES

Solid Brass  
3-Outlets

### OPERATING PRESSURE

Minimum: 15 psi  
Maximum: 75 psi  
Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°



### FLOW CAPACITY

Hand Shower: 2.0 USGPM  
Shower Head: 1.8 USGPM

### F901-8 APPROVAL





premier series shower set

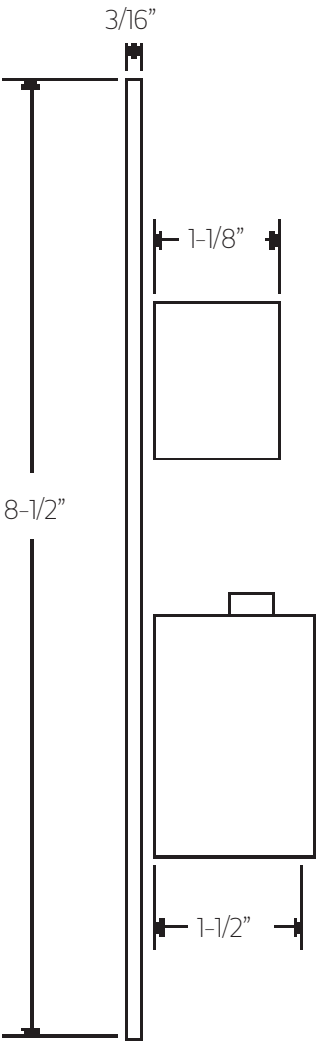
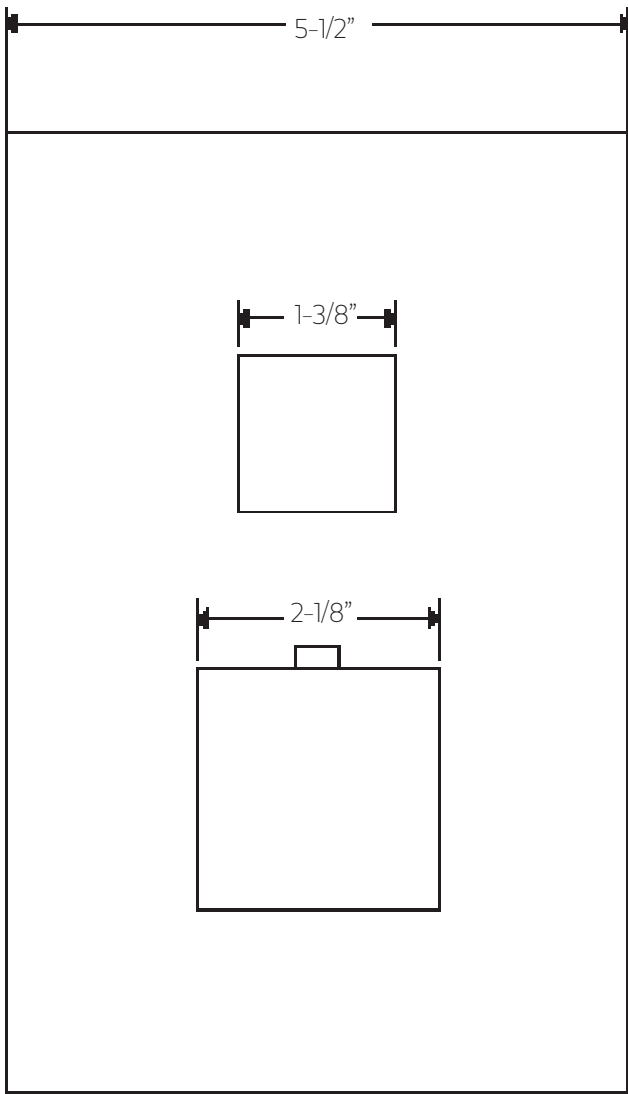


F902-28


1/2" MALE THREAD

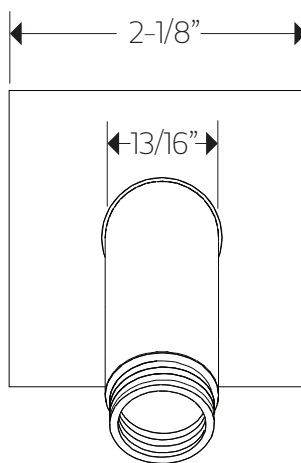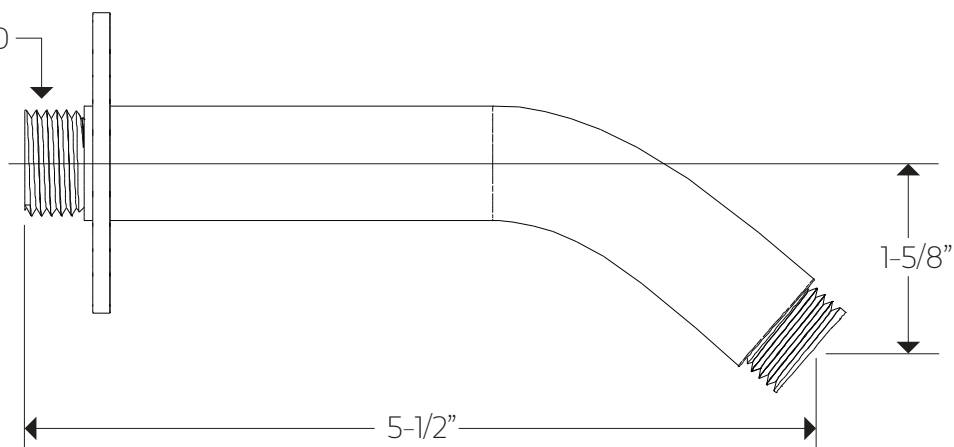



F901-19

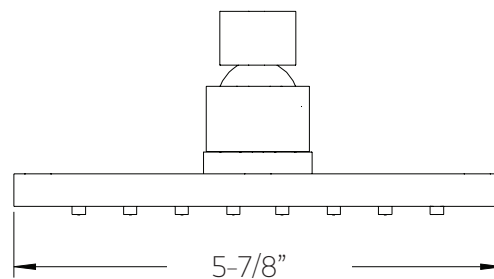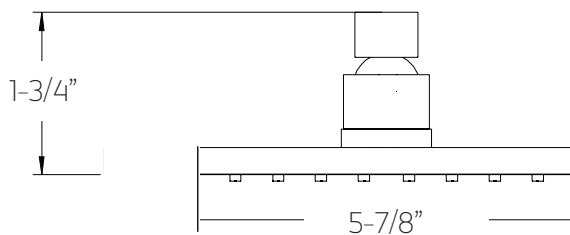

F703-2/5AR

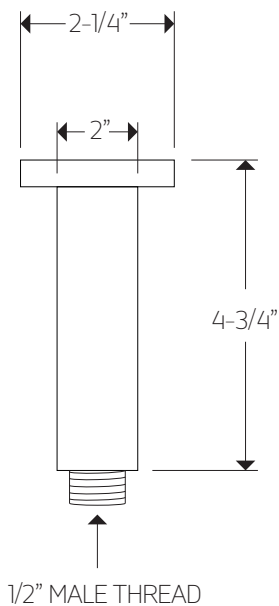

F901-19

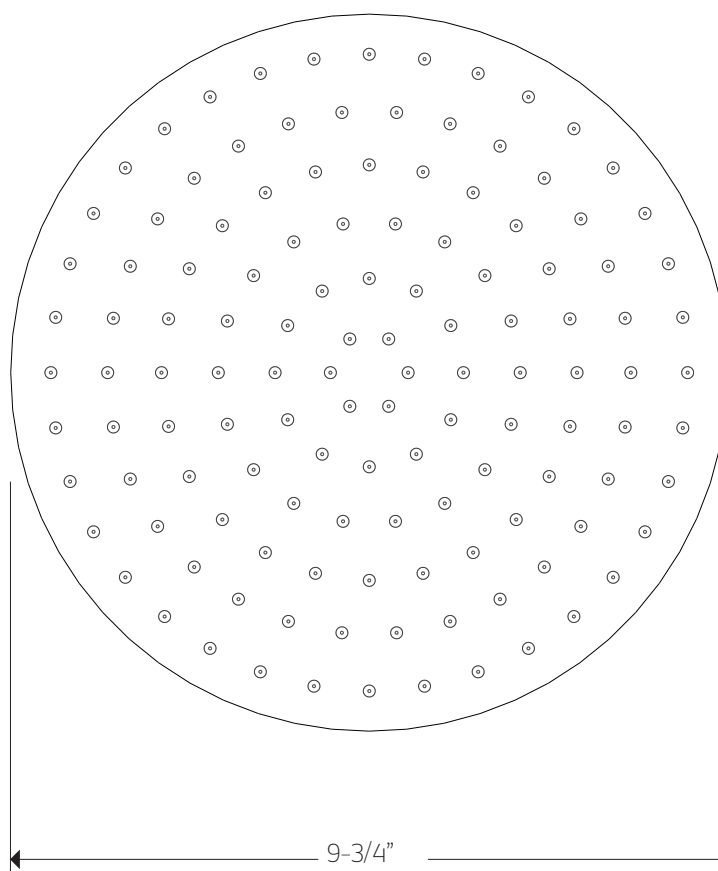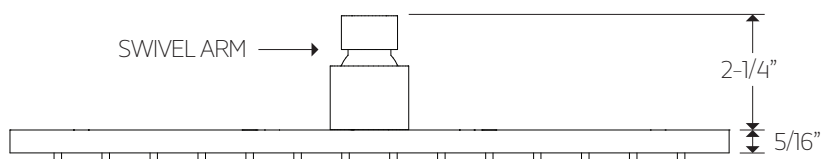


# artos<sup>®</sup>


PS109

## PRODUCT DIMENSIONS

premier series shower set

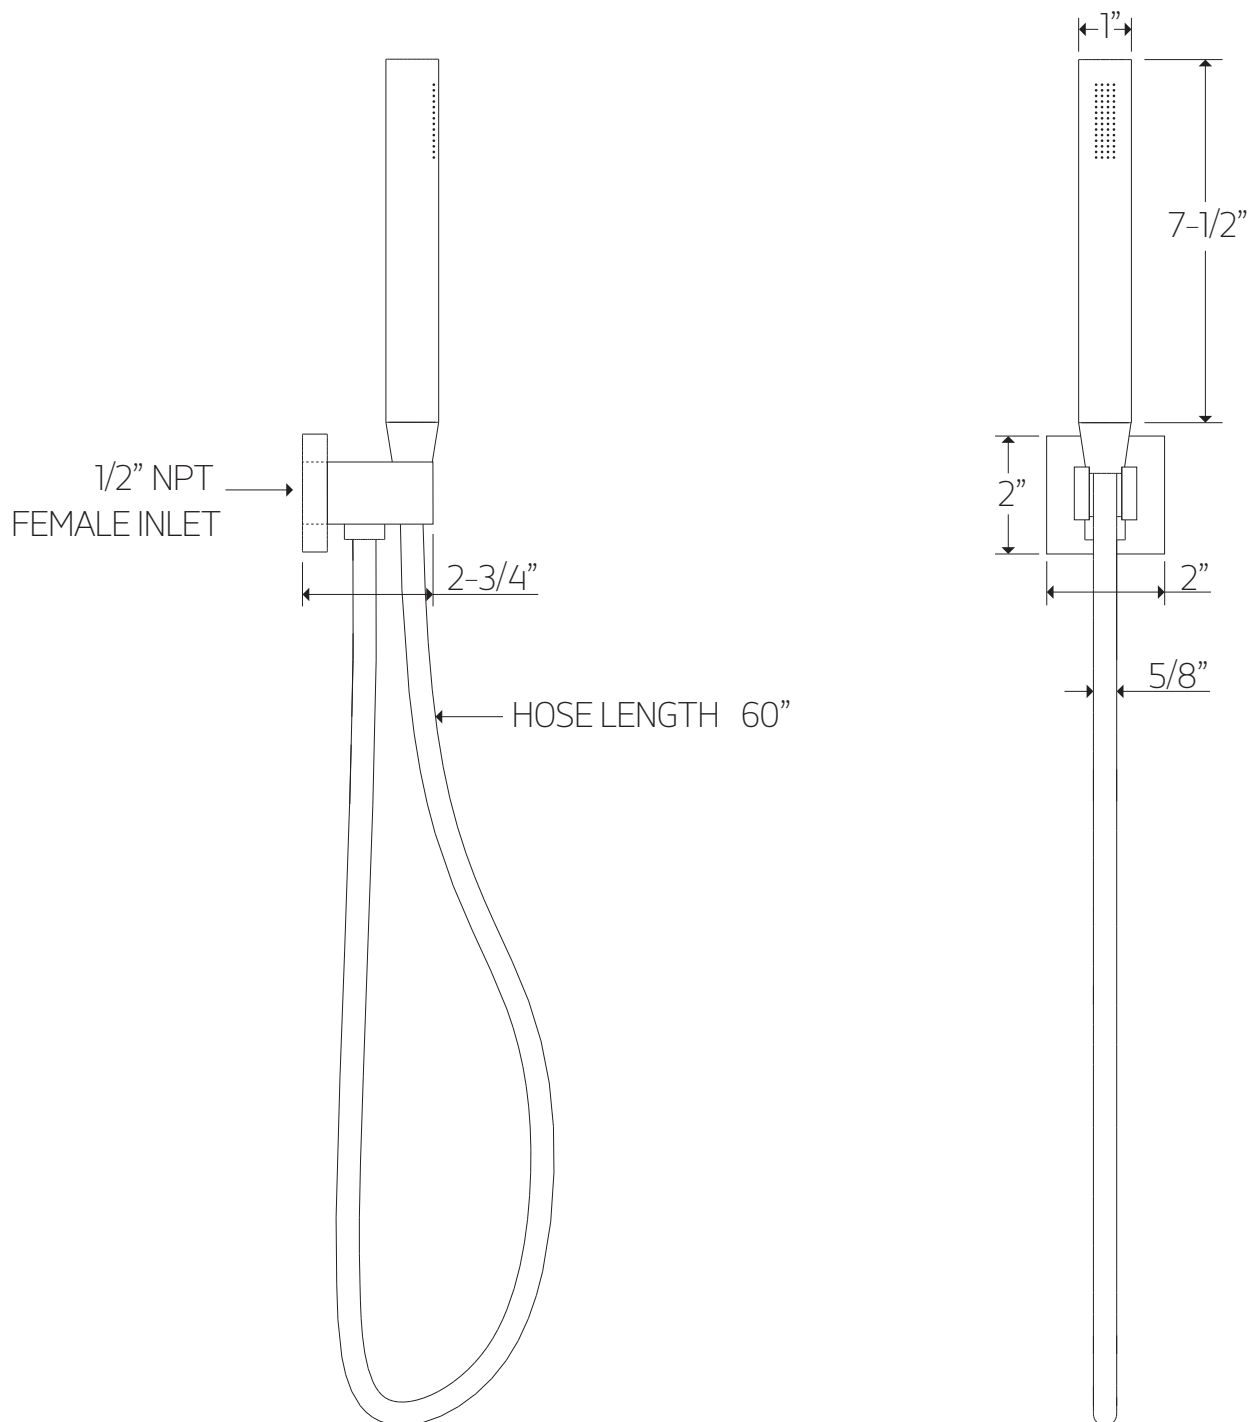


### STEP 1

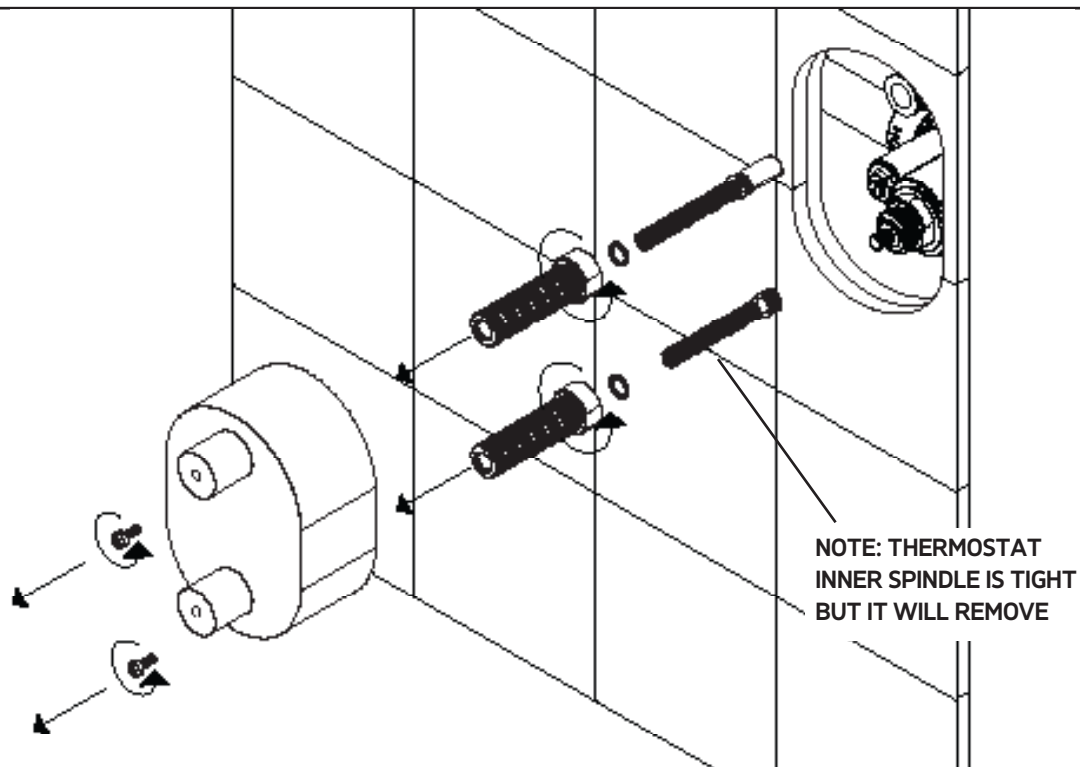


### STEP 2


REFIT OUTER  
SPINDLES ONLY

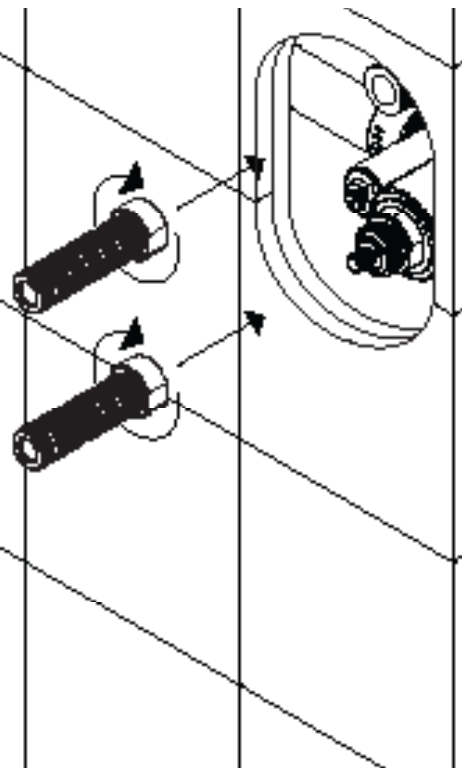

### STEP 3

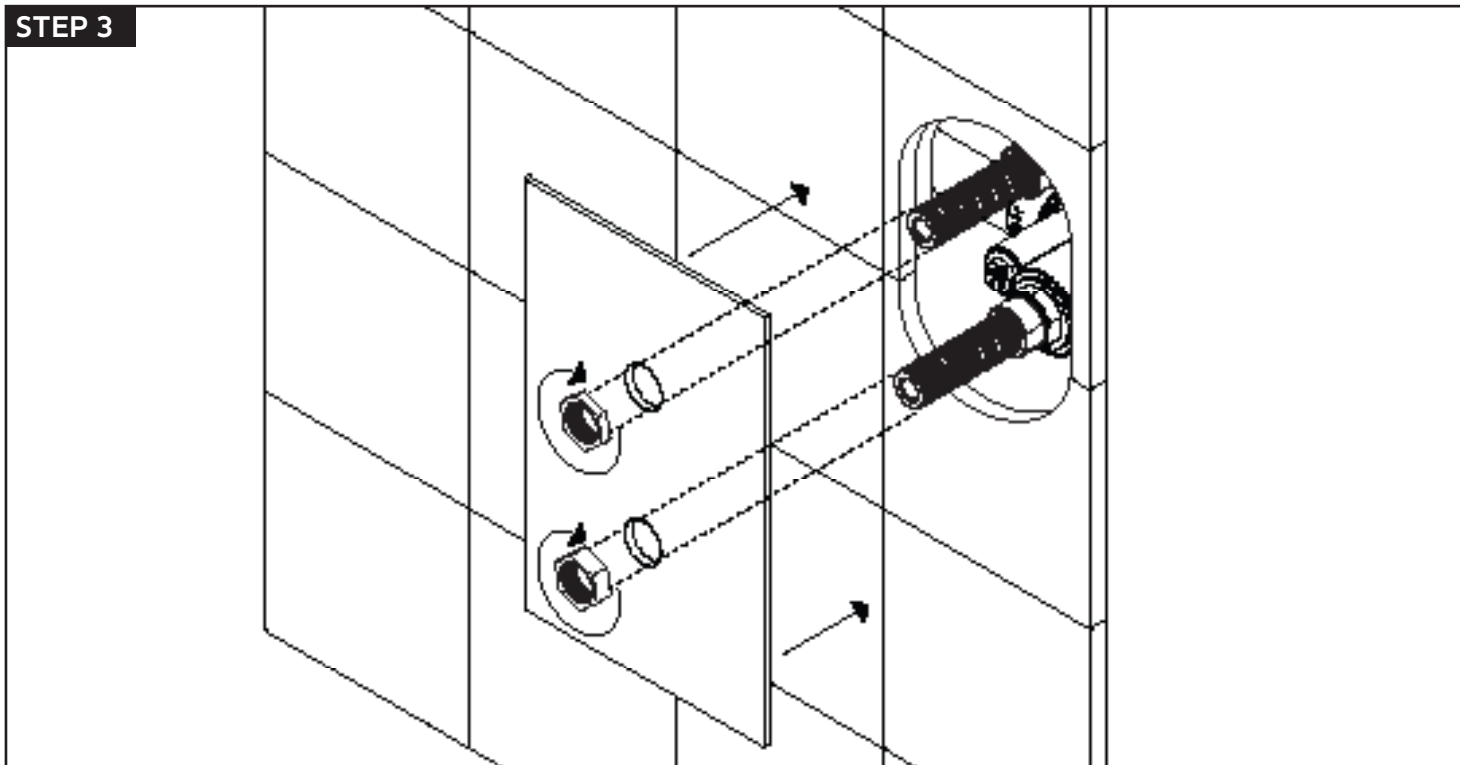


### STEP 4

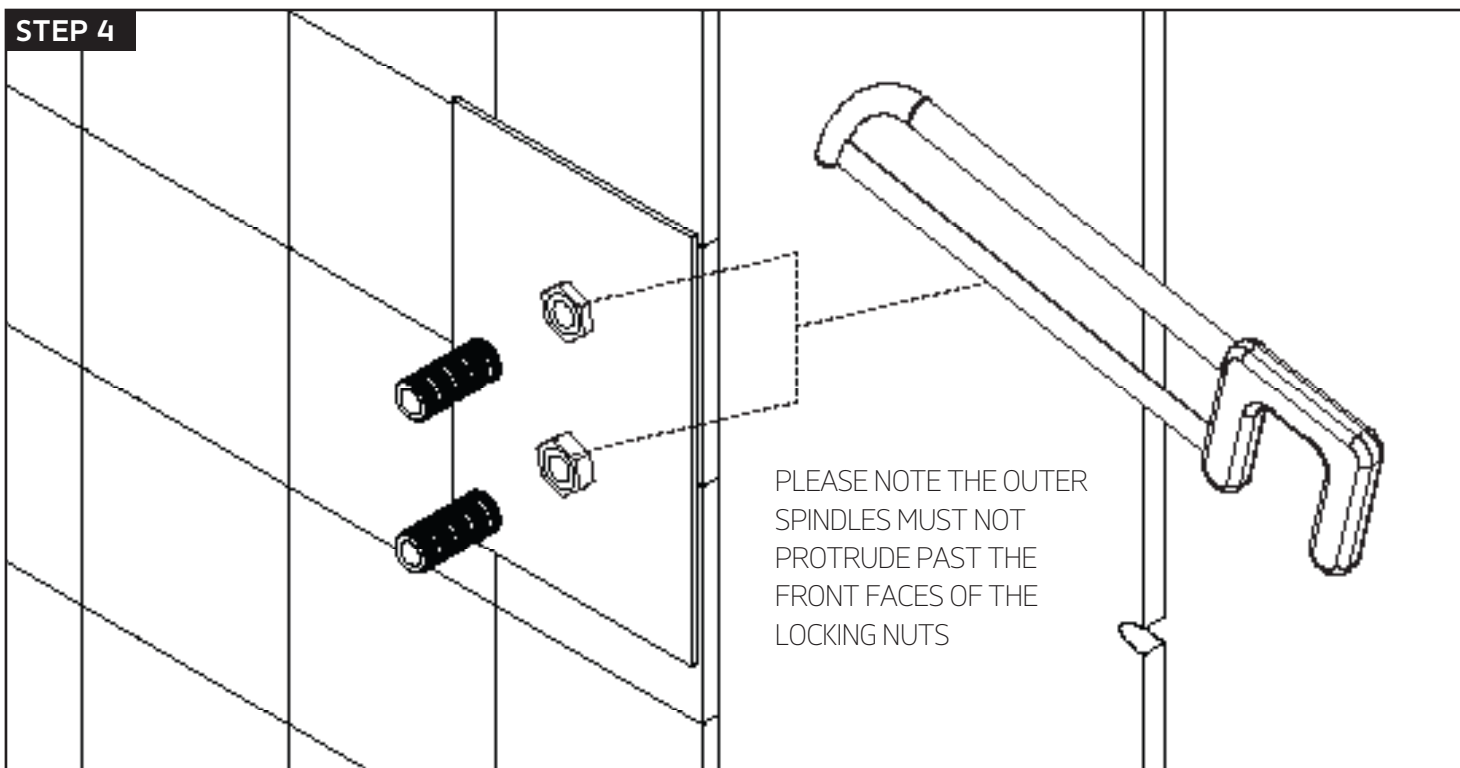




### STEP 5

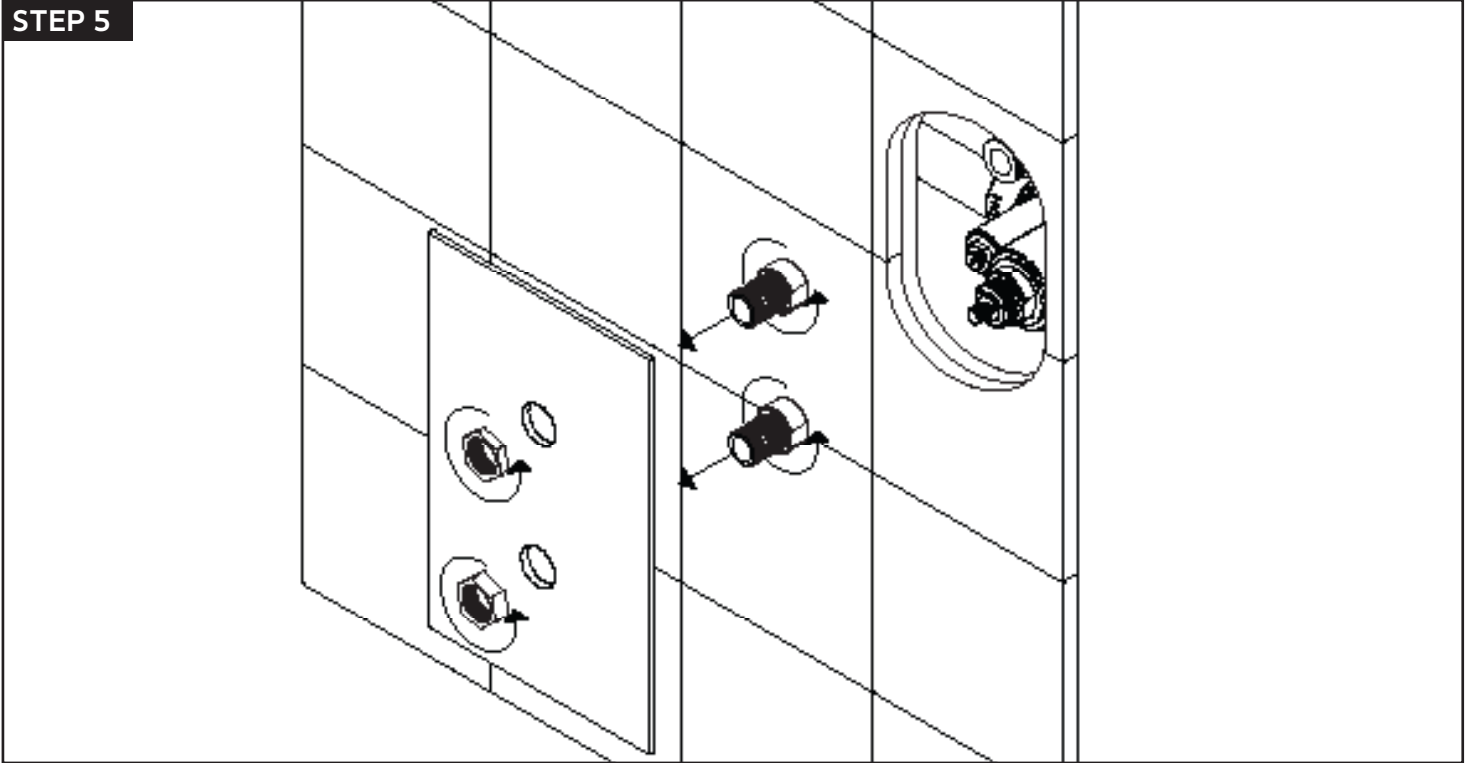


### STEP 6

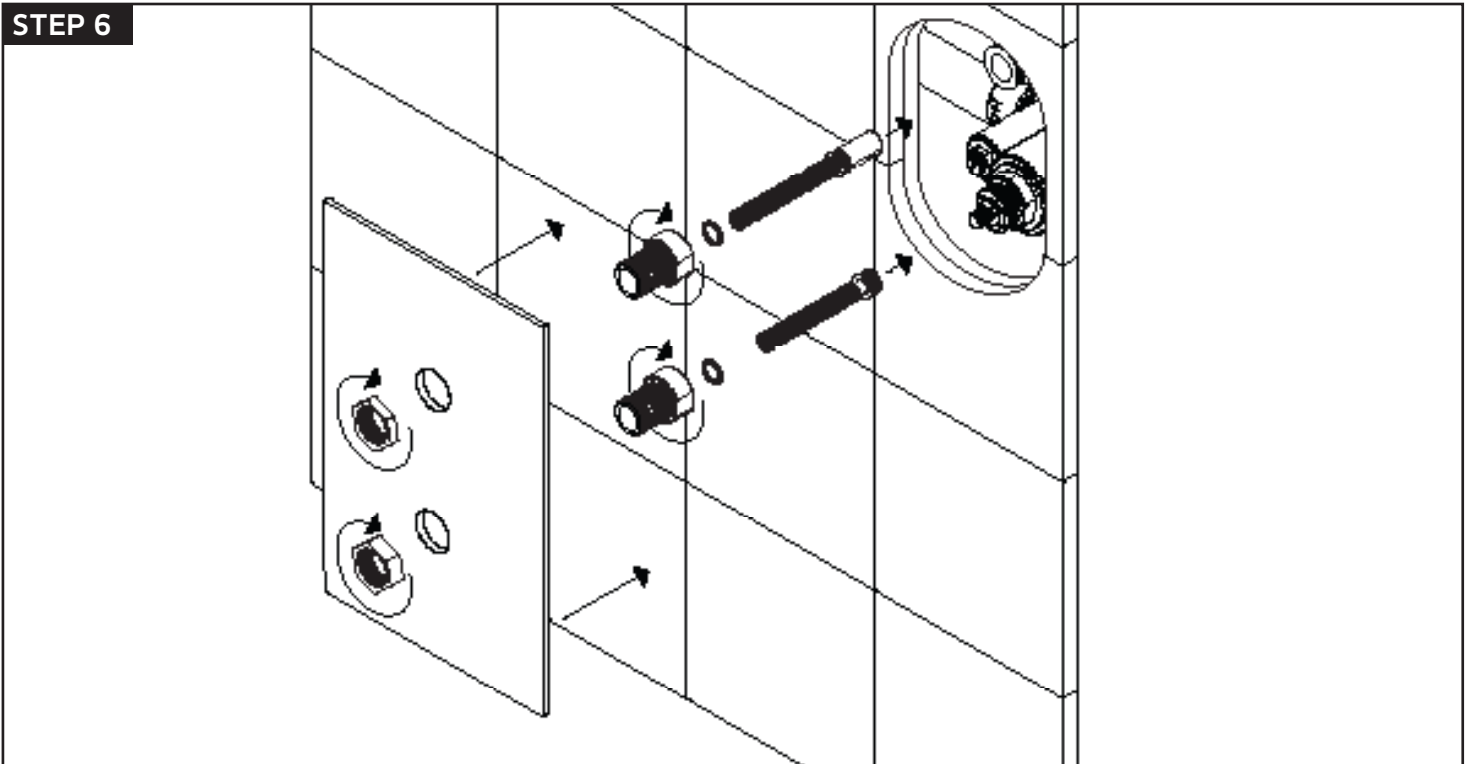


## INSTALLATION STEPS

for F903B-59TK


### STEP 7

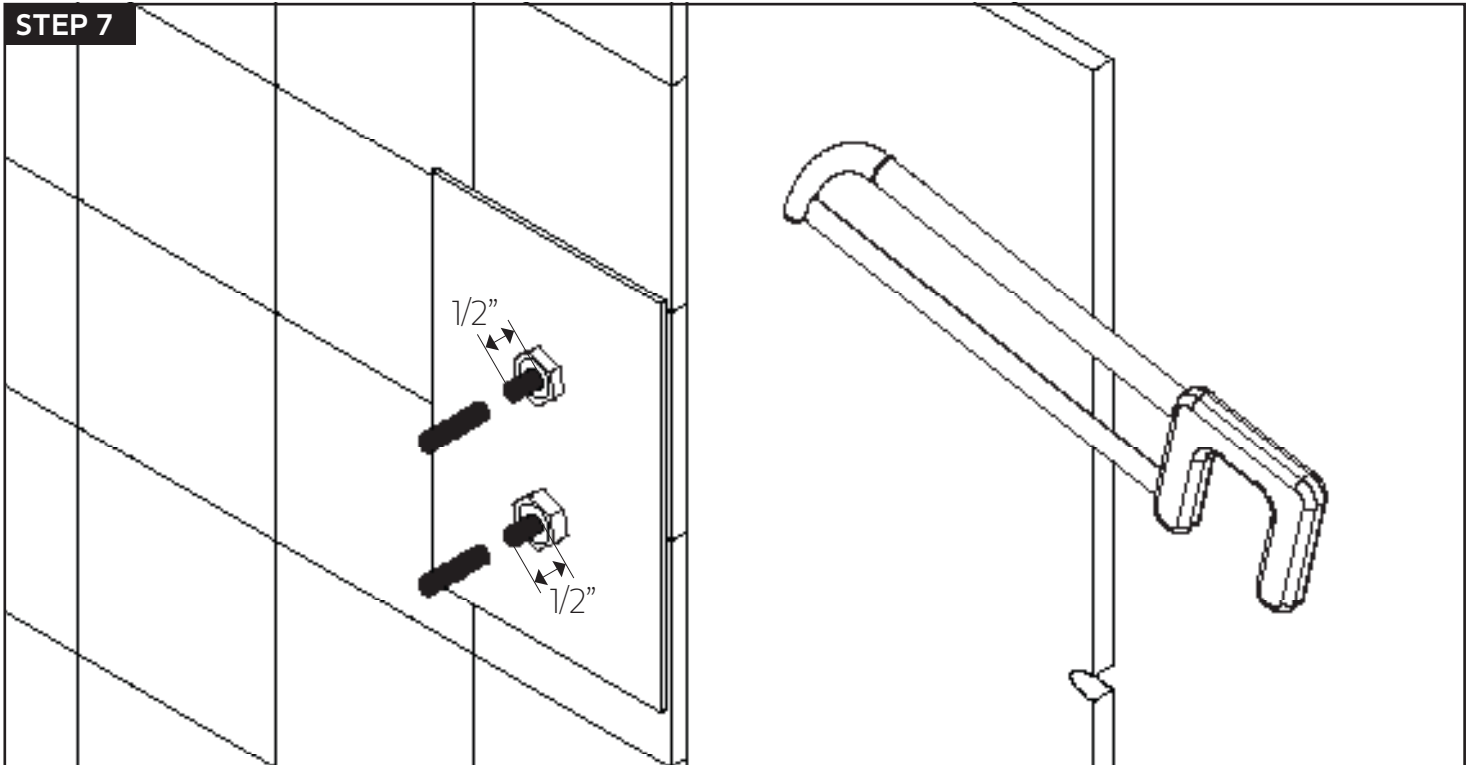


### STEP 8

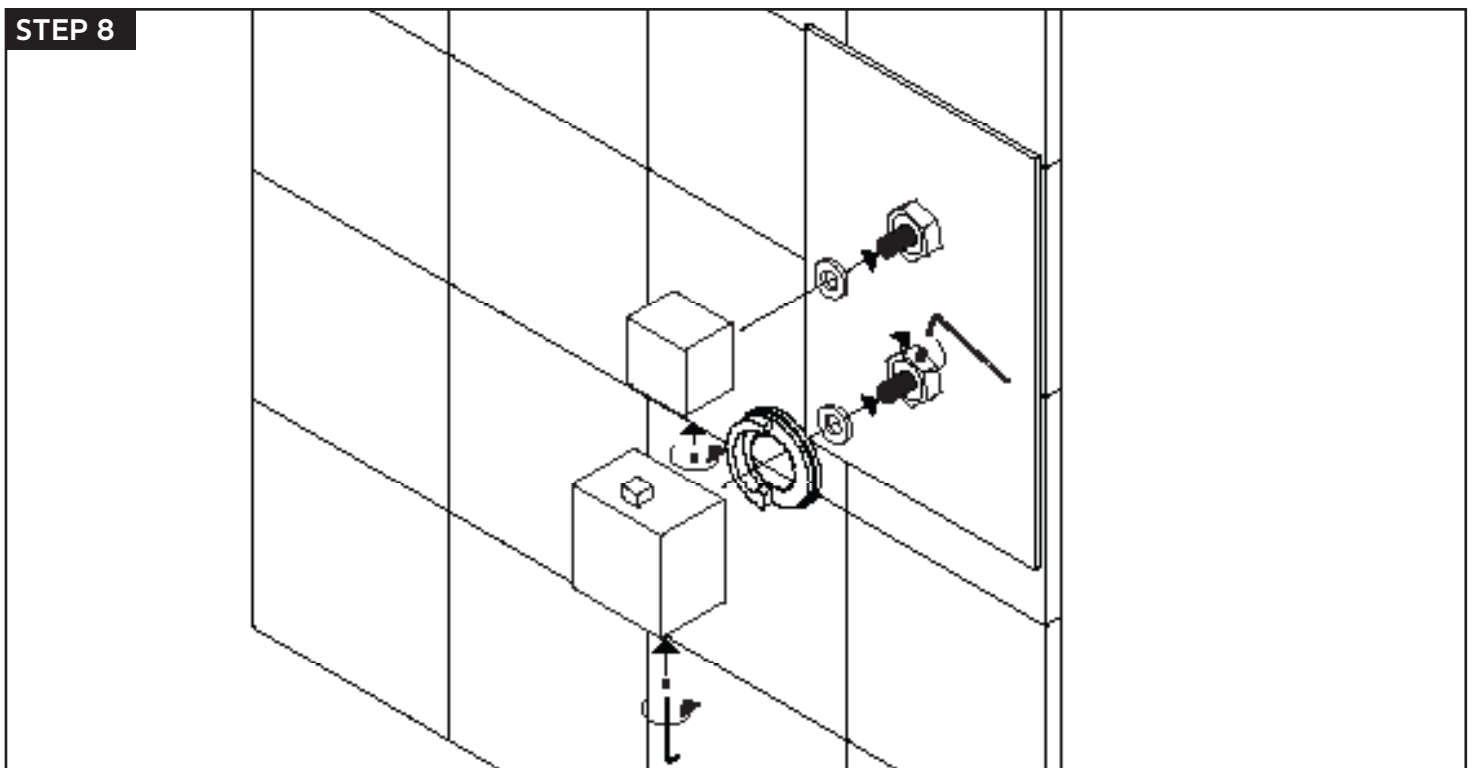


### STEP 1

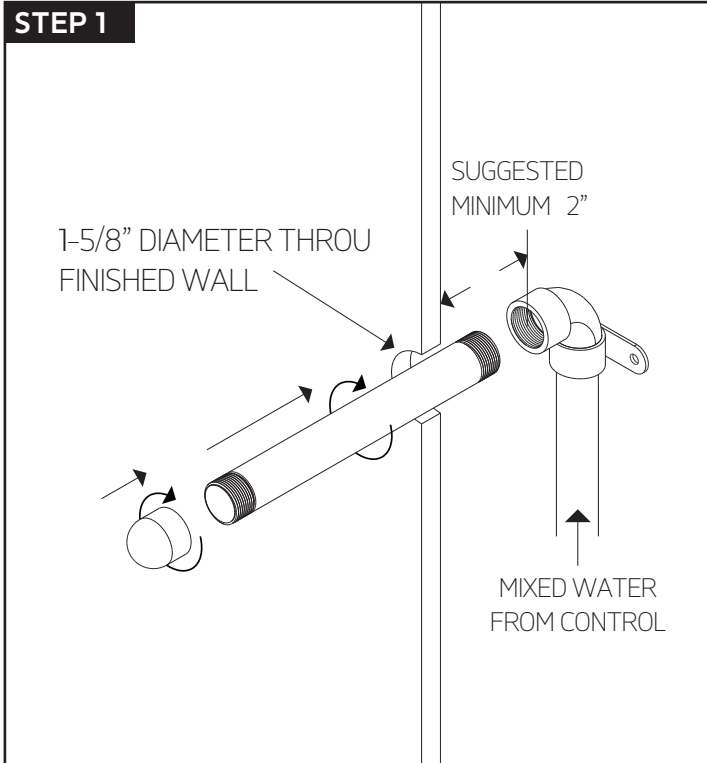


### STEP 2

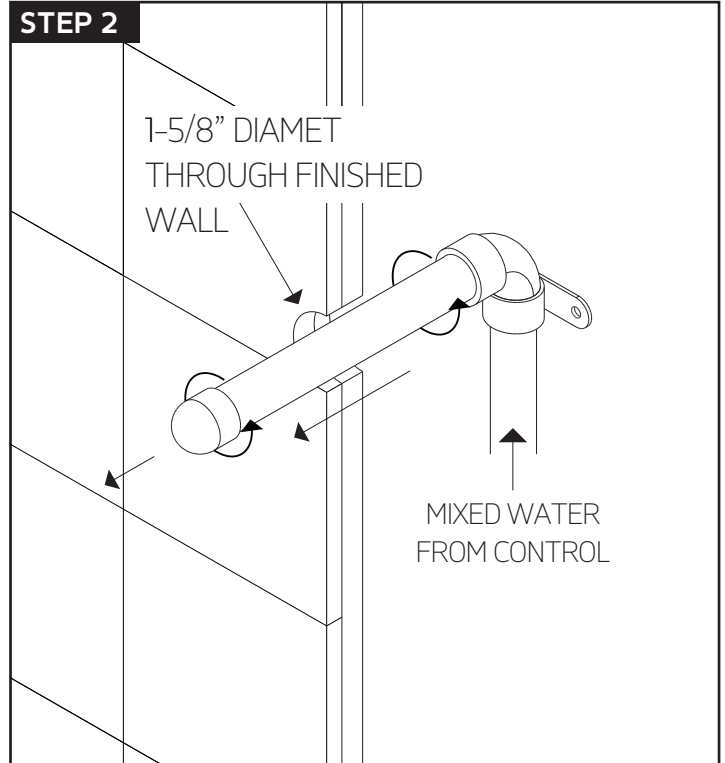


### STEP 3

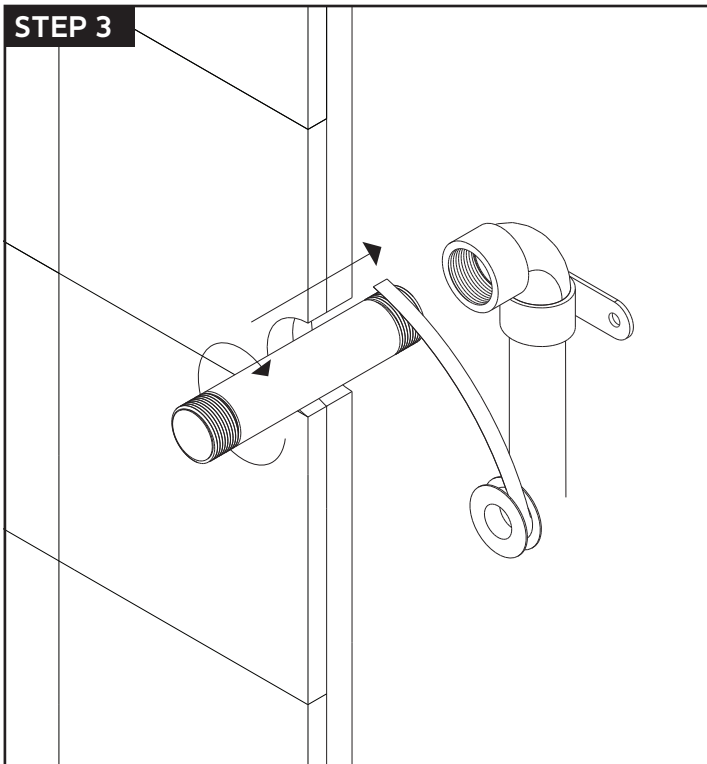


### STEP 4

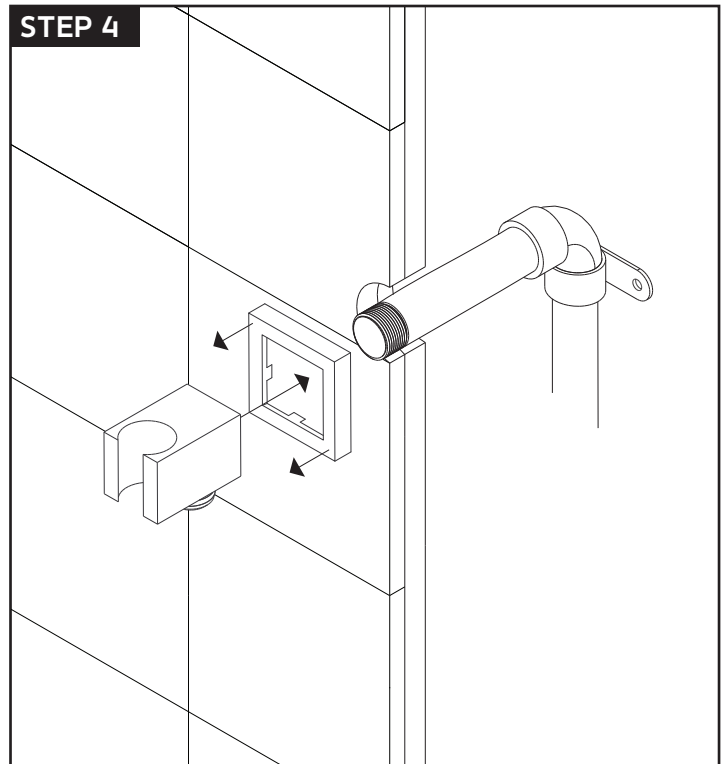


### STEP 5

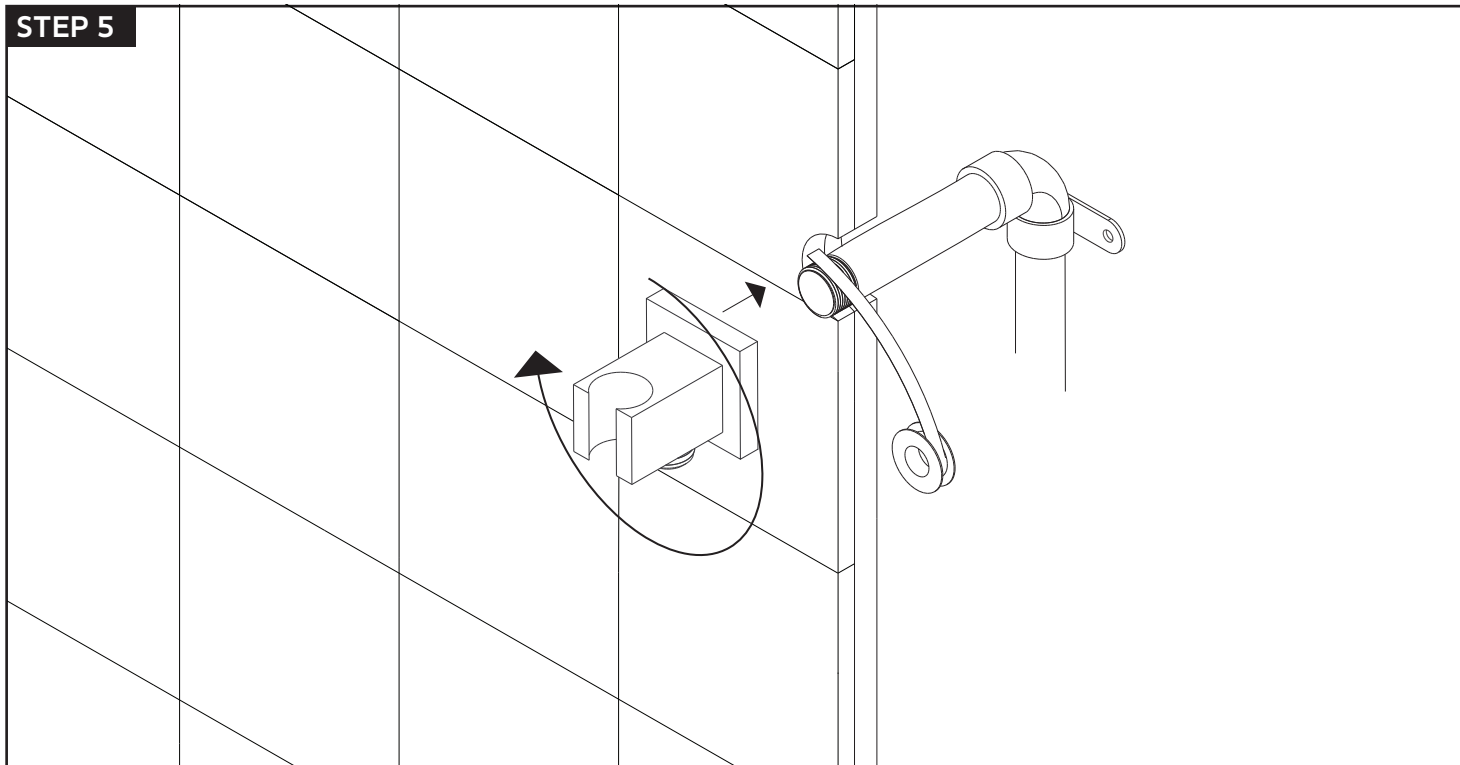

### STEP 6

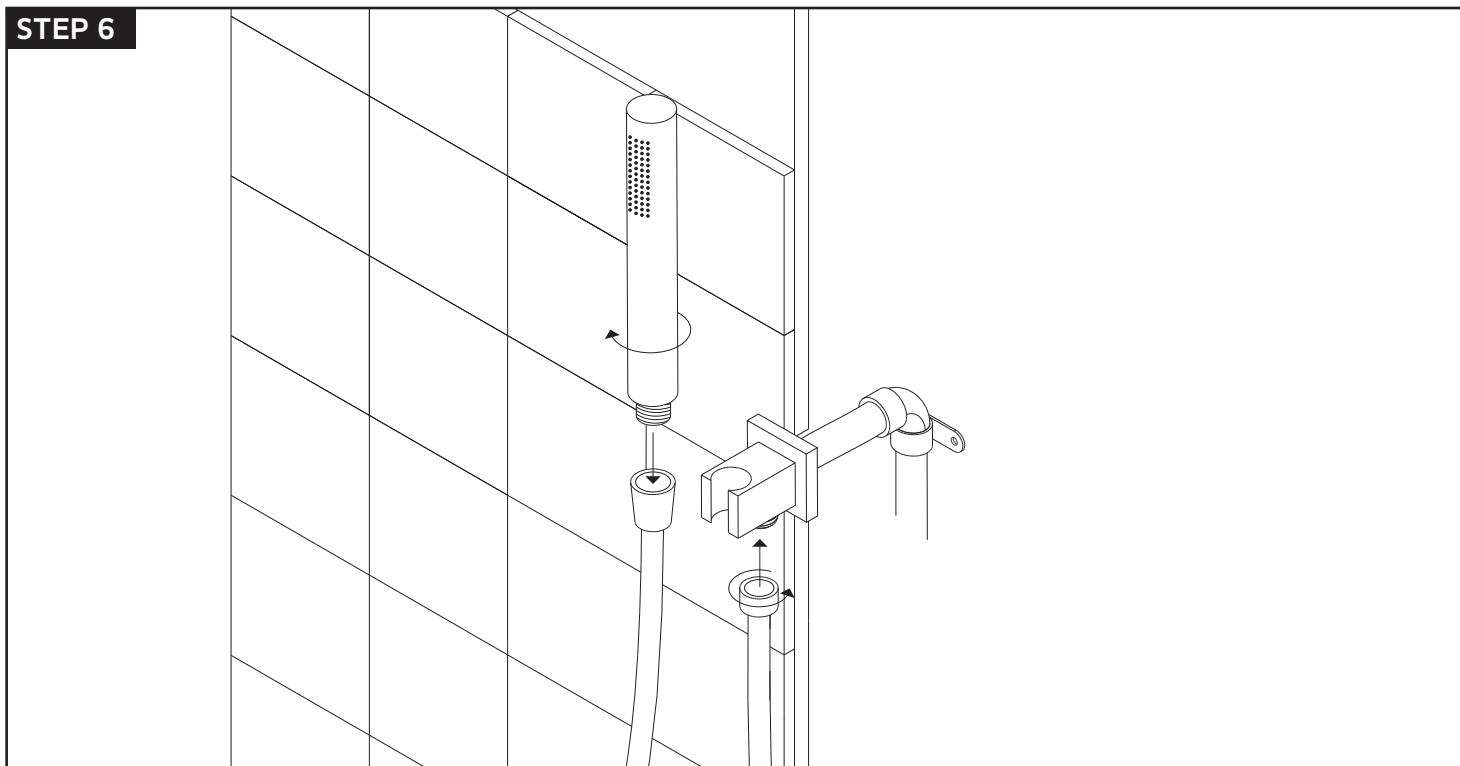

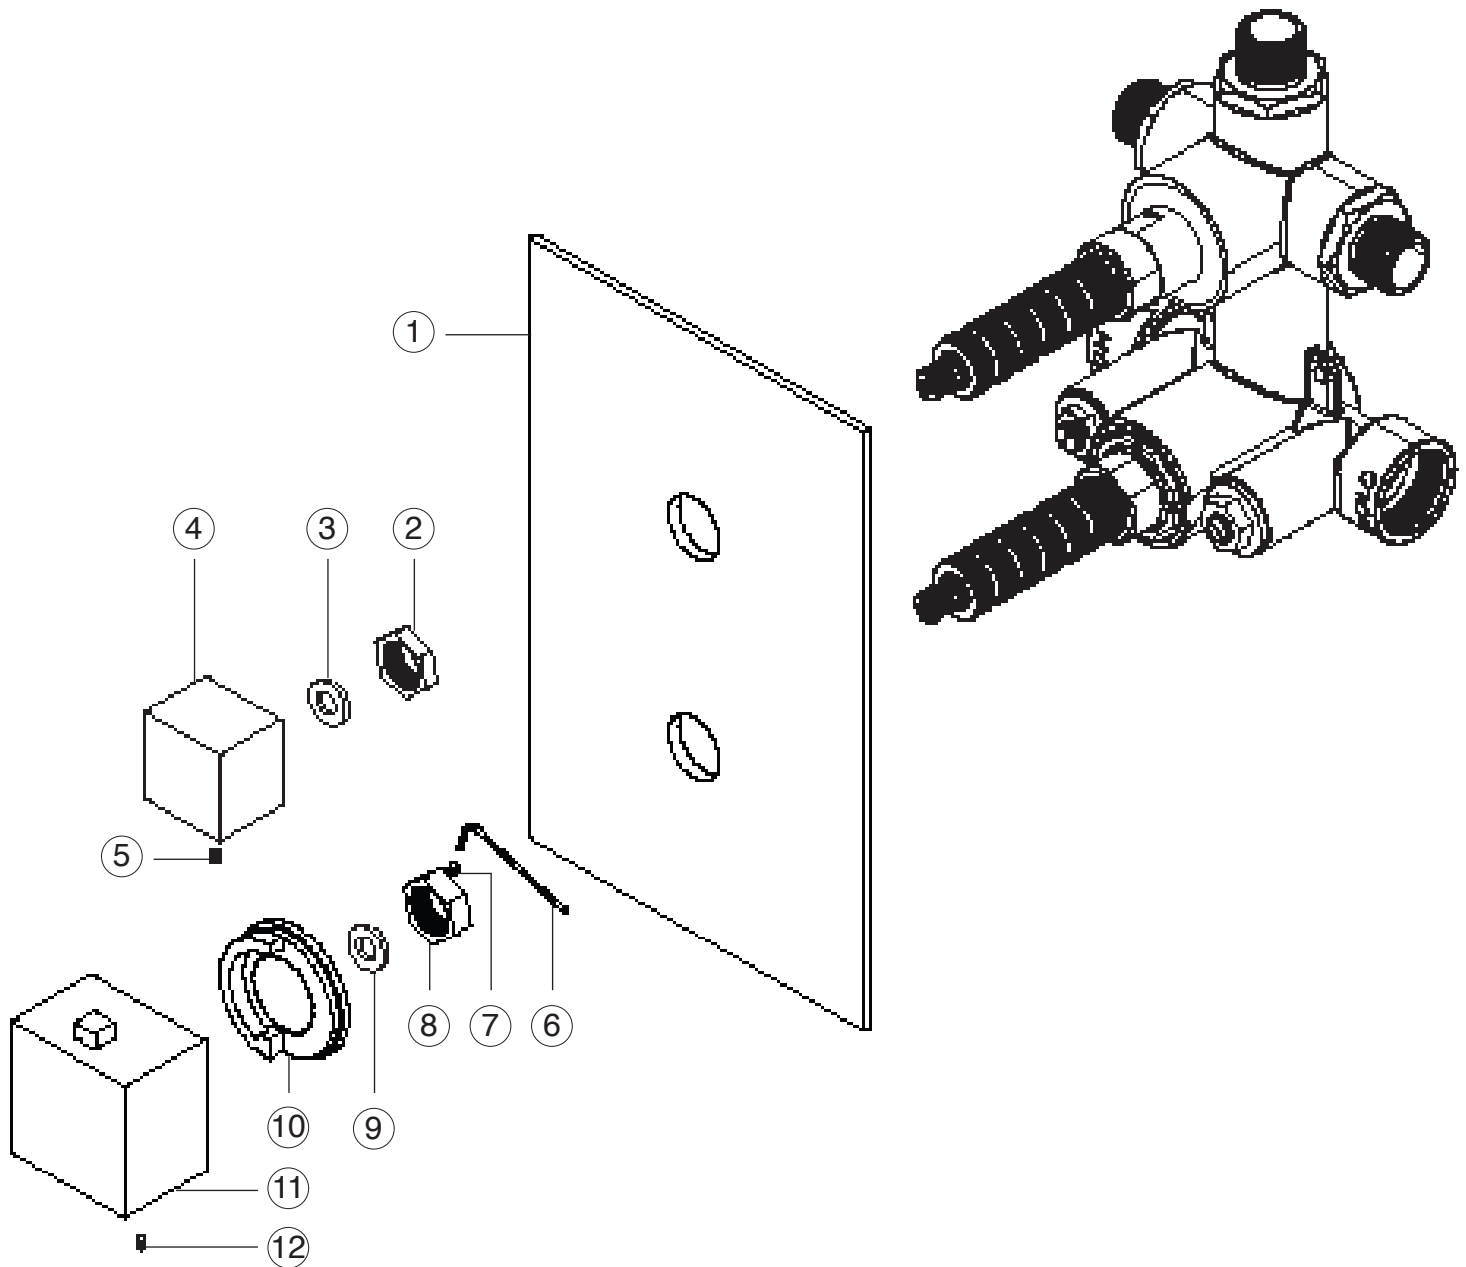


- |   |  |
|---|--|
| ① <b>ESCUTCHEON</b> F903B-59TK XP1            | ⑧ <b>THERMOSTAT LOCKING NUT</b> F903B-59TK XP8     |
| ② <b>DIVERTER LOCKING NUT</b> F903B-59TK XP2  | ⑨ <b>NYLON WASHER</b> F903B-59TK XP9               |
| ③ <b>NYLON WASHER</b> F903B-59TK XP3          | ⑩ <b>TEMPERATURE LIMITING RING</b> F903B-59TK XP10 |
| ④ <b>DIVERTER HANDLE</b> F903B-59TK XP4       | ⑪ <b>THERMOSTAT HANDLE</b> F903B-59TK XP11         |
| ⑤ <b>DIVERTER SET SCREW</b> F903B-59TK XP5    | ⑫ <b>THERMOSTAT SET SCREW</b> F903B-59TK XP12      |
| ⑥ <b>ALLEN WRENCH</b> F903B-59TK XP6          |  |
| ⑦ <b>LOCKING NUT SET SCREW</b> F903B-59TK XP7 |  |

# artos<sup>®</sup>

PS109

## PARTS BREAKDOWN

premier series shower set

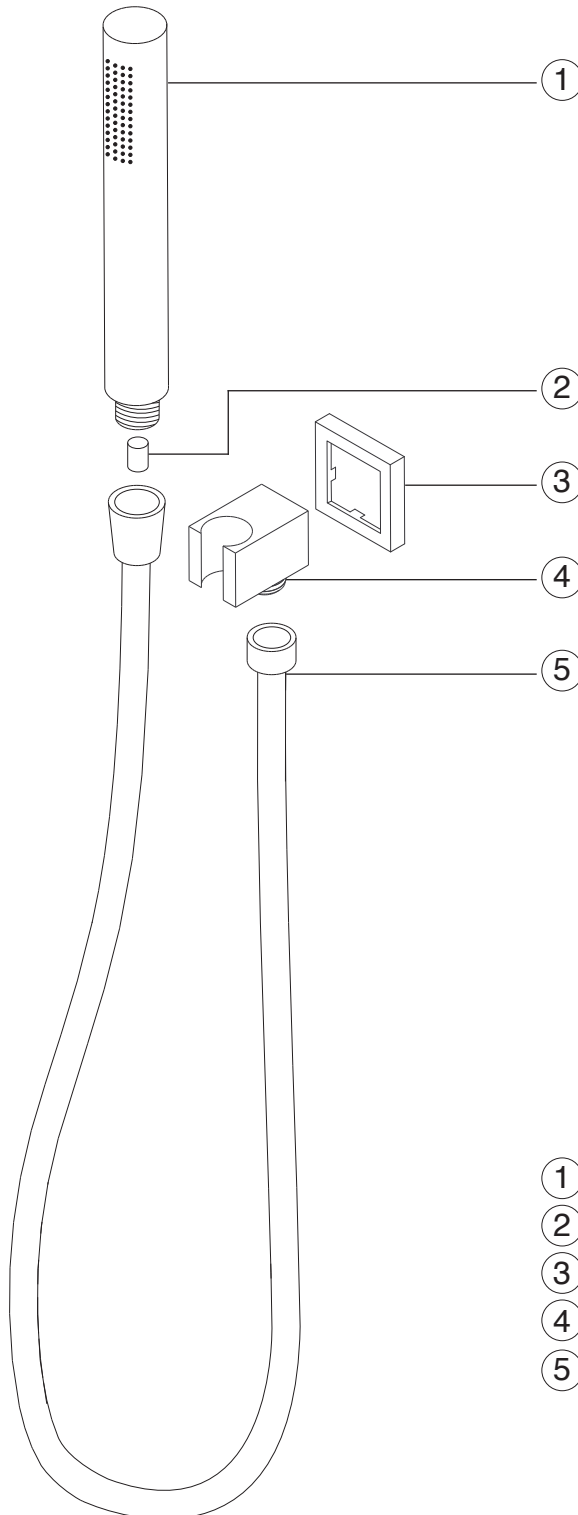

- ① HAND SHOWER
- ② HAND SHOWER CHECK VALVE
- ③ ESCUTCHEON PLATE
- ④ SHOWER OUTLET ELBOW AND HOLDER
- ⑤ TEKFLX SHOWER HOSE



PS109

premier series shower set

## CARE & MAINTENANCE

For best results, keep the following in mind to retain the high quality finish of your artos® shower kit:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

## LIMITED LIFETIME WARRANTY

artos® shower kits are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

ITEM NO. **PS109**