

artos®

PS114

INSTALLATION GUIDE

premier series shower set

BRUSHED NICKEL(PS119BN)



CHROME(PS119CH)



artos[®]

PS114

premier series shower set

OPERATING SPECIFICATIONS

FEATURES

Solid Brass
3-Outlets

INCLUDES

F903B-59TK
F907-46
F905-1
F702-3

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a pressure reducer


OPERATING TEMPERATURE



Maximum: 176°

FLOW CAPACITY

Hand Shower: 1.8 USGPM
Shower Head: 1.8 USGPM
Body Jet: 1.0 USGPM

APPROVAL

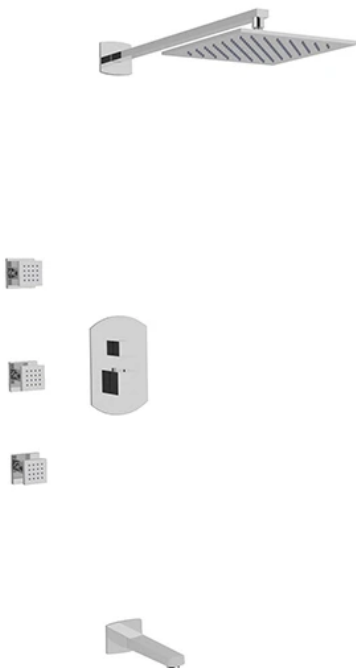

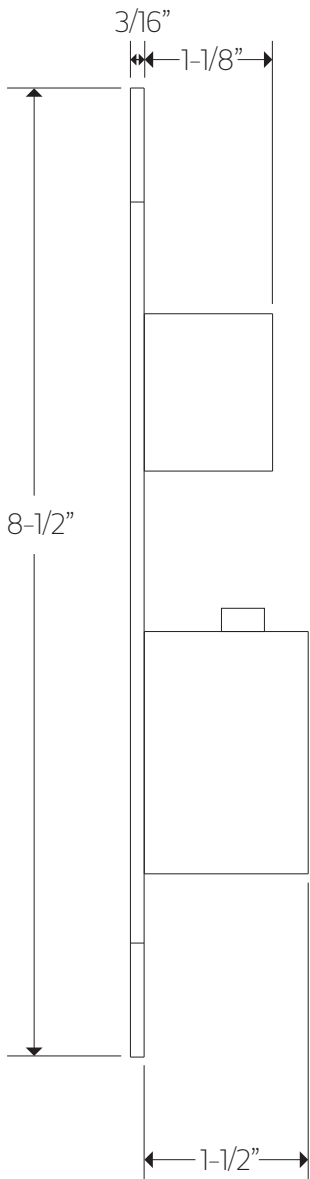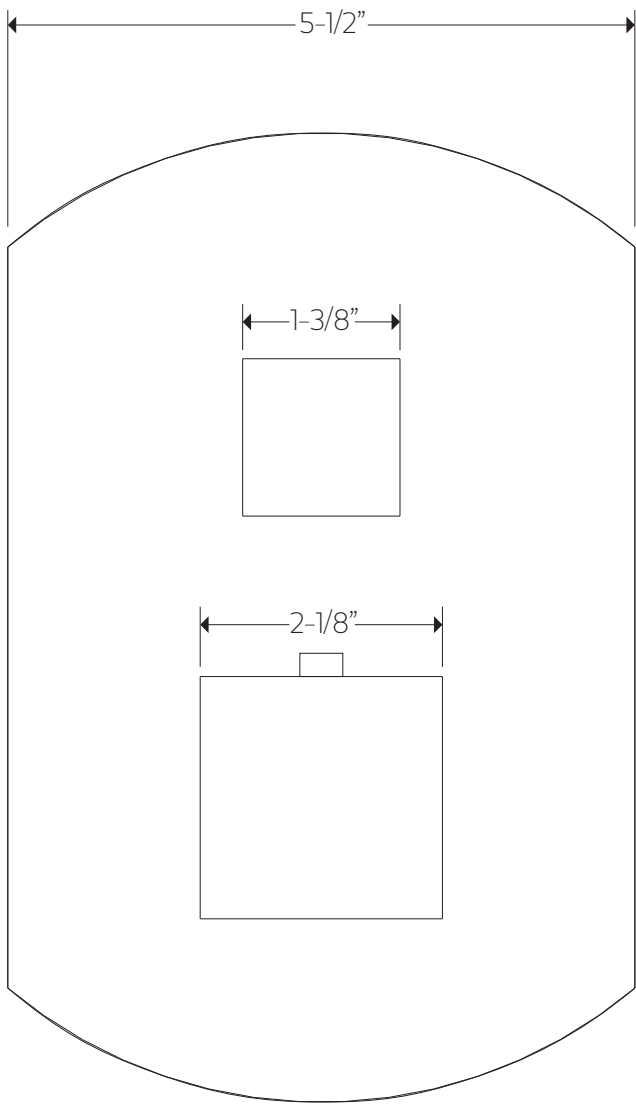


artos[®]

PS114



PRODUCT DIMENSIONS



premier series shower set

for F907-50

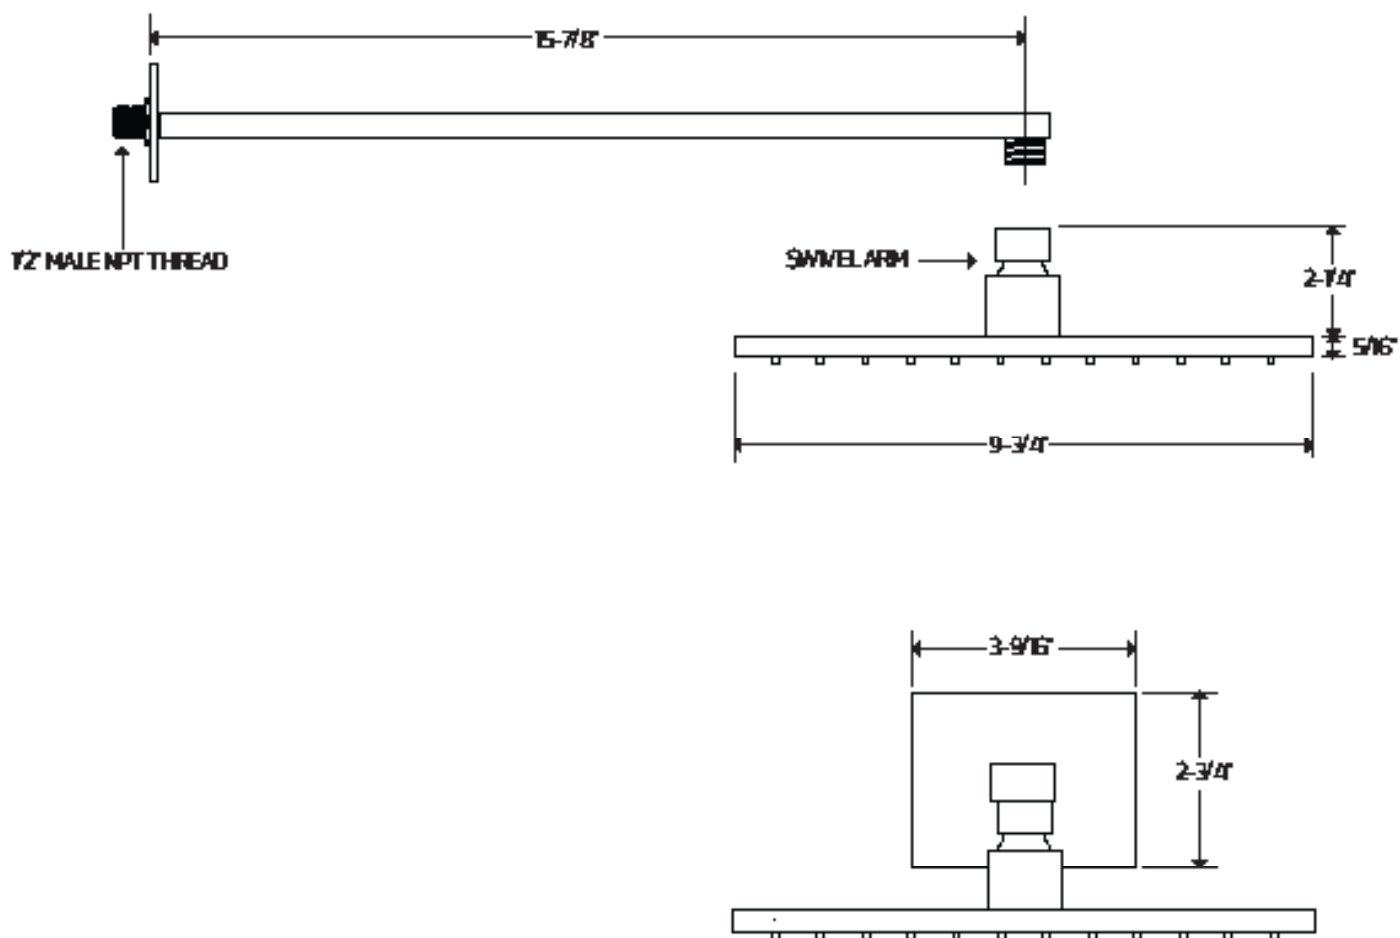


1/2" FEMALE
CONNECTIO
N

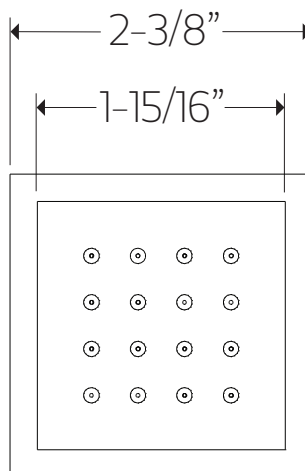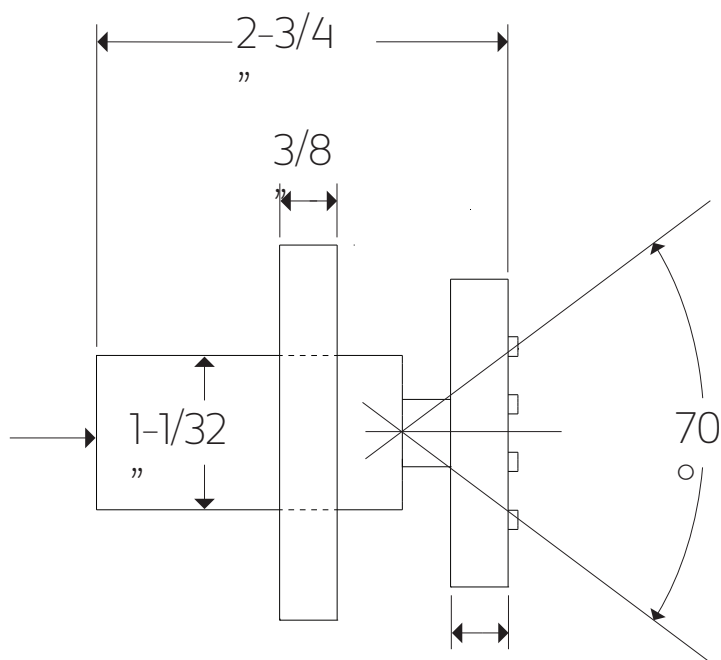


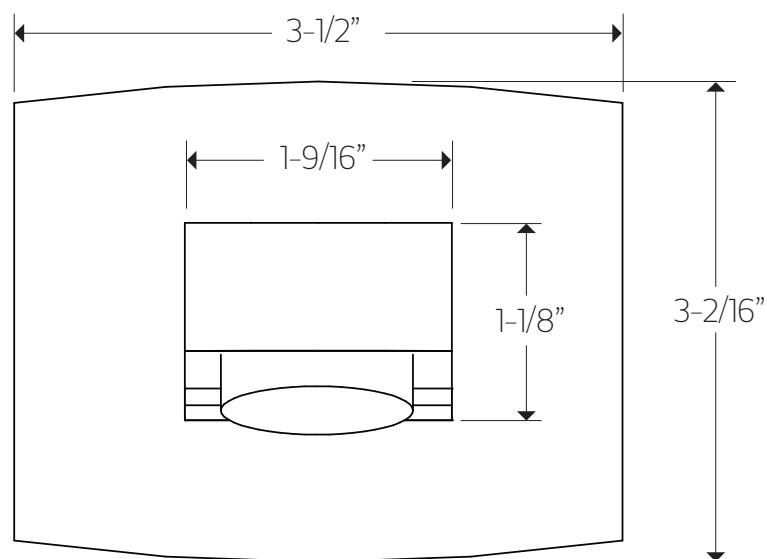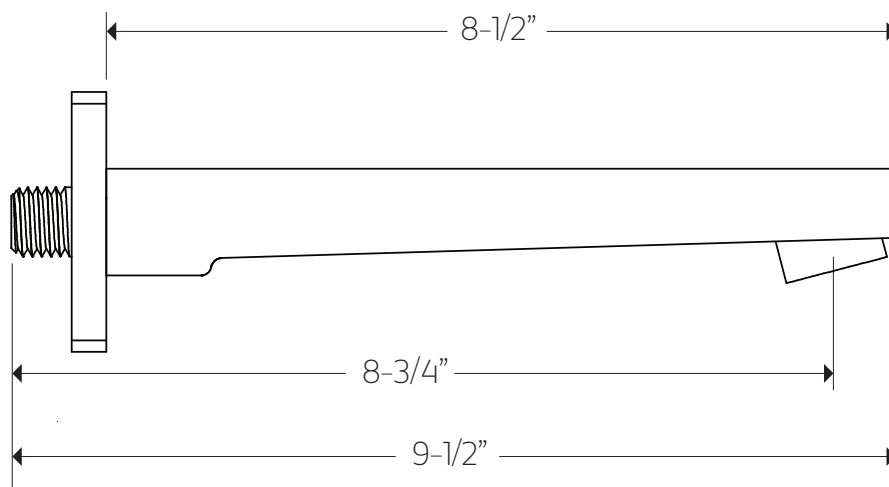


STEP 1

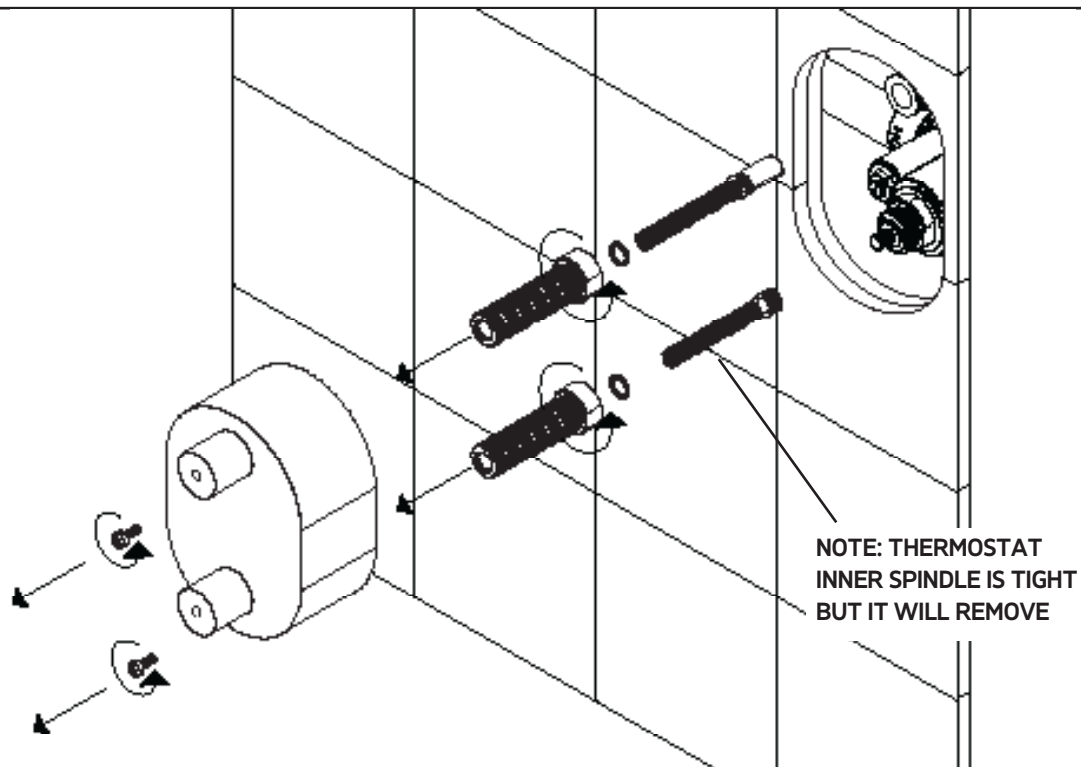


STEP 2

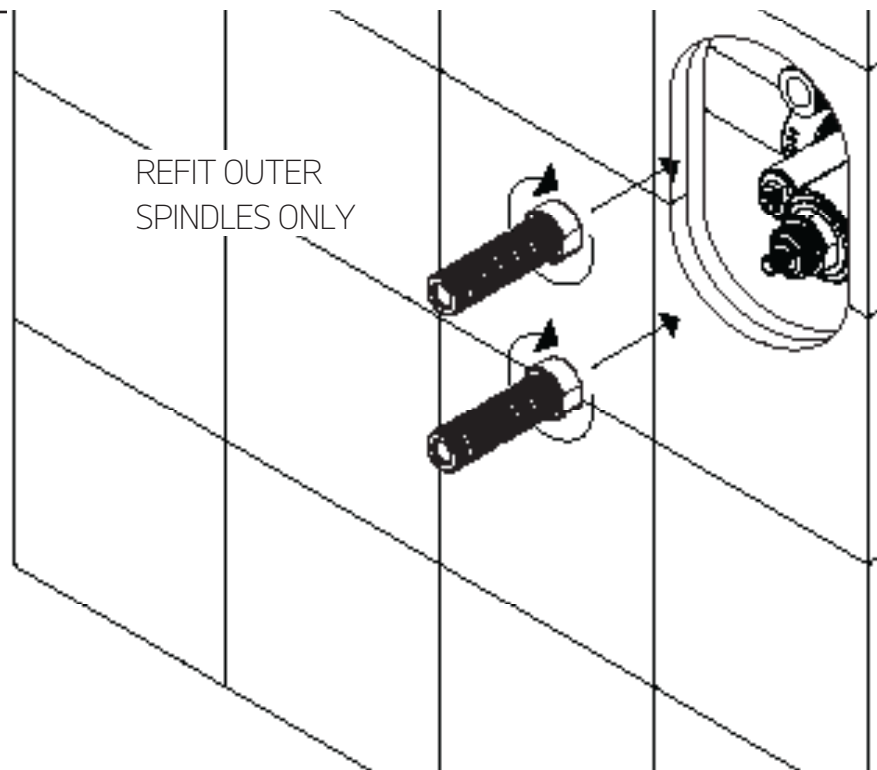

STEP 3

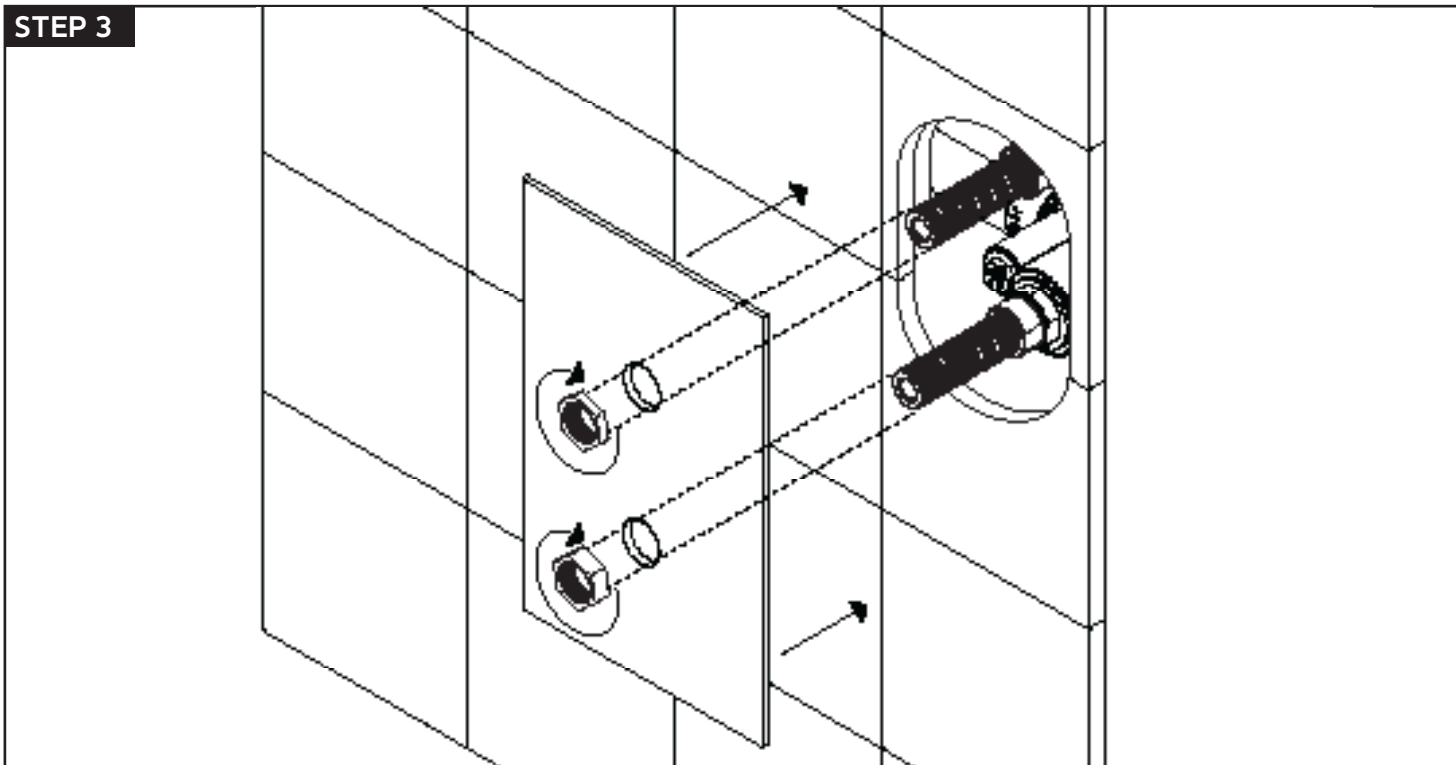


STEP 4

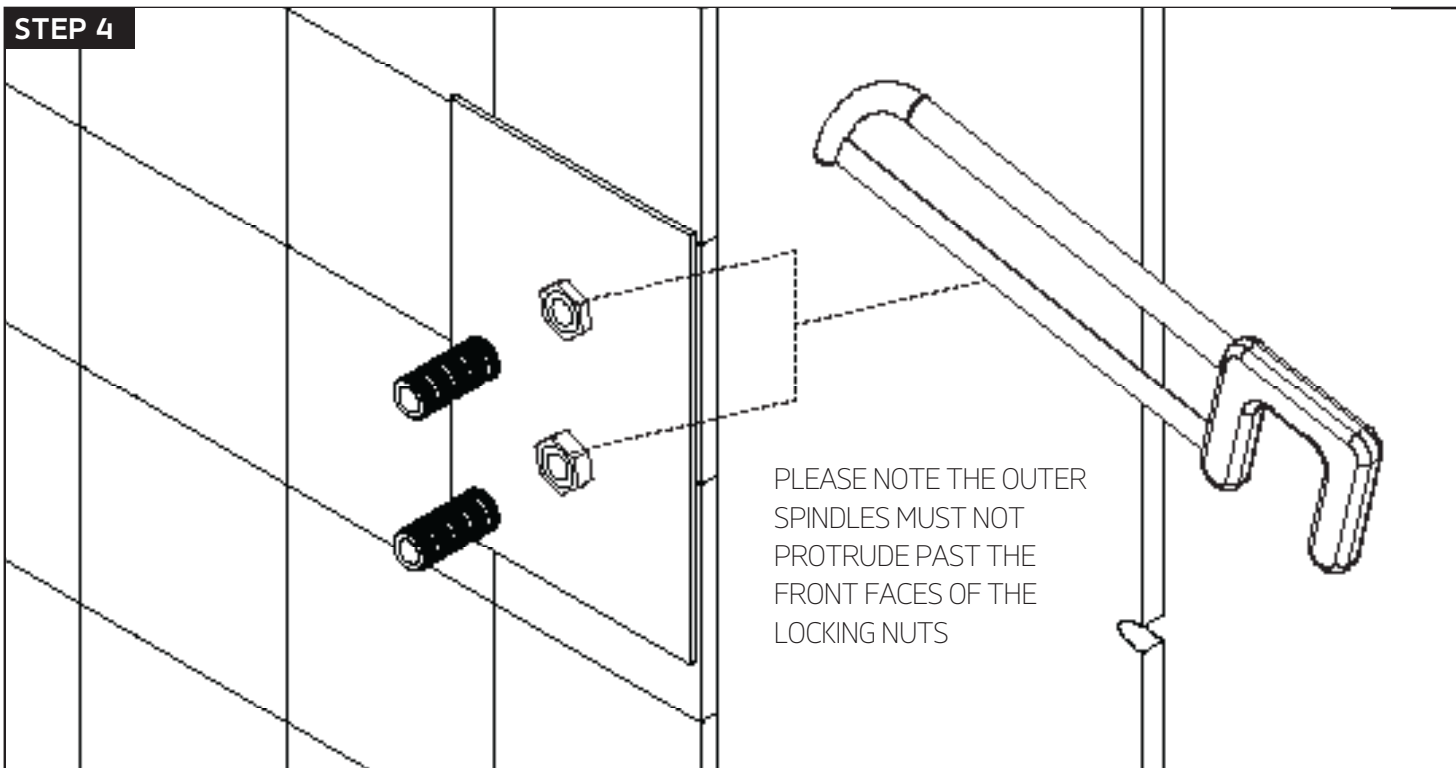


INSTALLATION STEPS

for F903B-59TK


STEP 5

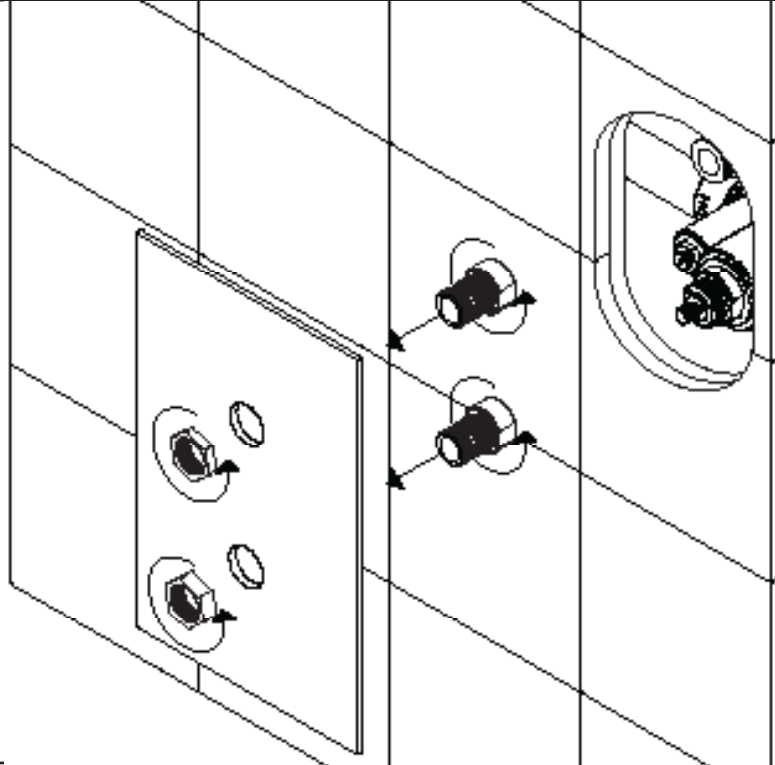


STEP 6



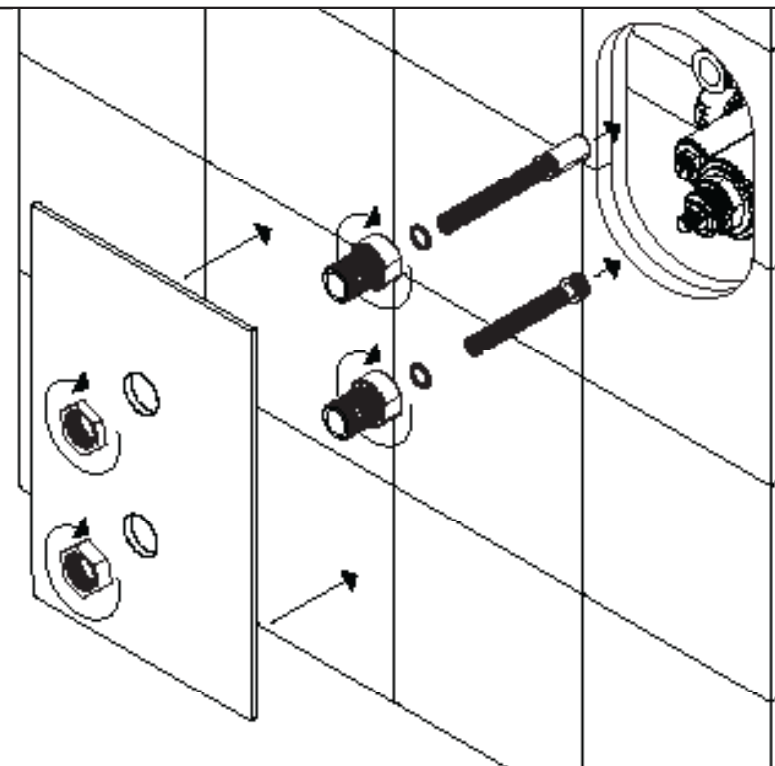


STEP 7

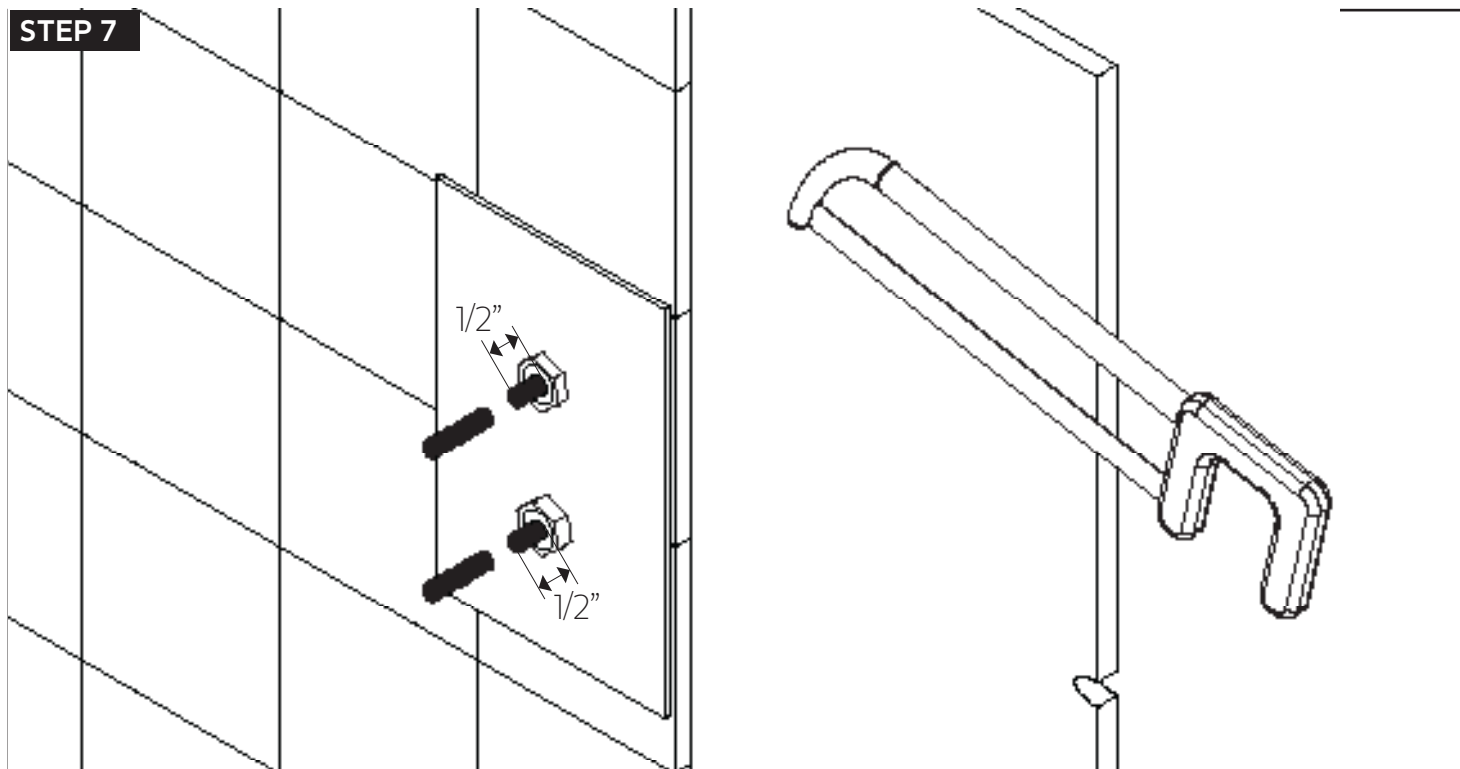

STEP 8


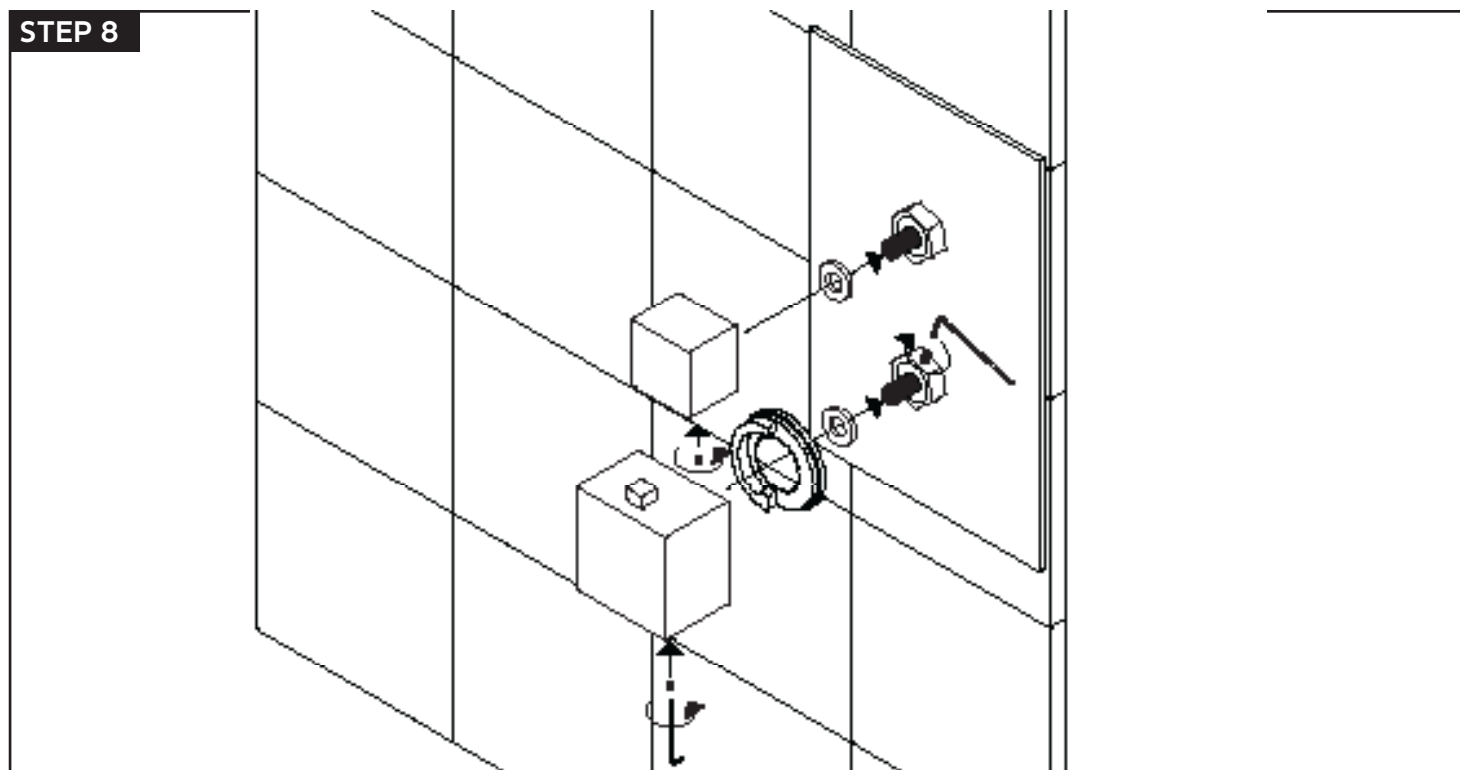


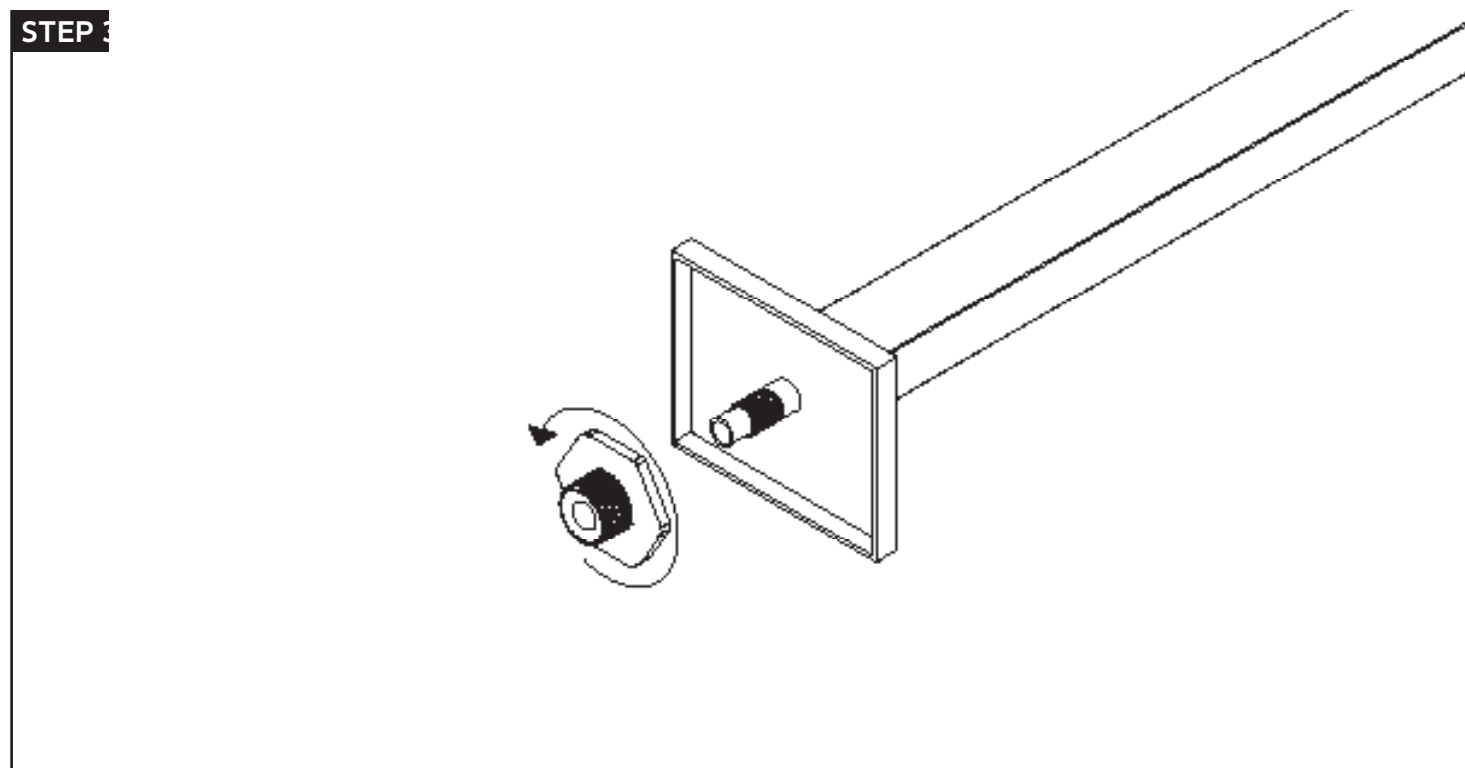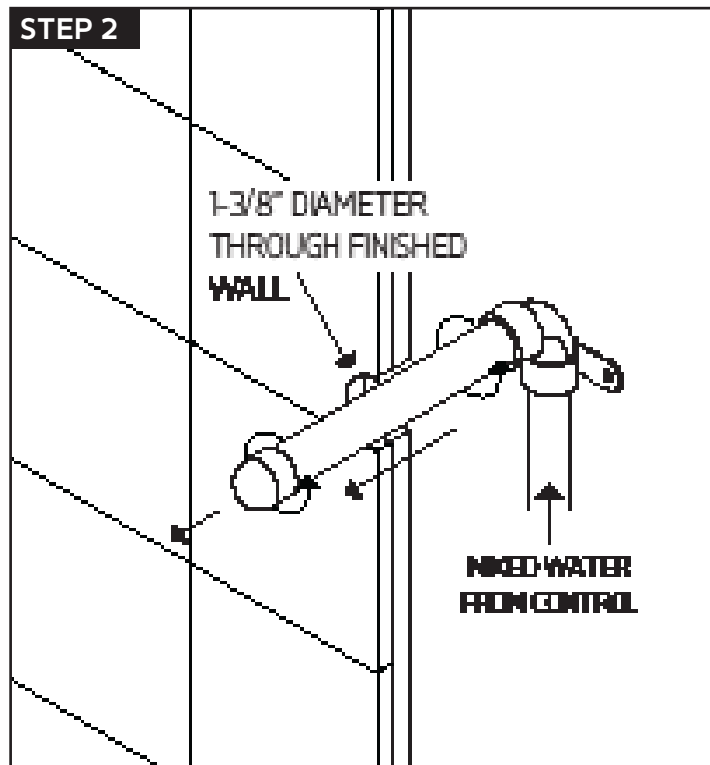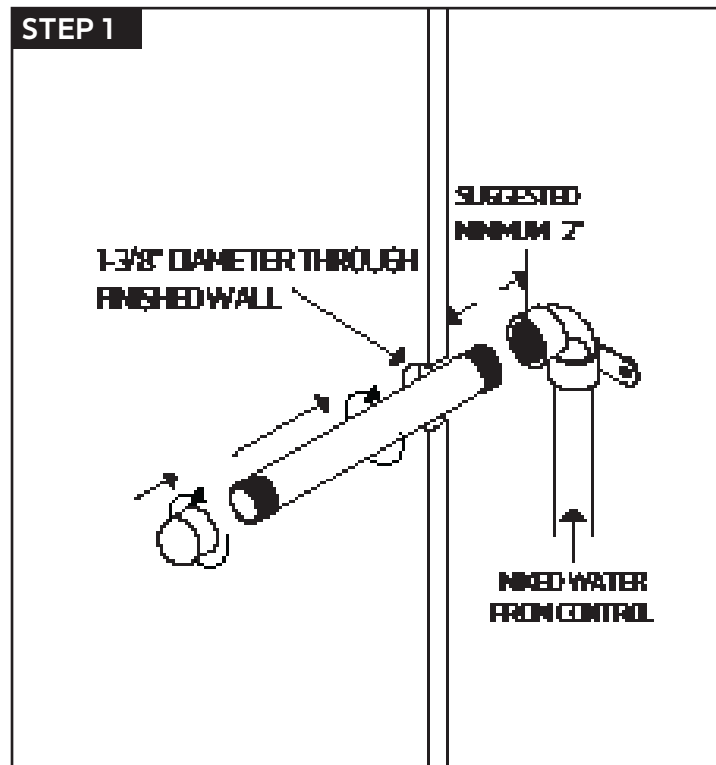


artos[®]

PS114


premier series shower set

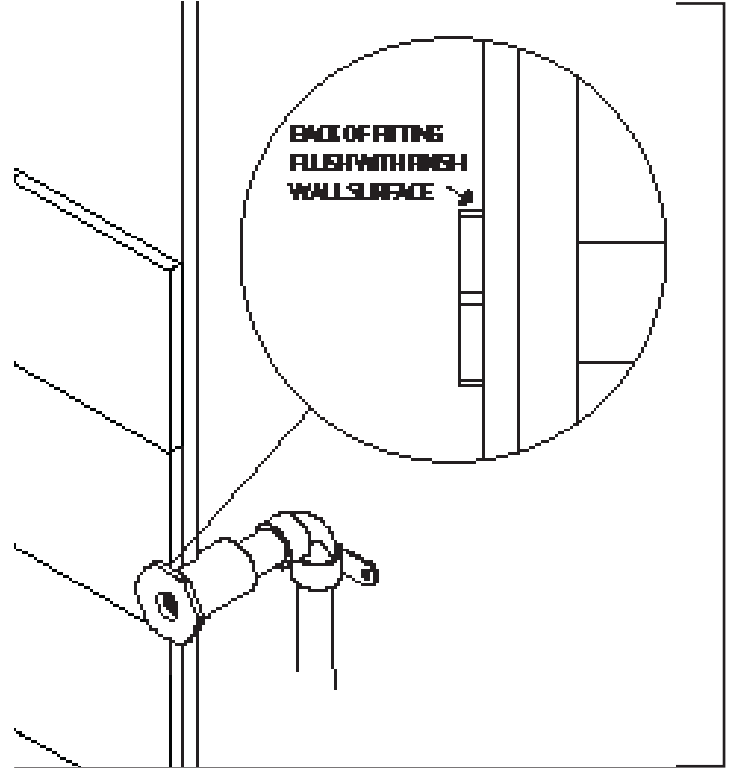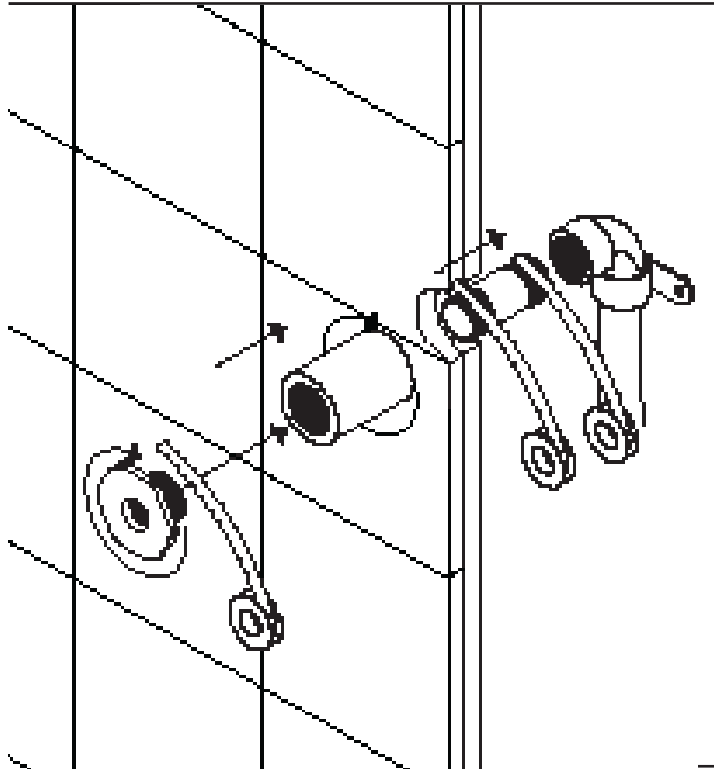


STEP 6

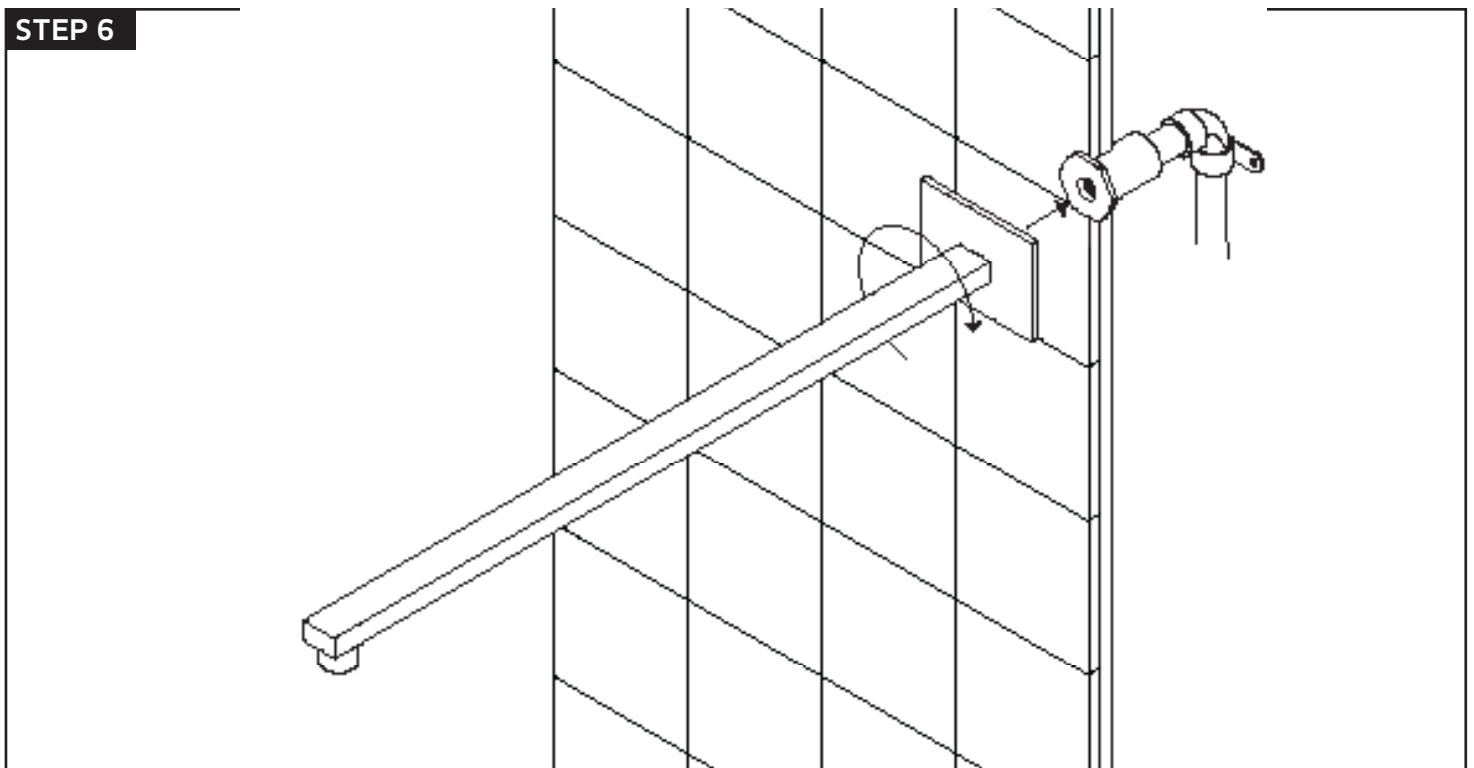


STEP 7

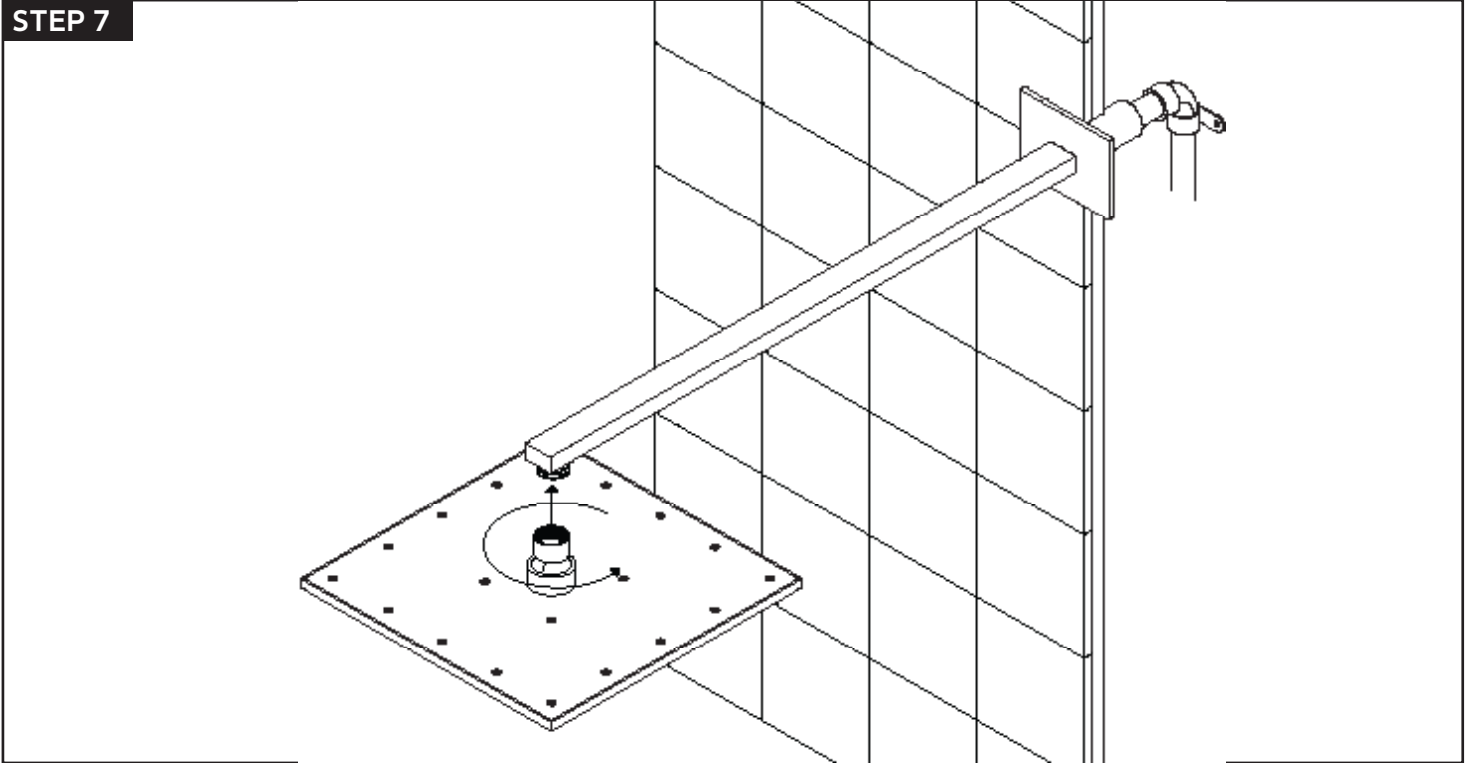


STEP 1

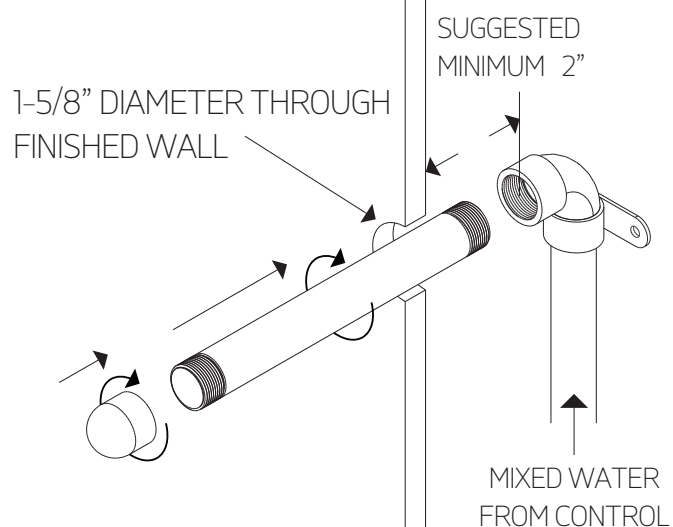

STEP 2

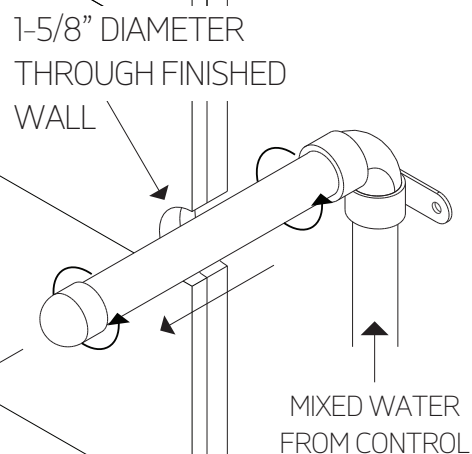


STEP 3

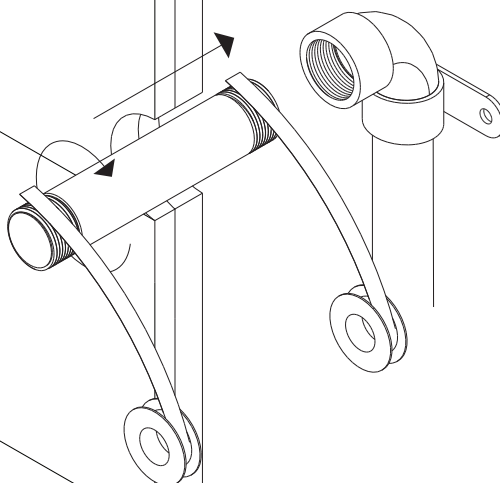


INSTALLATION STEPS

for F905-1


STEP 4

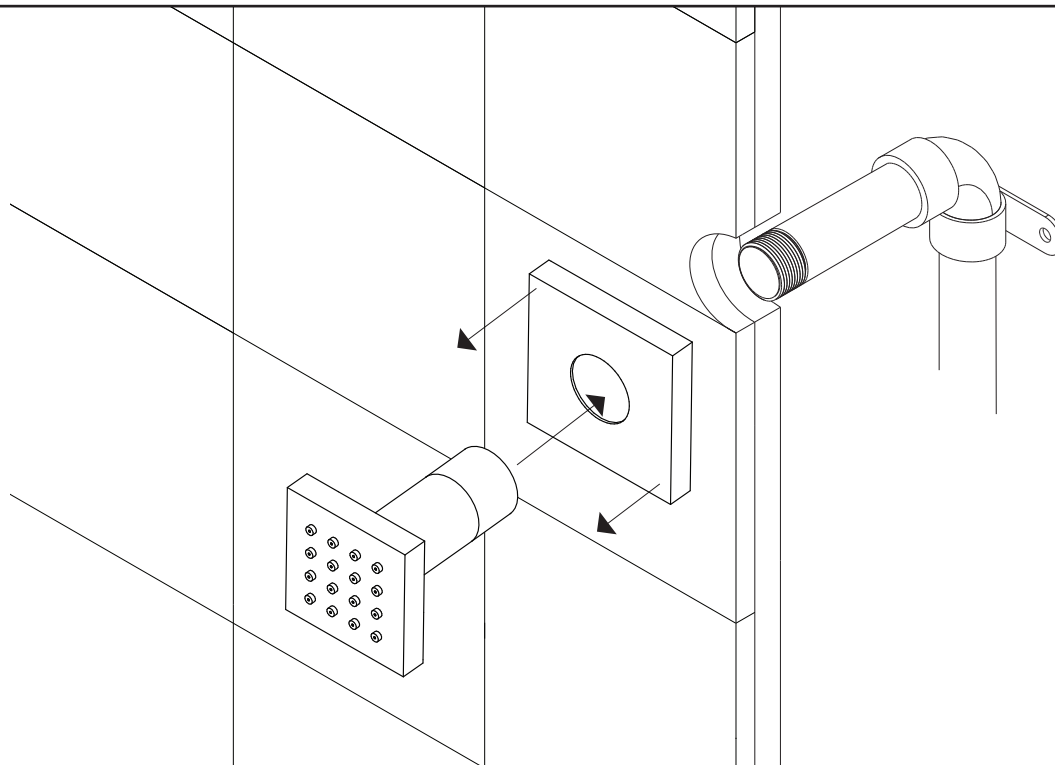

STEP 5

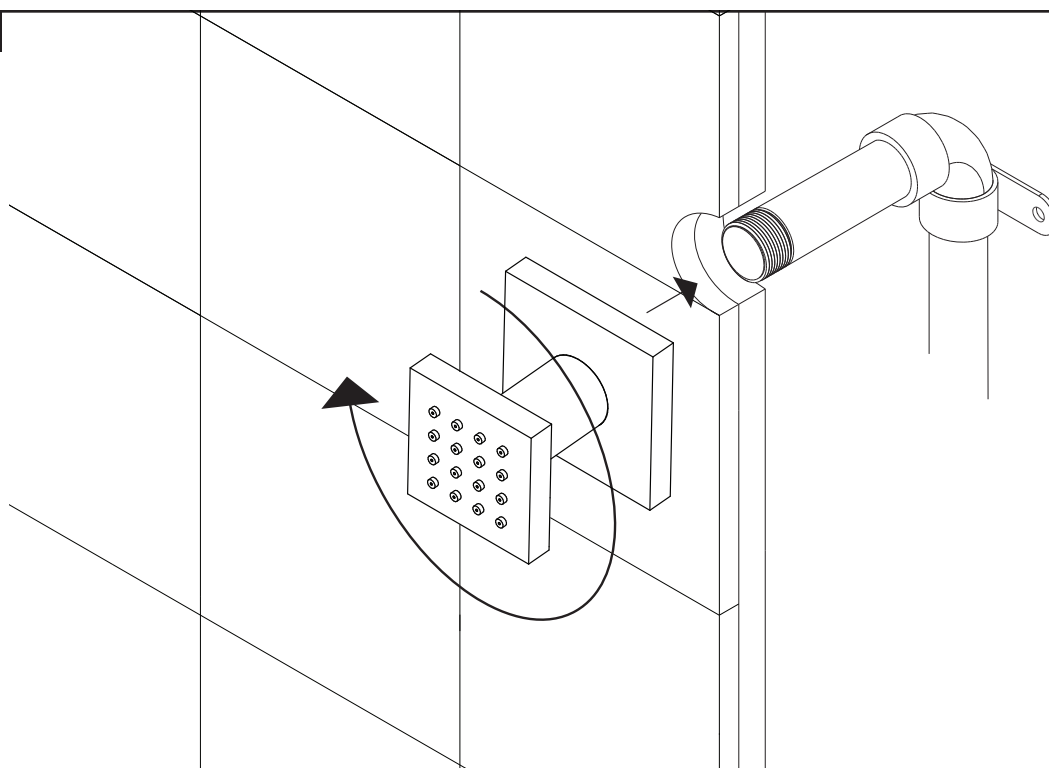


STEP 1

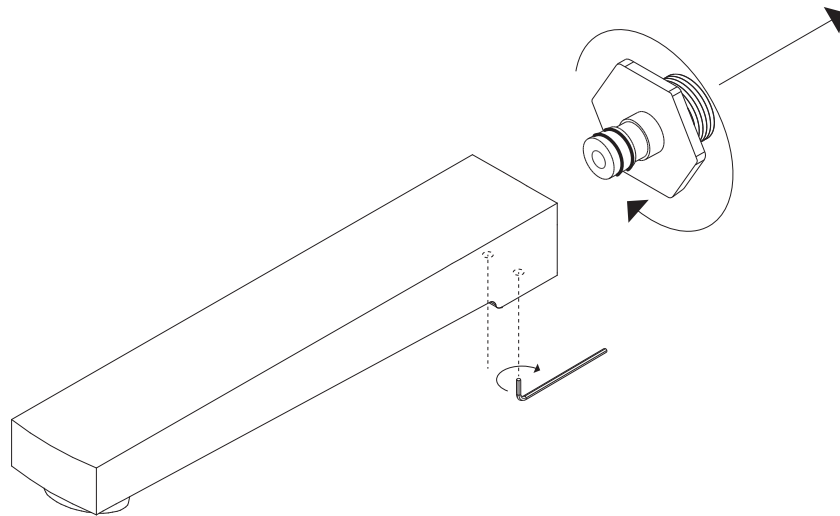

STEP 2

1-3/8" DIAMETER THROU
FINISHED WALL

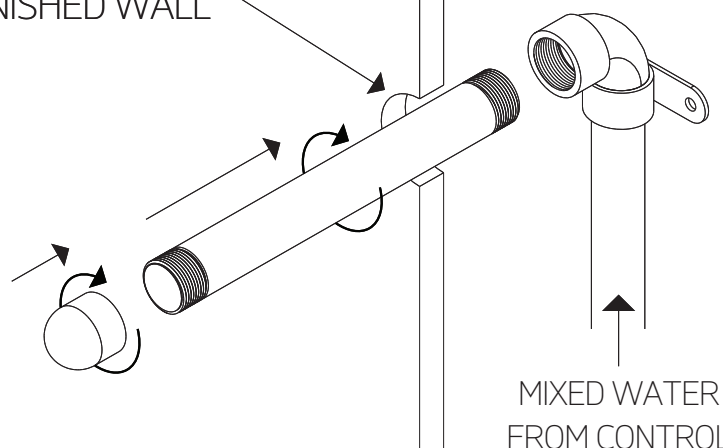

INSTALLATION STEPS

for F702-3


STEP 3

1-3/8" DIAMET
THROUGH FINISHED
WALL


MIXED WATER
FROM CONTROL

STEP 4


STEP 5

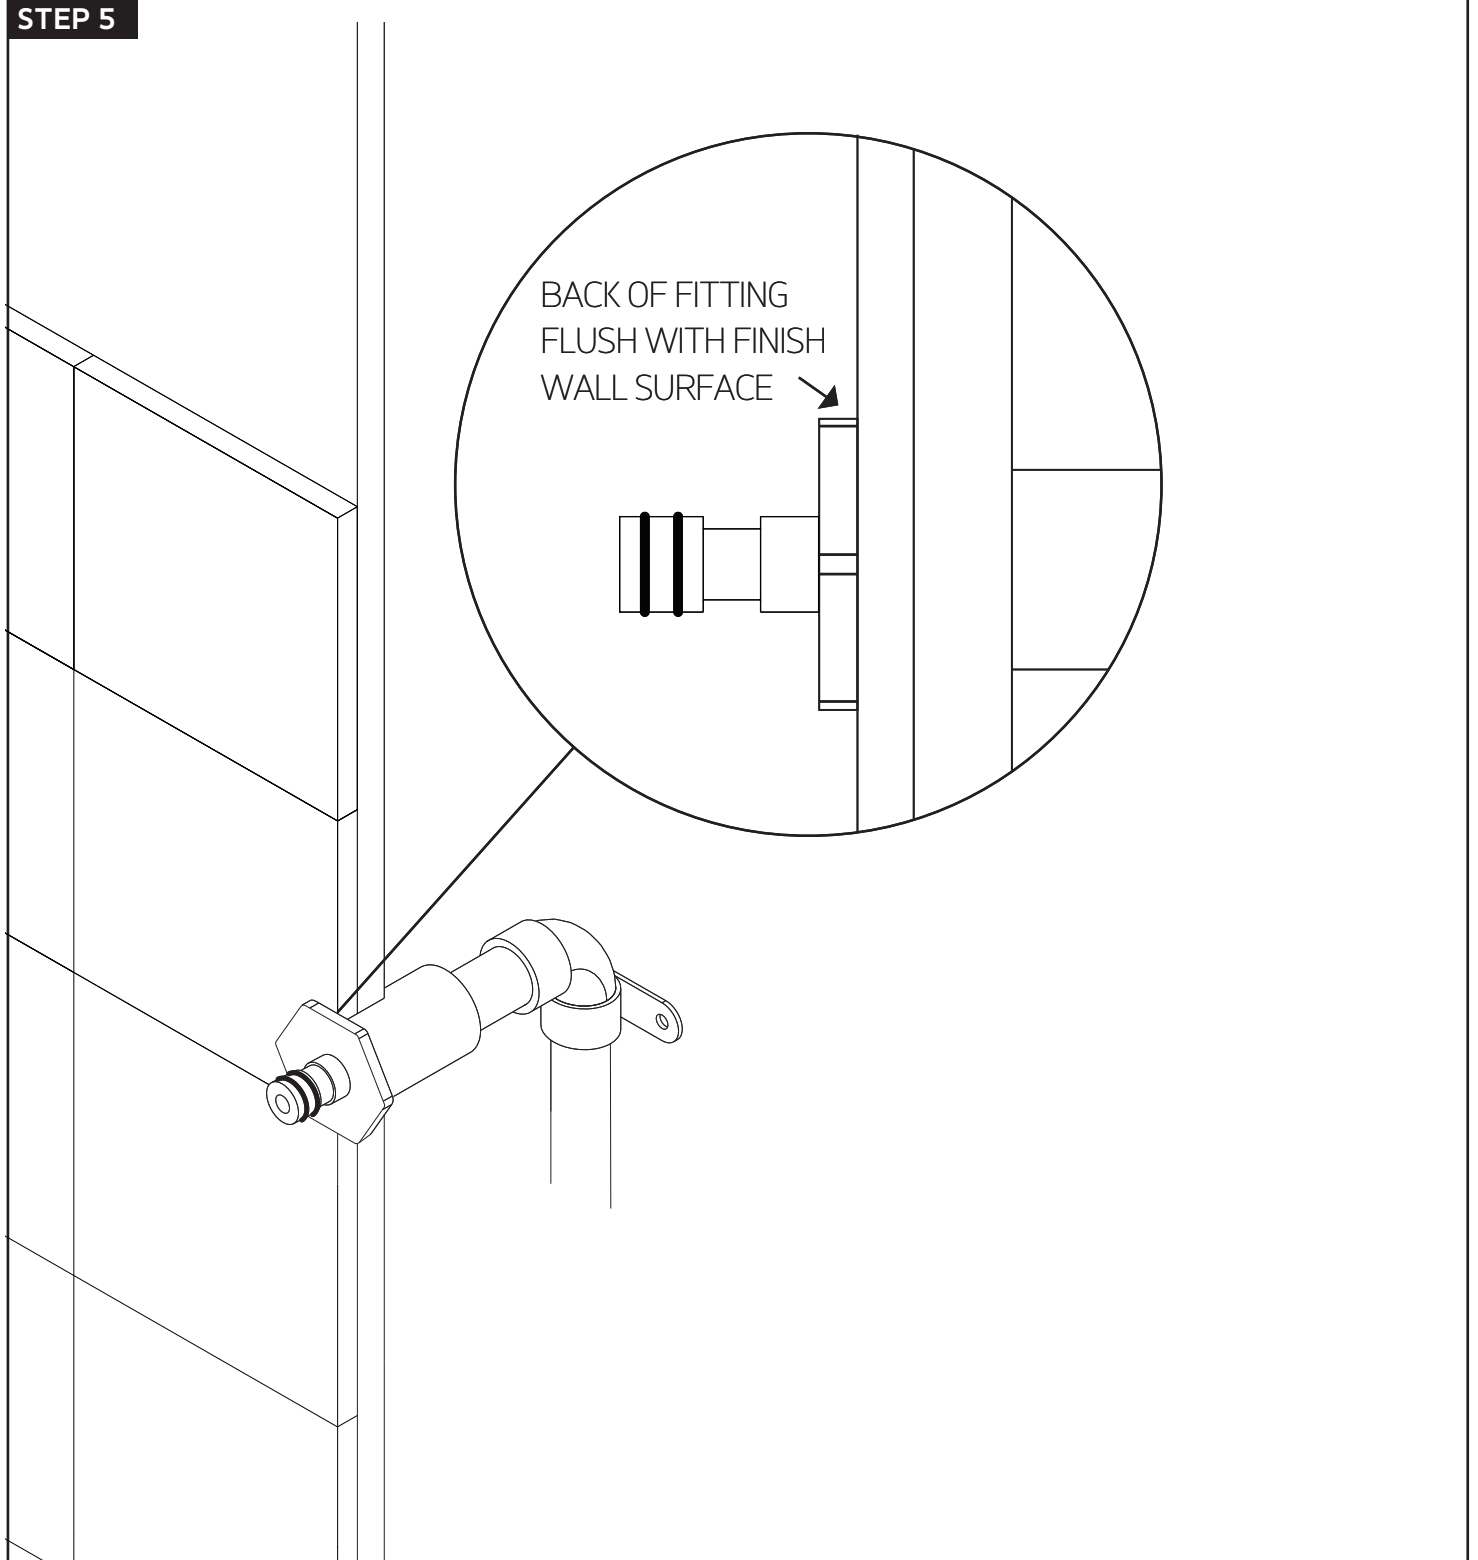

STEP 6

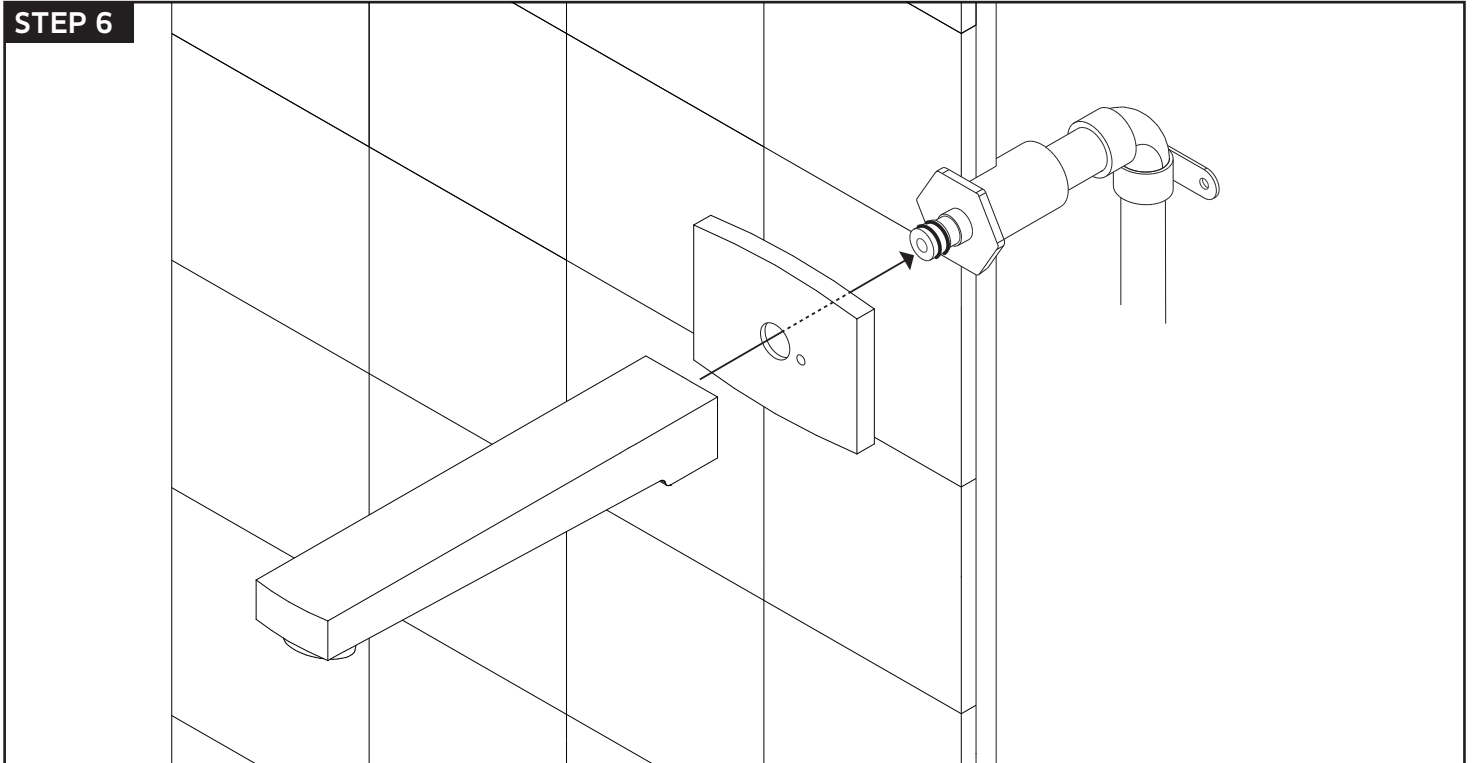

STEP 7

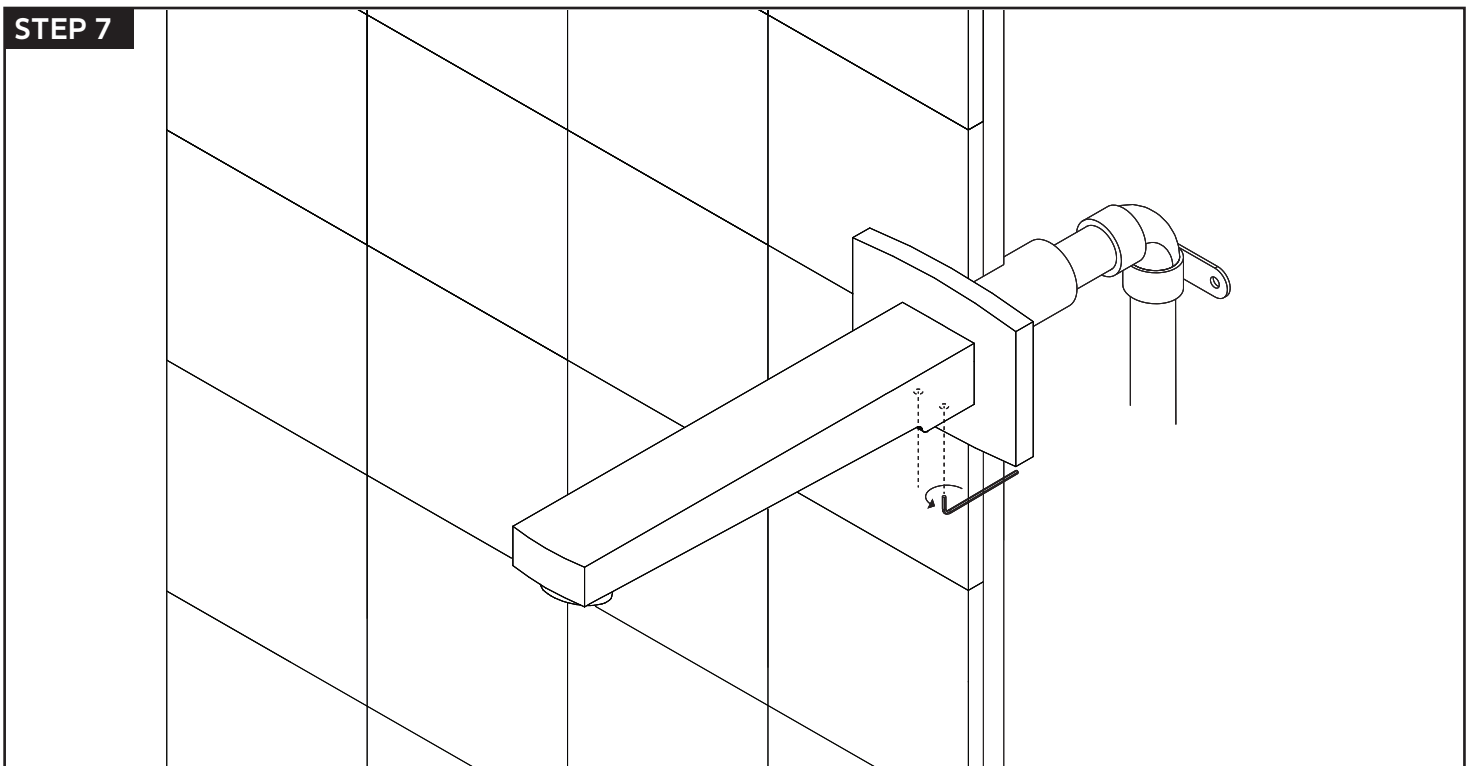



artos®

PS115


premier series shower set

PARTS BREAKDOWN

for F903B-55TK

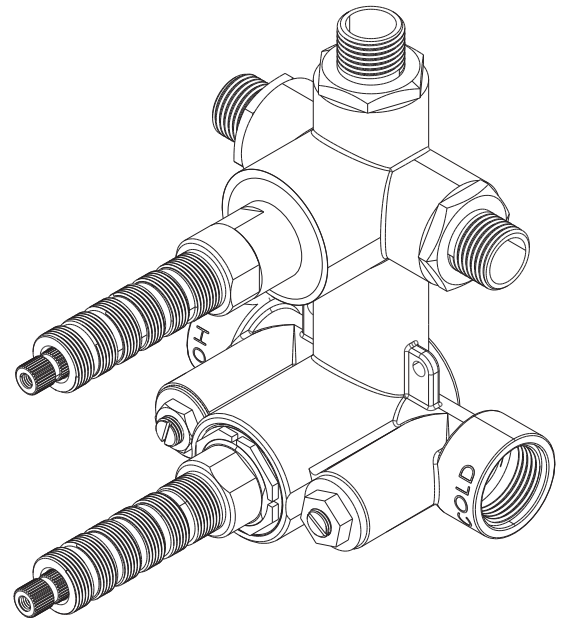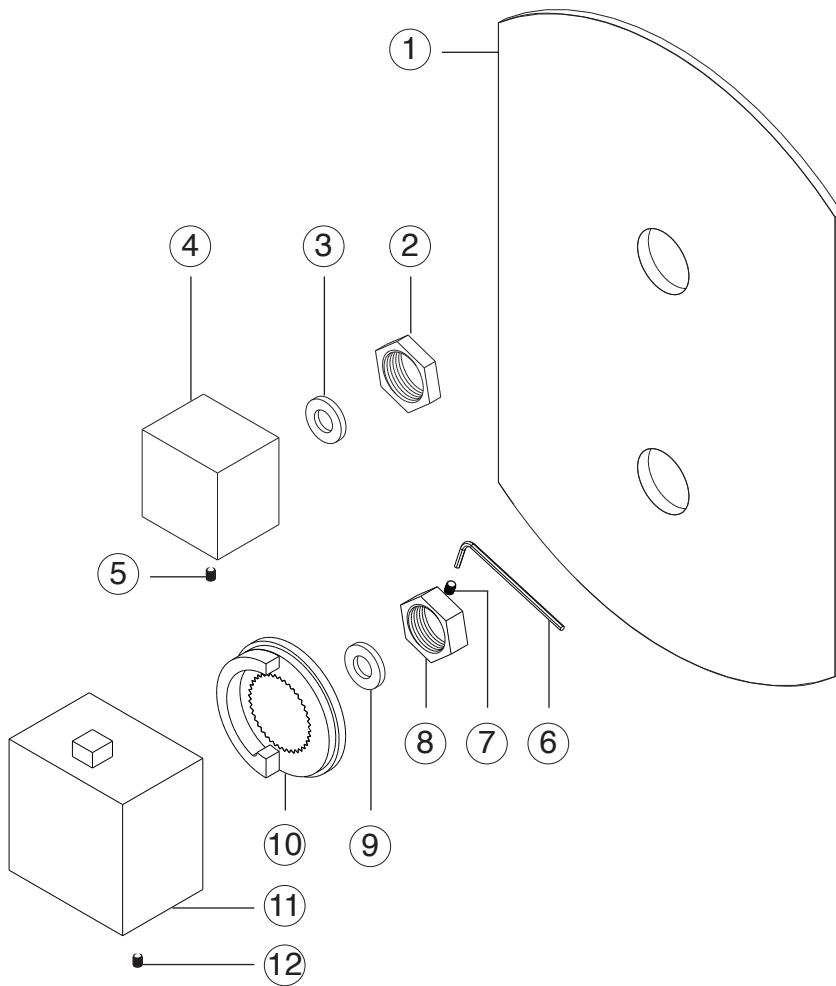

- | | |
|---|--|
| ① ESCUTCHEON F903B-59TK XP1 | ⑧ THERMOSTAT LOCKING NUT F903B-59TK XP8 |
| ② DIVERTER LOCKING NUT F903B-59TK XP2 | ⑨ NYLON WASHER F903B-59TK XP9 |
| ③ NYLON WASHER F903B-59TK XP3 | ⑩ TEMPERATURE LIMITING RING F903B-59TK XP10 |
| ④ DIVERTER HANDLE F903B-59TK XP4 | ⑪ THERMOSTAT HANDLE F903B-59TK XP11 |
| ⑤ DIVERTER SET SCREW F903B-59TK XP5 | ⑫ THERMOSTAT SET SCREW F903B-59TK XP12 |
| ⑥ ALLEN WRENCH F903B-59TK XP6 | |
| ⑦ LOCKING NUT SET SCREW F903B-59TK XP7 | |

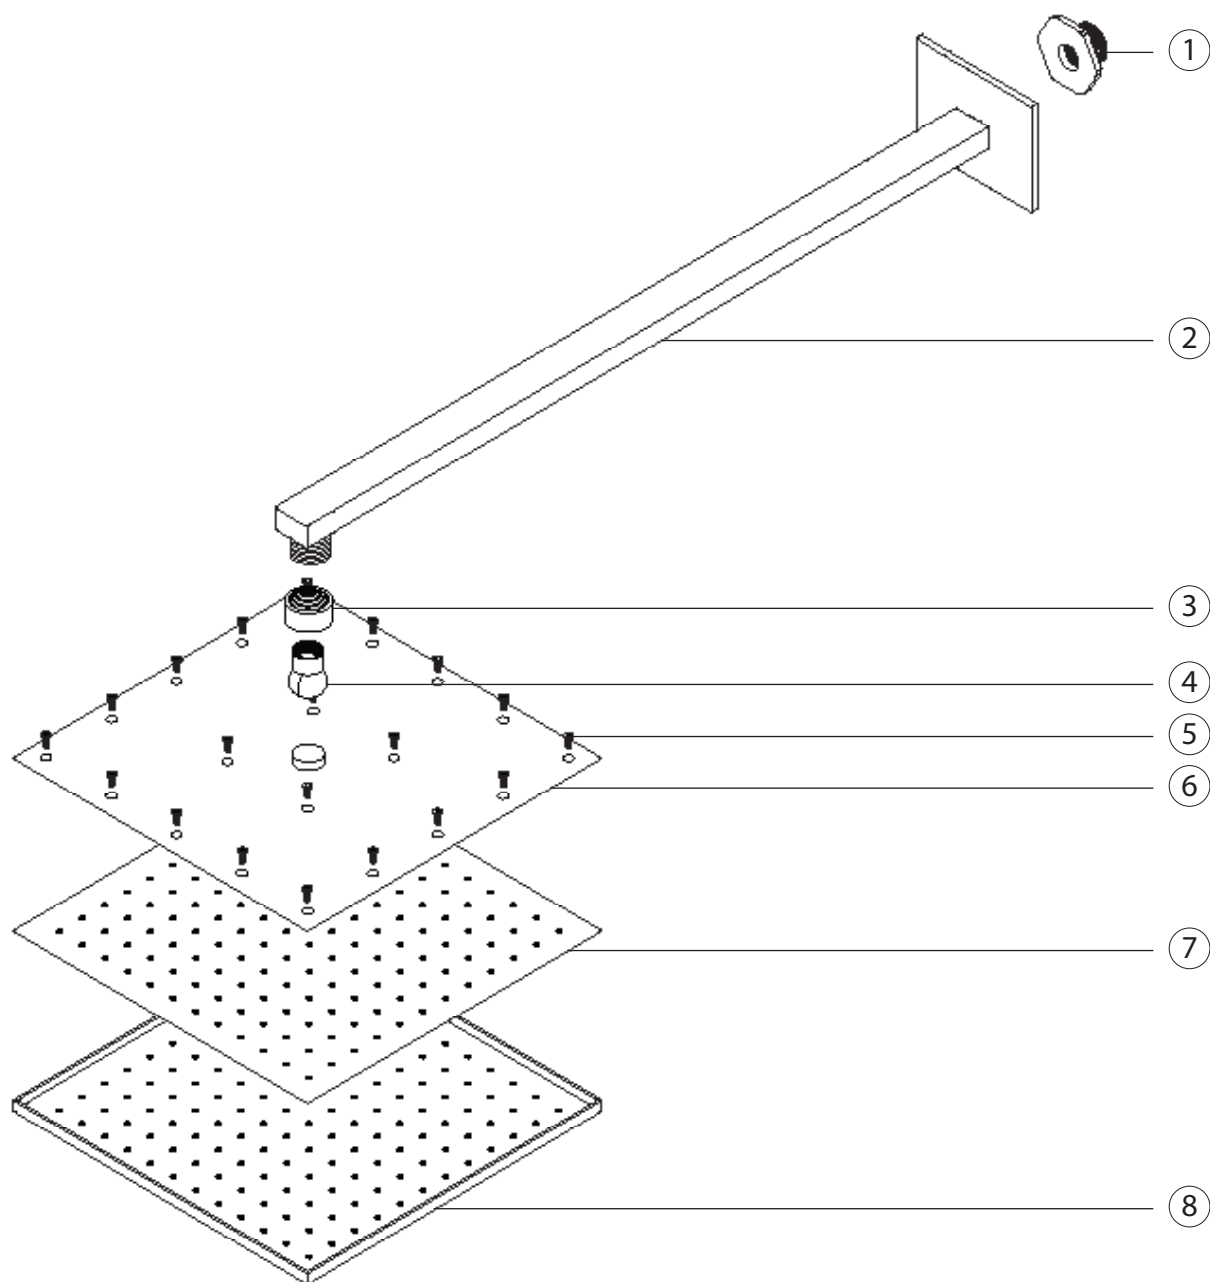


- | | |
|--|---|
| ① SHOWER FITTING F907-50 XP1 | ⑦ RUBBER MATRIX F907-50 XP7 |
| ② SHOWER ARM F907-50 XP2 | ⑧ SHOWER HEAD BOTTOM F907-50 XP8 |
| ③ SWIVEL ARM SECURING NUT F907-50 XP3 | |
| ④ SWIVEL ARM F907-50 XP4 | |
| ⑤ SHOWER HEAD SCREWS F907-50 XP5 | |
| ⑥ SHOWER HEAD TOP F907-50 XP6 | |

PS114

premier series shower set

PARTS BREAKDOWN

for F905-1

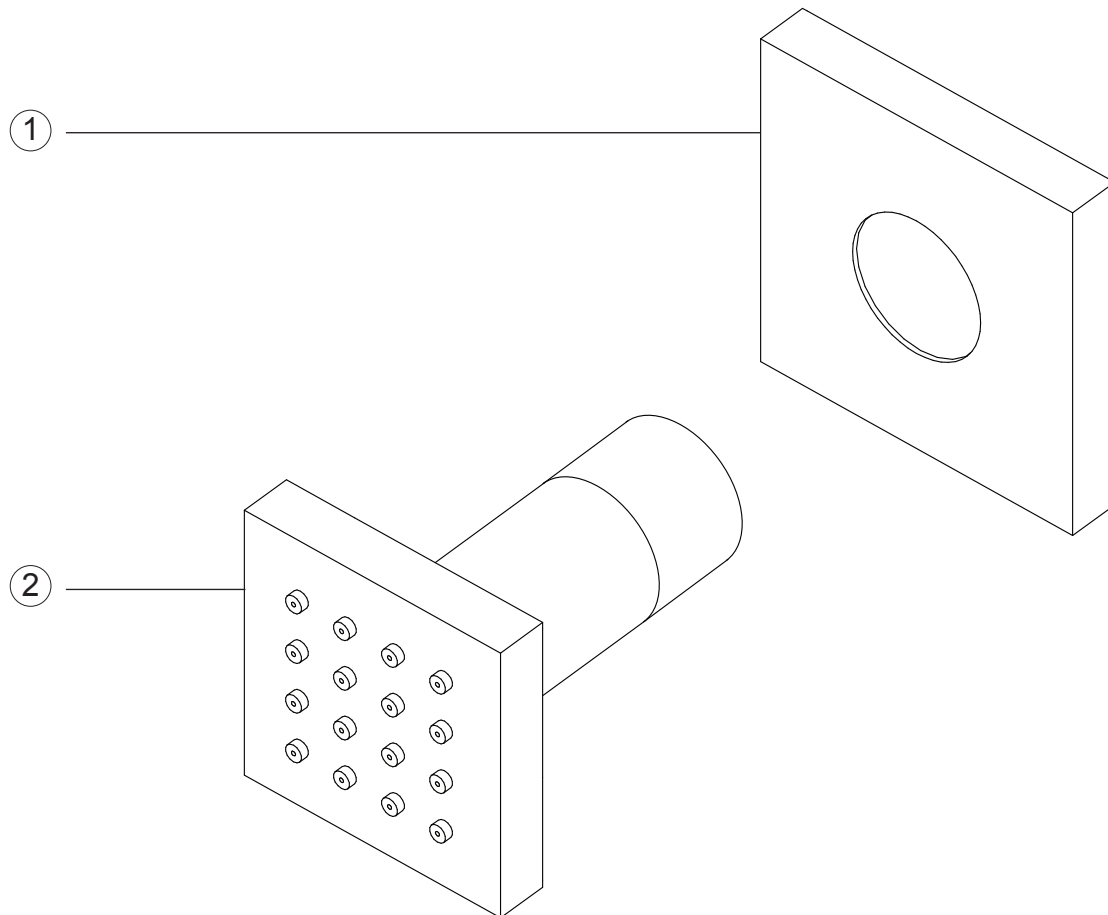

① **ESCUTCHEON** F905-1 XP1


② **BODY JET** F905-1 XP2

PS114

PARTS BREAKDOWN

premier series shower set

for 702-3

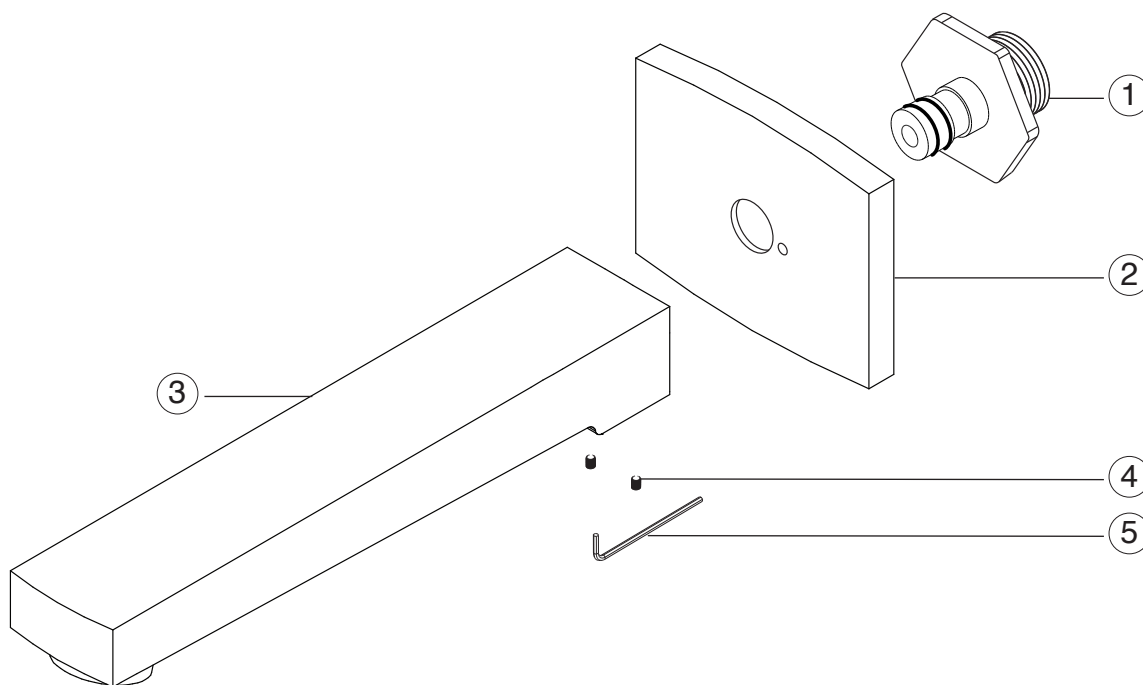

- ① **WALL CONNECTION** F702-3 XP1
- ② **ESCUTCHEON** F702-3 XP2
- ③ **SPOUT** F702-3 XP3
- ④ **SET SCREW(2)** F702-3 XP4
- ⑤ **ALLEN WRENCH** F702-3 XP5

PS114

premier series shower set

CARE & MAINTENANCE

For best results, keep the following in mind to retain the high quality finish of your artos® shower kit:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

artos® shower kits are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

ITEM NO. **PS114**
SERIAL NO.