

artos[®]

TS266

OPERATING SPECIFICATIONS

Round 2-Way Pressure Balance Shower
Trim Kit with Multifunction Shower Head
and Tub Spout



INCLUDES

Rain Head & Arm
Valve Trim
Tub Spout

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 125 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

Shower Head: 1.8 USGPM
Tub Spout: 6 USGPM


STANDARDS

ASSE 1016-2011 | ASME_A112.1016-2011 | CSA B125:16-11



Round 2-Way Pressure Balance Shower
Trim Kit with Multifunction Shower
Head and Tub Spout

for trim kit

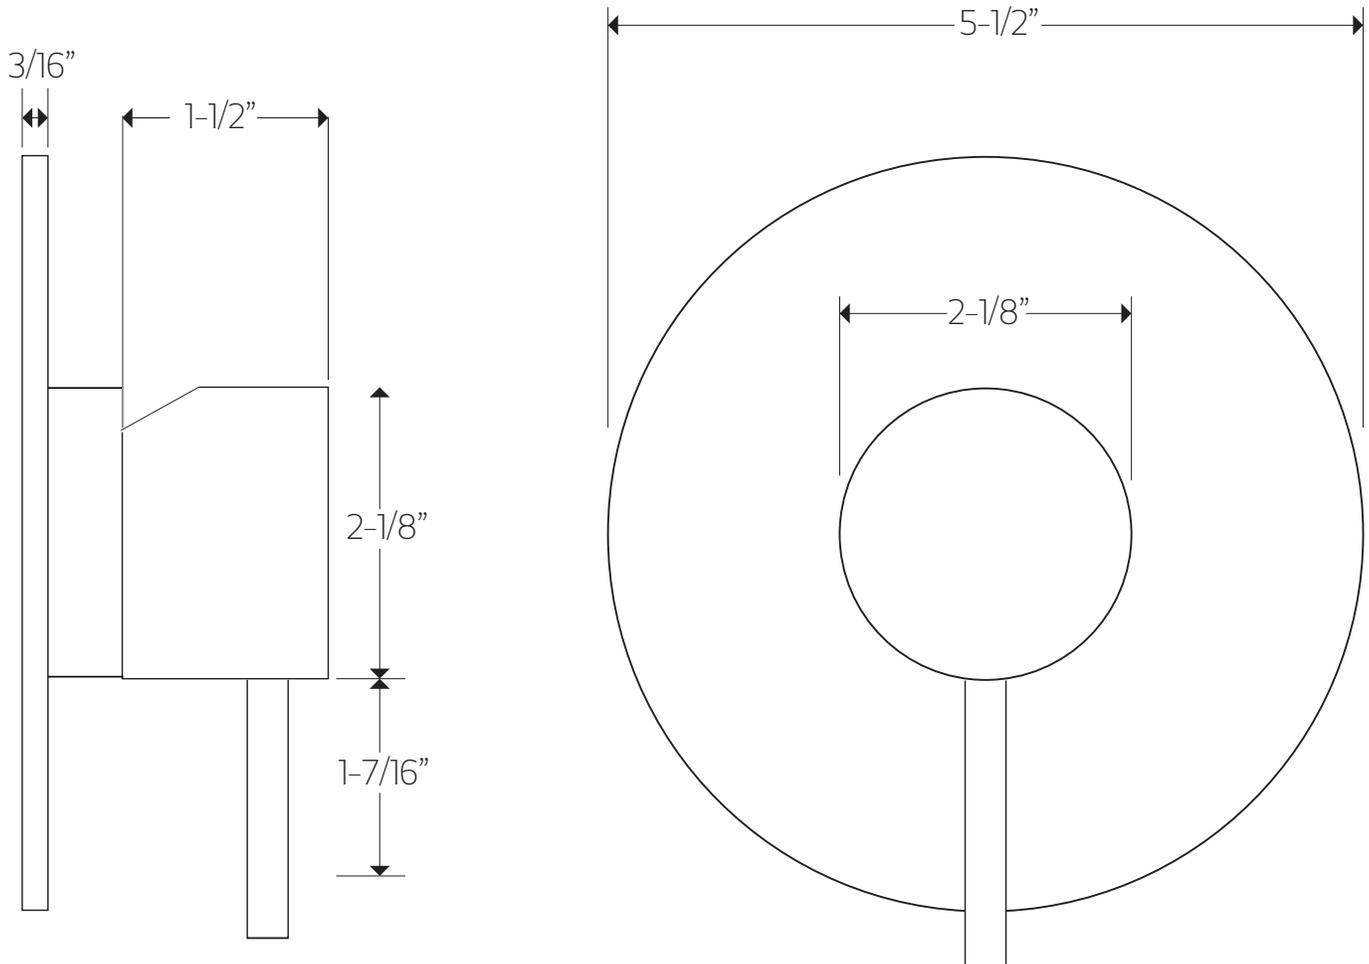



artos[®]

TS266

PRODUCT DIMENSIONS

Round 2-Way Pressure Balance Shower
Trim Kit with Multifunction Shower
Head and Tub Spout

for shower head

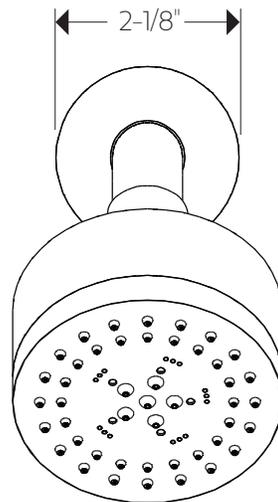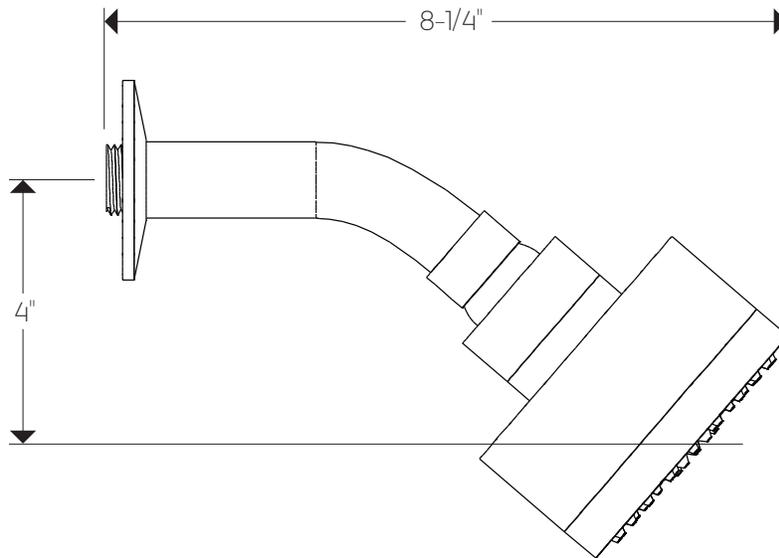

artos[®]

TS266

PRODUCT DIMENSIONS

Round 2-Way Pressure Balance Shower
Trim Kit with Multifunction Shower
Head and Tub Spout

for tub spout

