




artos<sup>®</sup>  
the art of style



F903A-40VO

TECHNICAL DATA SHEET

pressure balance mixer valve  
only

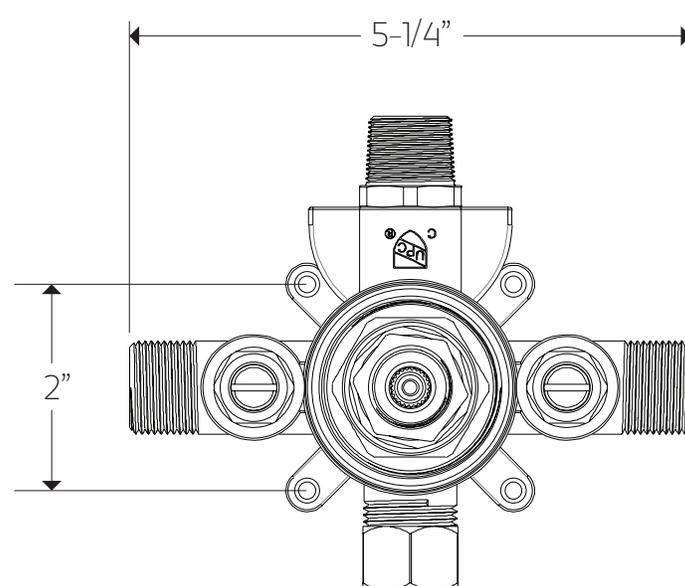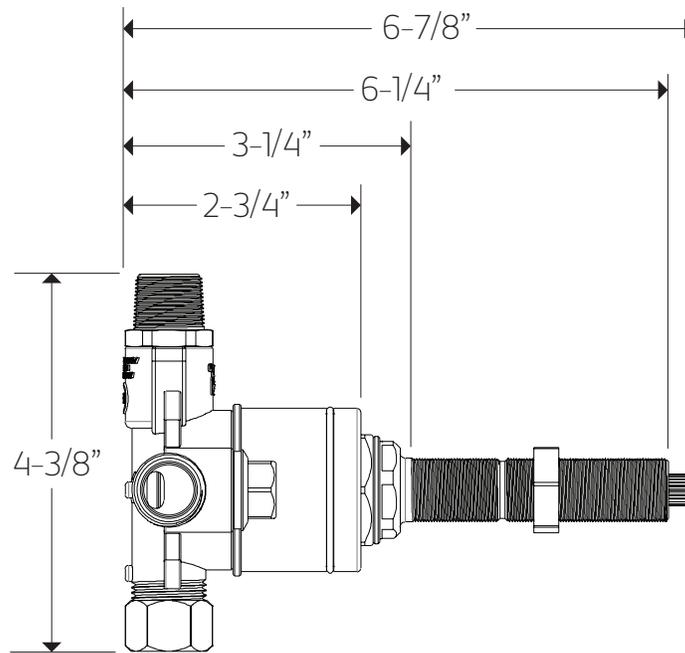

# artos<sup>®</sup>

## F903A-40V0

pressure balance mixer valve  
only

## OPERATING SPECIFICATIONS



### FEATURES

Built-in Service Stops

### FLOW RATE

5.8 USGPM

### MIXED WATER TEMPERATURE

Maximum: 120°F

### HOT WATER SUPPLY TEMPERATURE

Maximum: 180°F

Minimum: 50°F

Advisable: 150°F- 160°F

Minimum difference between hot mixed temperature 50°F

### OPERATING PRESSURE

Maximum: 125psi

Minimum: 20psi

Recommended: 30psi- 95psi

Operating pressures (on hot and cold lines) should be kept as balanced as possible, in order to assure the maximum efficiency.

### APPROVALS

