artos

PS124

premier series shower set





OPERATING SPECIFICATIONS

FEATURES

Solid Brass 3-Outlets

INCLUDES

F903B-58TK F907-28 F907-60 F905-2 x 3

OPERATING PRESSURE

Minimum: 15 psi Maximum: 75 psi Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE Maximum: 176°

FLOW CAPACITY

Hand Shower: 1.8 USGPM Shower Head: 1.8 USGPM Body Jets: 1.8 USGPM




artos®

PS124

premier series shower set

PRODUCT DIMENSIONS

for trim kit

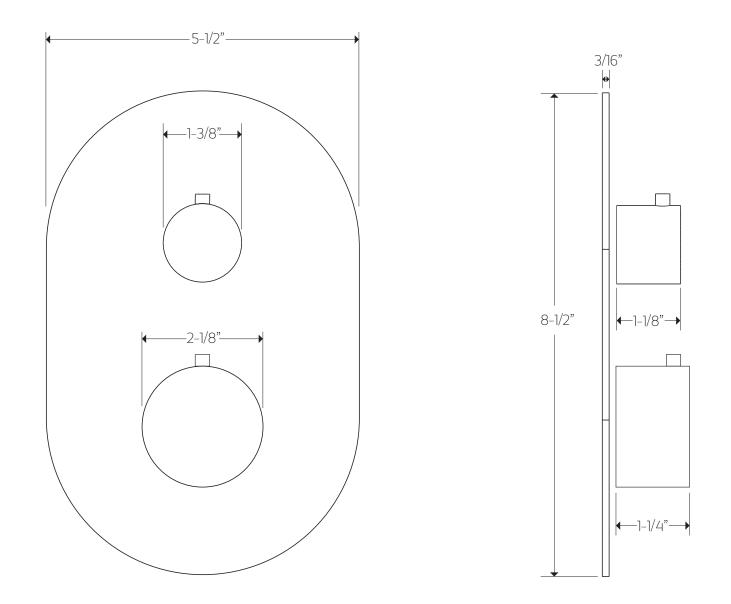

© 090122 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.


artos

PS124

premier series shower set

PRODUCT DIMENSIONS

for shower head

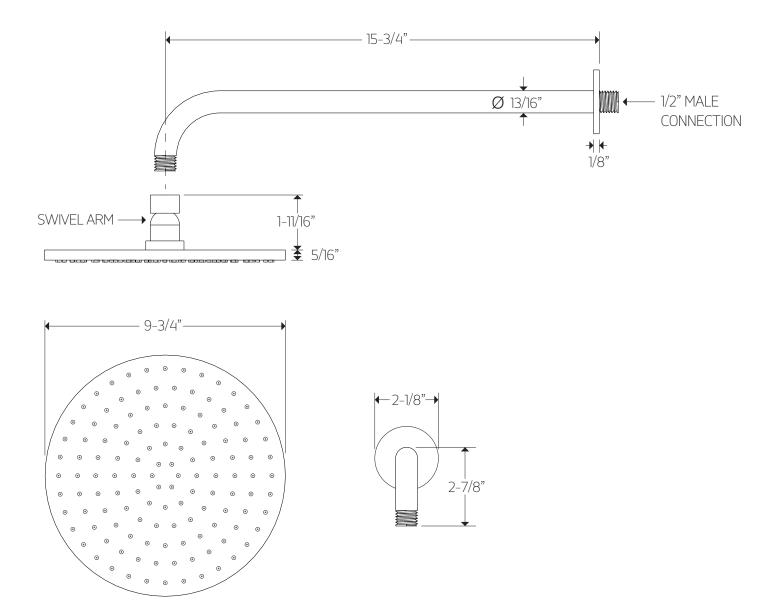


artos[®] PS124

premier series shower set

PRODUCT DIMENSIONS

for hand shower

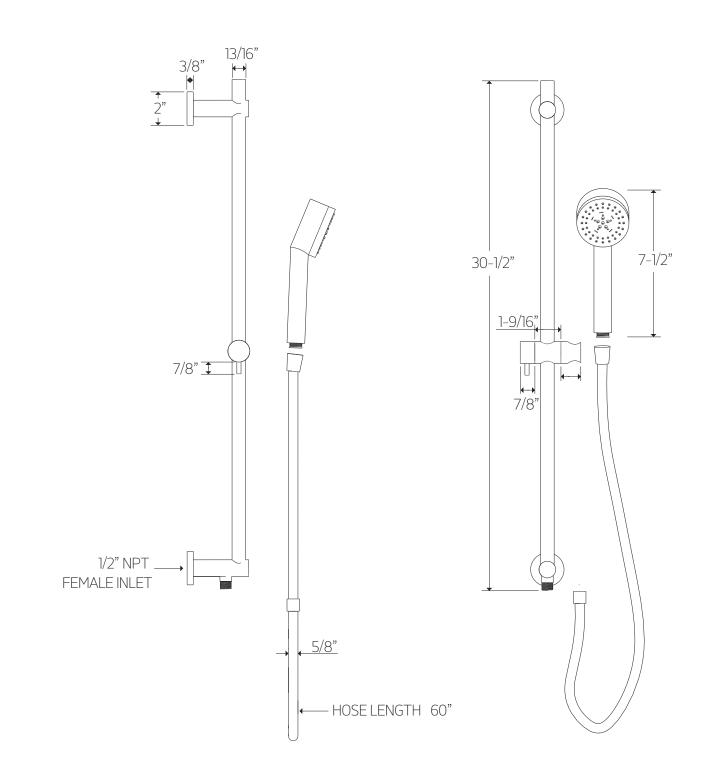

© 090122 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos®

PS124

premier series shower set

PRODUCT DIMENSIONS

for body jet

