

# artos<sup>®</sup>

## PS125

## OPERATING SPECIFICATIONS

premier series shower set



### FEATURES

Solid Brass  
3-Outlet



### OPERATING PRESSURE

Minimum: 15 psi  
Maximum: 75 psi  
Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW CAPACITY

Hand Shower: 1.8 USGPM  
Shower Head: 1.8 USGPM  
Body Jet: 1.8 USGPM

### F901-8 & F902-14 APPROVAL





# artos<sup>®</sup>

PS125

## PRODUCT DIMENSIONS

premier series shower set

for trim kit

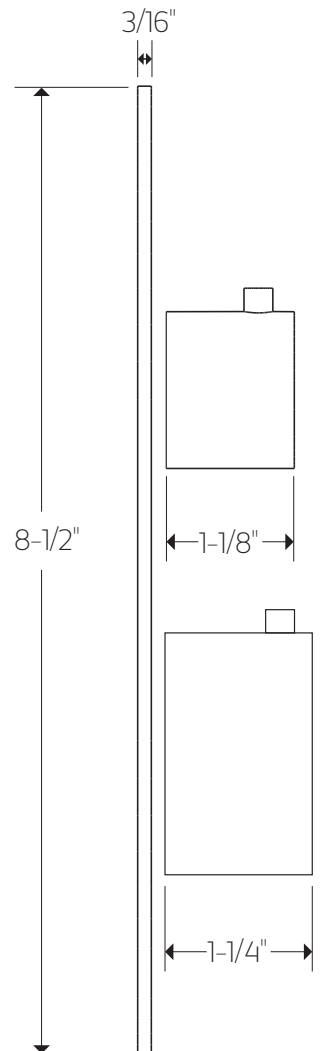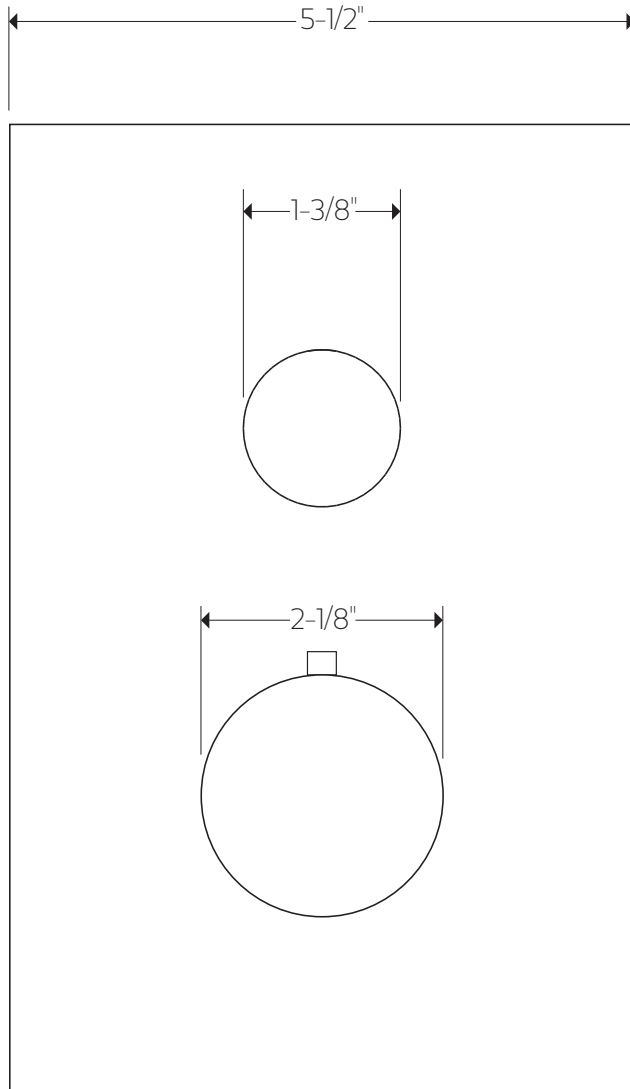


# artos<sup>®</sup>

## PS125

## PRODUCT DIMENSIONS

premier series shower set

for shower head

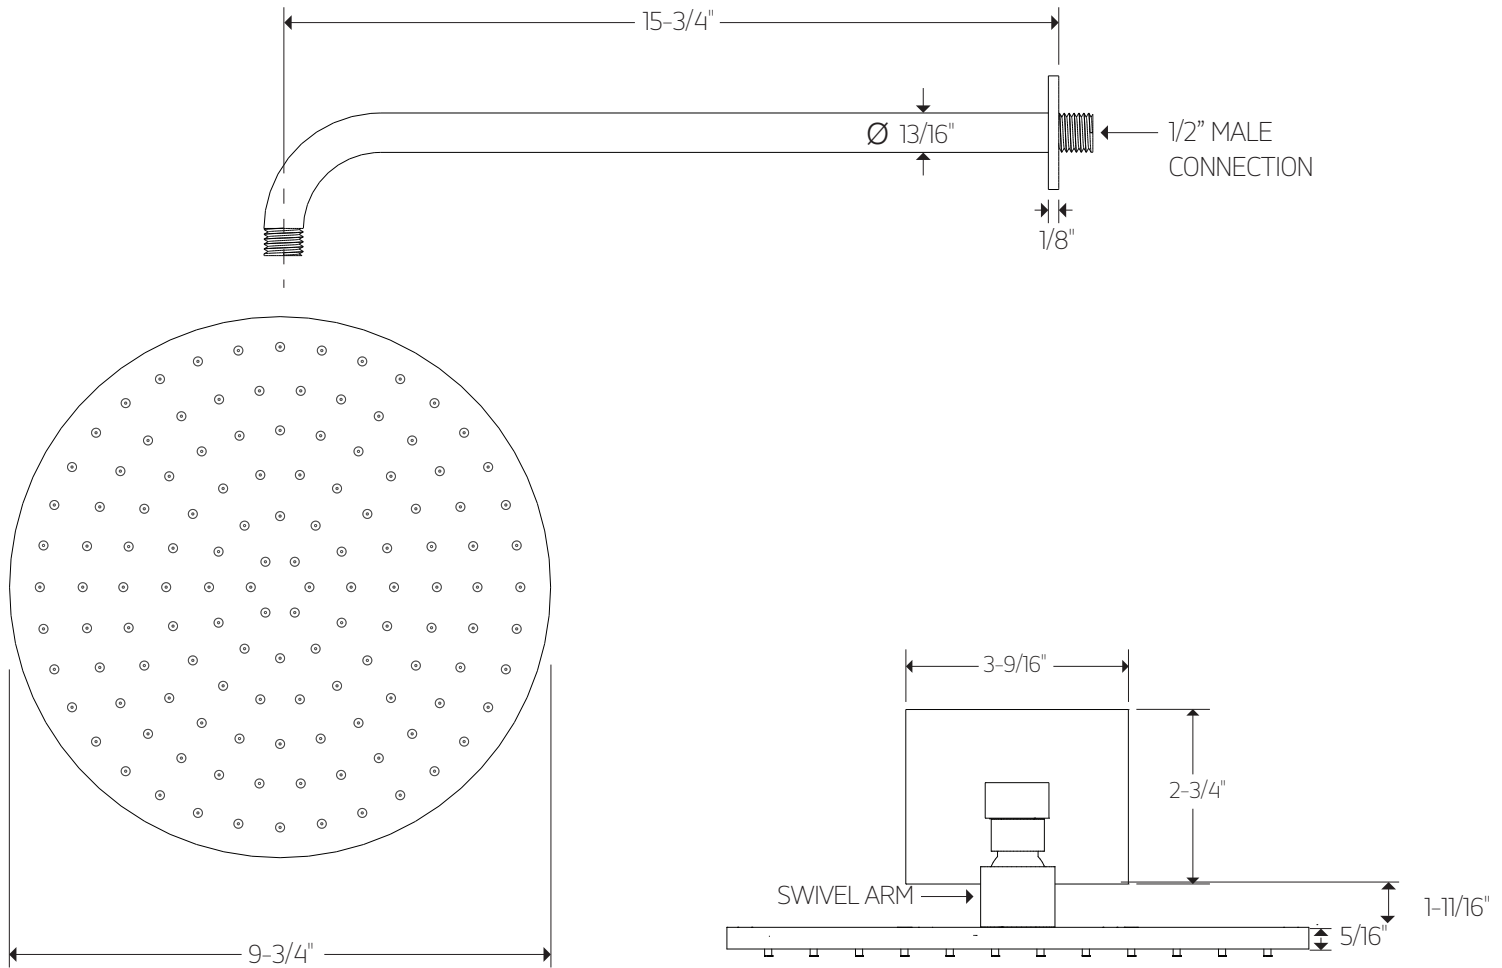


# artos<sup>®</sup>

## PS125

premier series shower kit

### PRODUCT DIMENSIONS

for hand shower

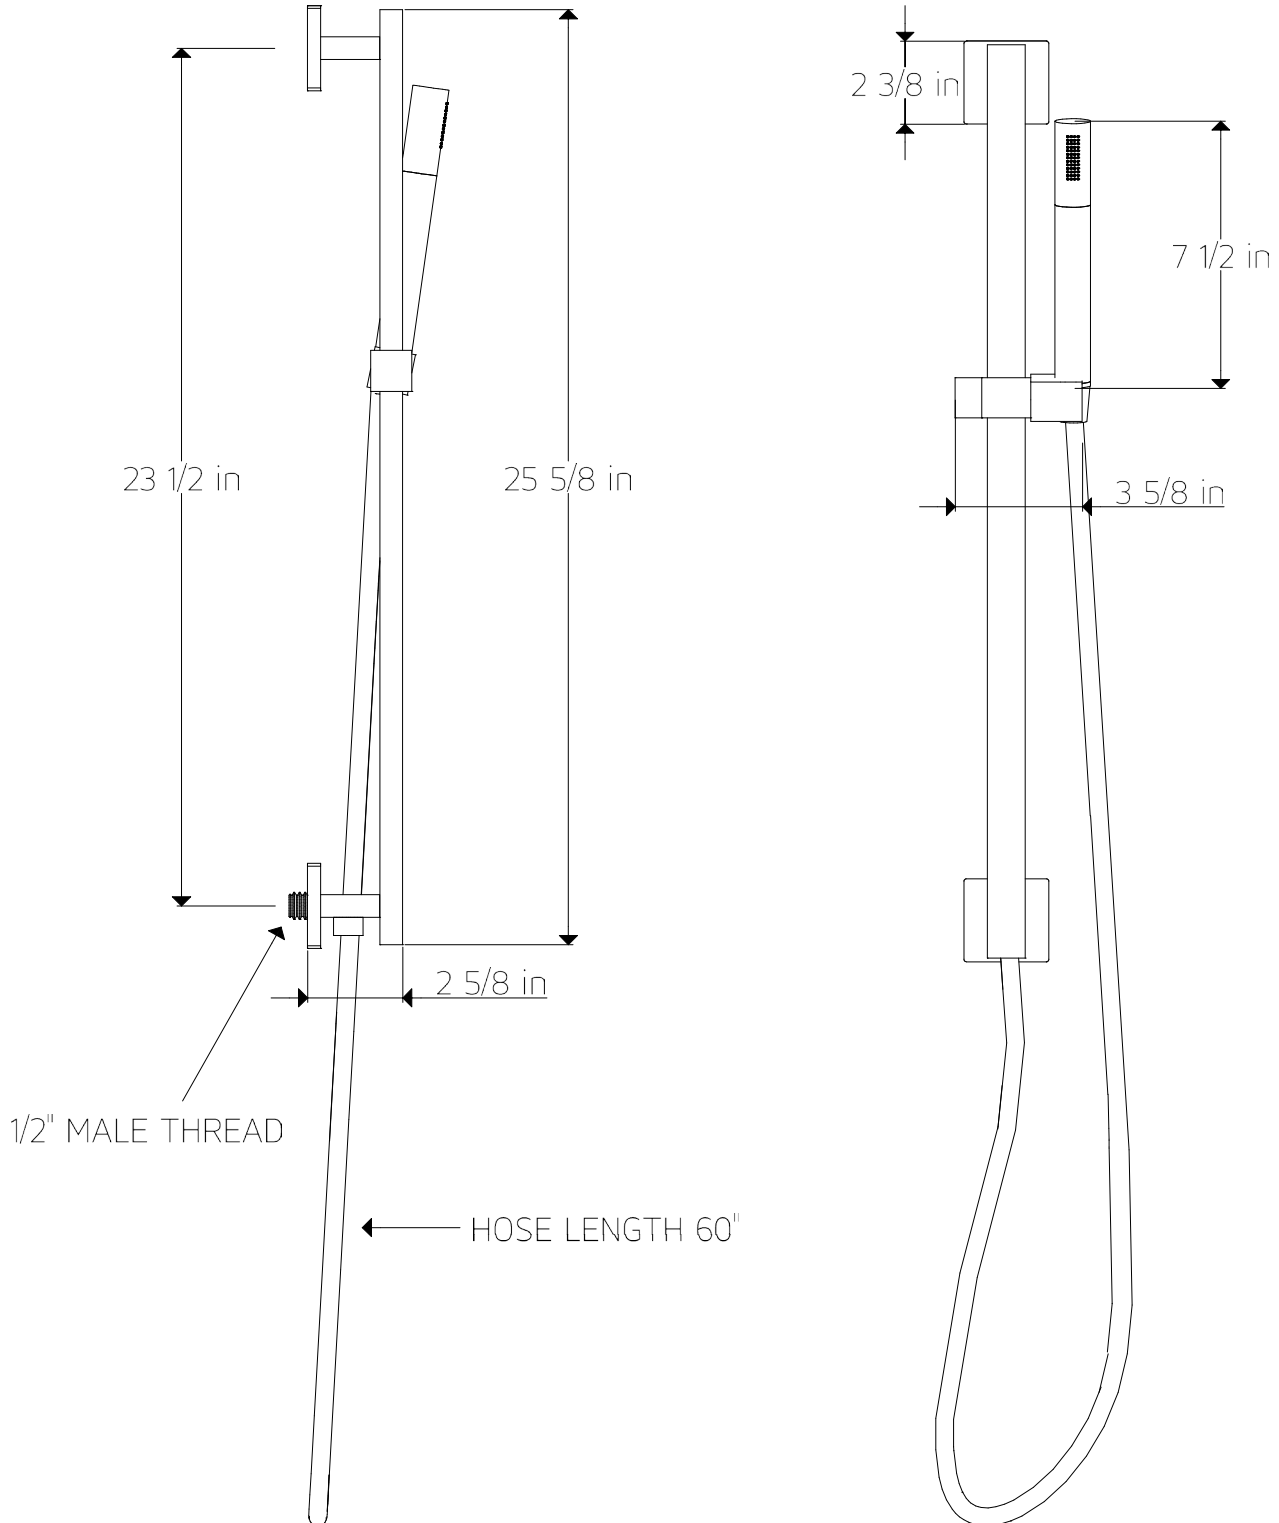

# artos<sup>®</sup>

## PS125

premier series shower set

### PRODUCT DIMENSIONS

for body jet

