

OPERATING SPECIFICATIONS

premier series shower set







FEATURES

Solid Brass 2-Outlets

INCLUDES

F903B-55TK F703-6 F901-9 & F703-1-ARZ

OPERATING PRESSURE

Minimum: 15 psi Maximum: 75 psi

+90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

Hand Shower: 2.0 USGPM Shower Head: 1.8 USGPM


F901-9 APPROVAL






PRODUCT DIMENSIONS

premier series shower set for F903B-55TK

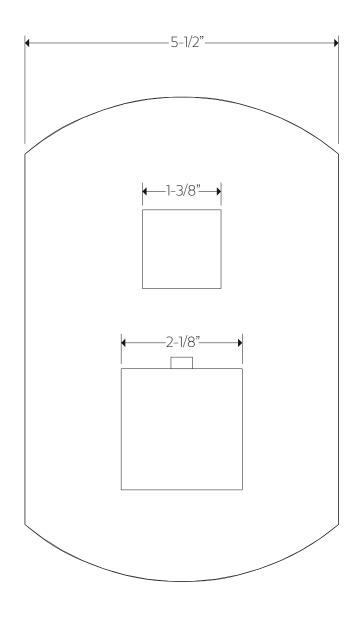

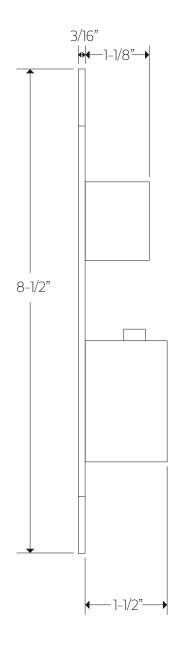





PRODUCT DIMENSIONS

premier series shower set

for F901-9 & F703-1-ARZ

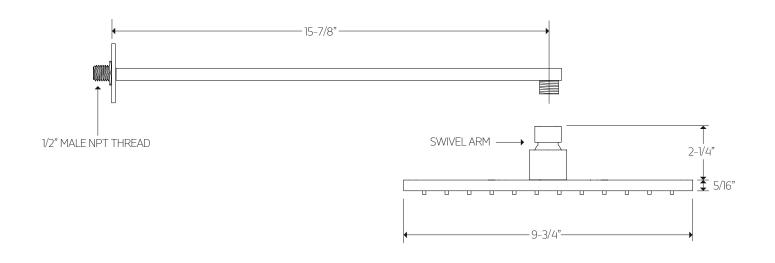





PRODUCT DIMENSIONS

premier series shower set for F703-6

