

# artos<sup>®</sup>

## PS150

premier series shower set

## OPERATING SPECIFICATIONS

### FEATURES

Solid Brass

2-Outlets

### INCLUDES

F703-4

F702-3

F903B-55

### OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW CAPACITY

Hand Shower: 2.0 USGPM

Tub Filler: 6.1 USGPM

### F901-8 & F902-14 APPROVAL





# artos<sup>®</sup>

PS150

## PRODUCT DIMENSIONS

premier series shower set

for trim kit

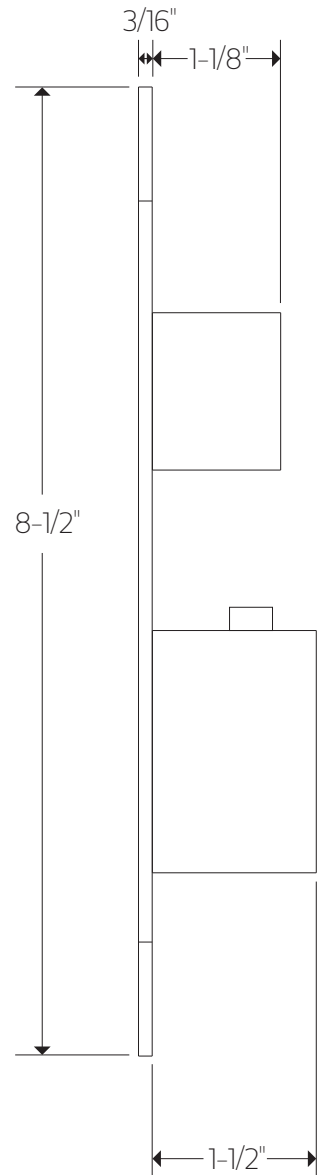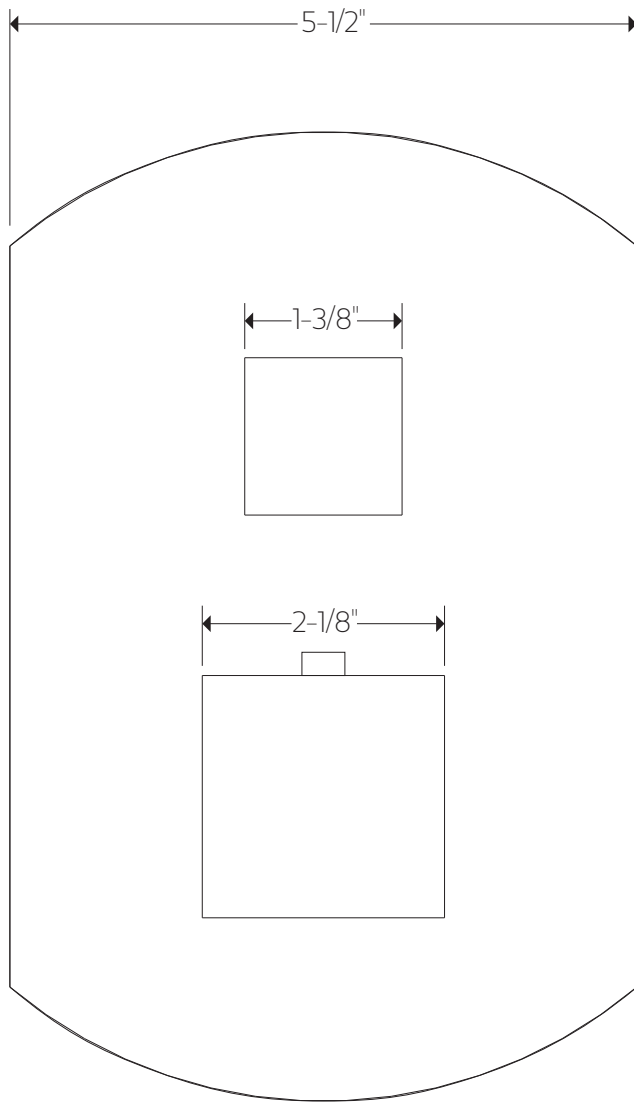


# artos<sup>®</sup>

## PS150

premier series shower set

## PRODUCT DIMENSIONS

for hand shower

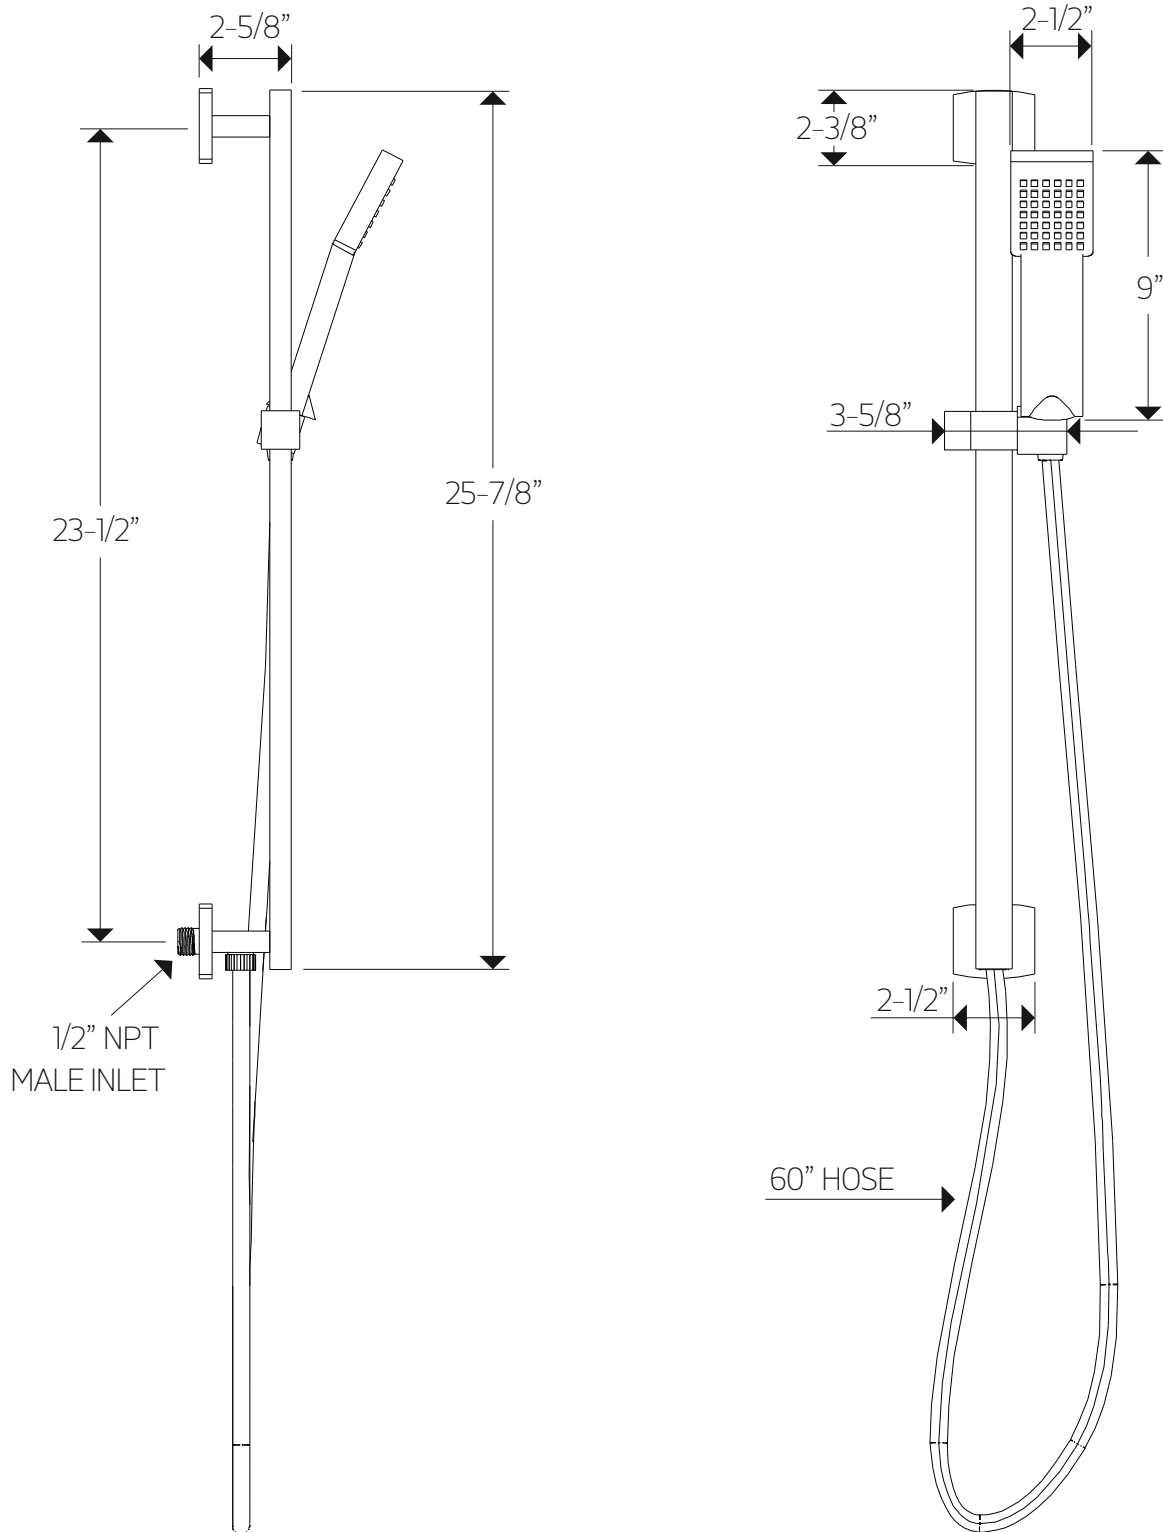

# artos<sup>®</sup>

PS 150

premier series shower set

## PRODUCT DIMENSIONS

for tub filler

