

artos[®]

TS161

trova shower set round

OPERATING SPECIFICATIONS



MIXED WATER TEMPERATURE

Maximum: 120°F

INCLUDES

Muliti-Function Shower Head & Arm
Valve-Trim

OPERATING PRESSURE

Minimum: 20 psi

Maximum: 125 psi

Recommended: 30psi - 95psi

Operating pressures (on hot and cold lines) should be kept as balanced as possible, in order to assure the maximum efficiency.

HOT WATER SUPPLY TEMPERATURE

Maximum: 185°F

Minimum: 50°F

Advisable: 150°F - 160°F

Minimum difference between hot mixed temperature 50°F

FLOW CAPACITY

Shower Head: 1.8 USGPM

STANDARDS

ASSE 1016-2011 | ASME_A112.1016-2011 | CSA B125:16-11




artos[®]

TS161

PRODUCT SPECIFICATIONS

trova shower set

for trim kit

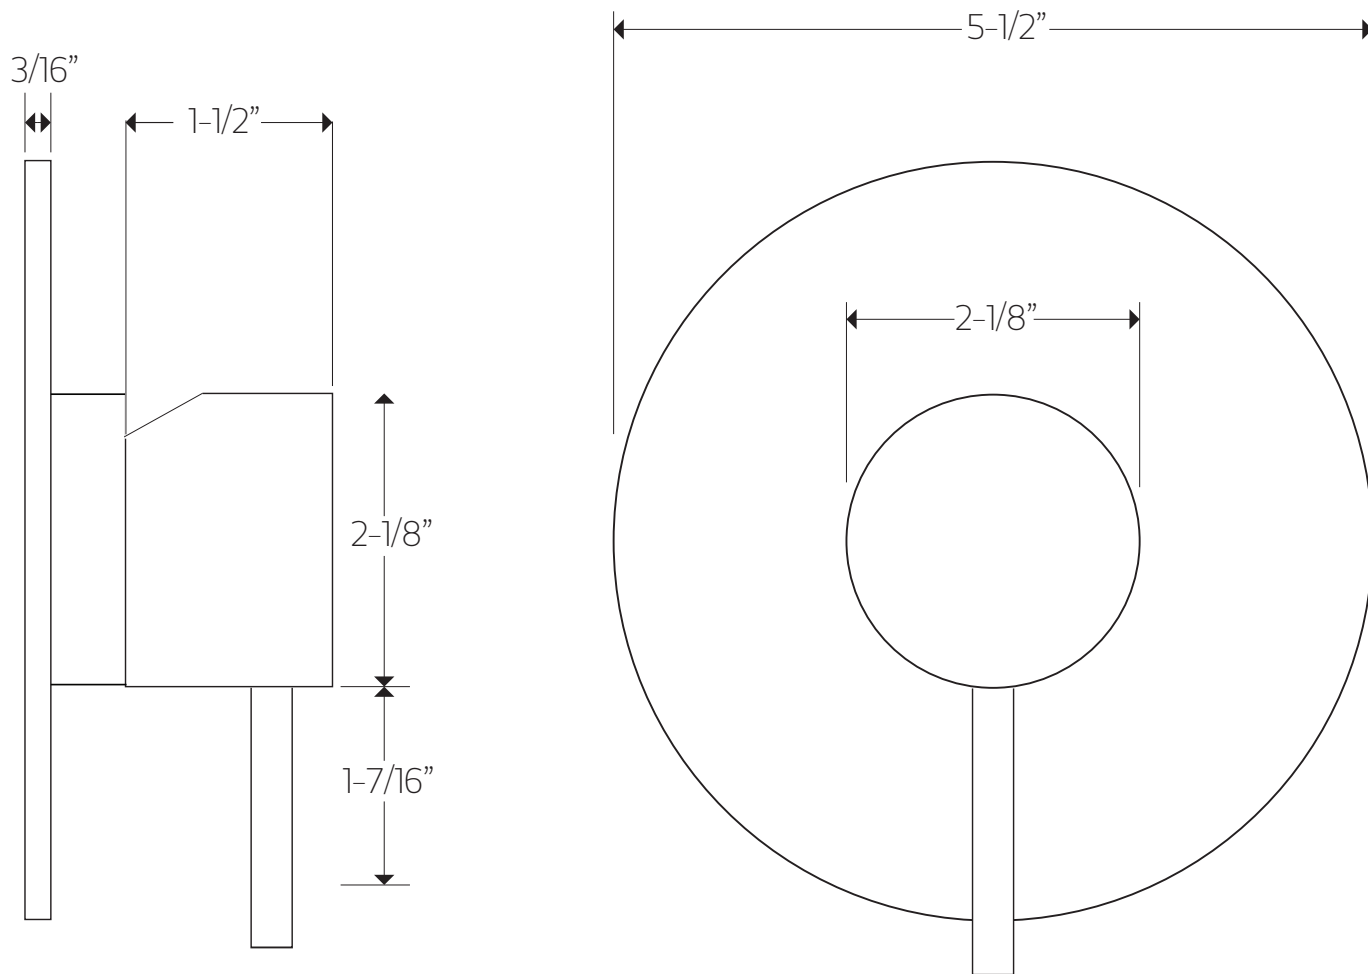

artos[®]

TS161

trova shower set round

PRODUCT DIMENSIONS

for shower head

