artos

TS171 trova shower set square

OPERATING SPECIFICATIONS





MIXED WATER TEMPERATURE

Maximum: 120°F

INCLUDES

Shower Head & Arm Valve Trim

OPERATING PRESSURE

Minimum: 20 psi Maximum: 125 psi Recommended: 30 psi - 95 psi Operating pressures (on hot and cold lines) should be kept as balanced as possible, in order to assure the maximum efficiency.

HOT WATER SUPPLY TEMPERATURE

Maximum: 185°F Minimum: 50°F Advisable: 150°F - 160°F Minimum difference between hot mixed temperature: 50°F

FLOW CAPACITY

Shower Head: 1.8 GPM

APPROVAL




artos®

TS171 L

PRODUCT DIMENSIONS

square

for trim kit

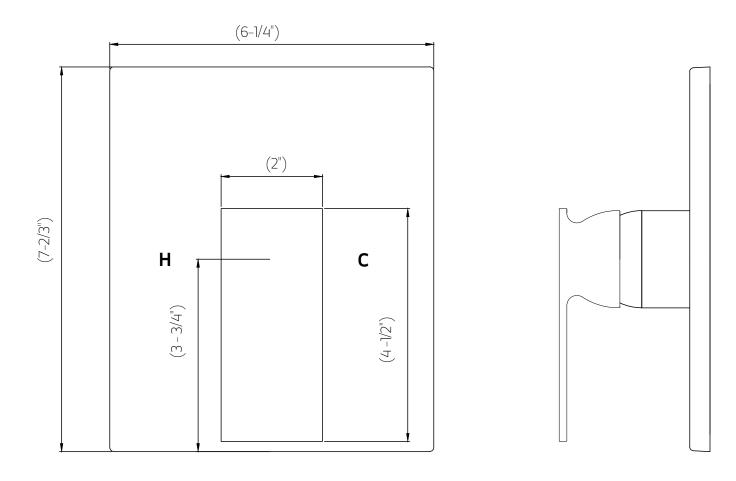

All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.


artos®

TS171

PRODUCT DIMENSIONS

trova shower set square

for shower head

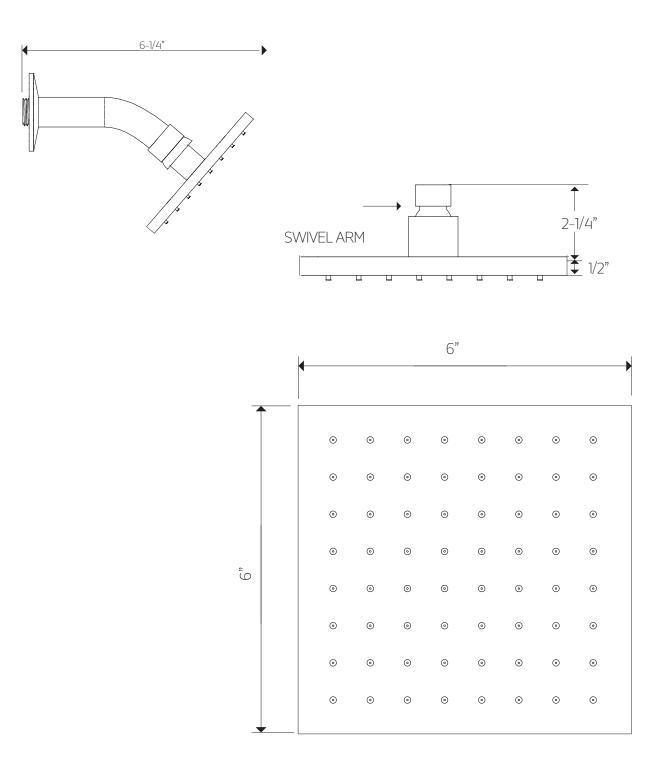

All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.