

**CADET FREESTANDING TUB**

**2764.014M202 CADET FREESTANDING TUB KIT**

**Product Features:**

- Sleek contemporary styling
- High-gloss acrylic-capped ABS with fiberglass reinforcement
- Soaking tub with extra deep bathing well
- Wide accessory storage deck
- Complete tub kit - Chrome Freestanding tub filler with hand spray and drain included
- Pre-leveled tub bottom
- Limited Lifetime warranty

**2764.014 CADET FREESTANDING TUB KIT LESS TUB FILLER**

- Same as above except does not include chrome floor-mounted tub filler with hand spray

**2764.014M203 CADET FREESTANDING TUB KIT**

- Same as M202 except with Satin Nickel finish floor-mounted tub filler with hand spray and drain/overflow

**2764.014M204 CADET FREESTANDING TUB KIT LESS TUB FILLER**

- Same as M203 except does not include Satin Nickel finish floor-mounted tub filler with hand spray

**Nominal Dimensions:**

66" x 32" x 23" (tub only)  
(1676 x 813 x 584mm)

**Installed size with filler:**

66" x 42"min. x 23"  
(1676 x 1067 min. x 584mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- ANSI Z124.1 for Plastic Bathtubs
- cUPC




SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

**To Be Specified - Required:**

- Color: Arctic White

**Optional Components:**

- Universal Bathtub Drain: 1583.470 (specify finish)
- Deep Soak Bathtub Drain: 1640.305 (specify finish)

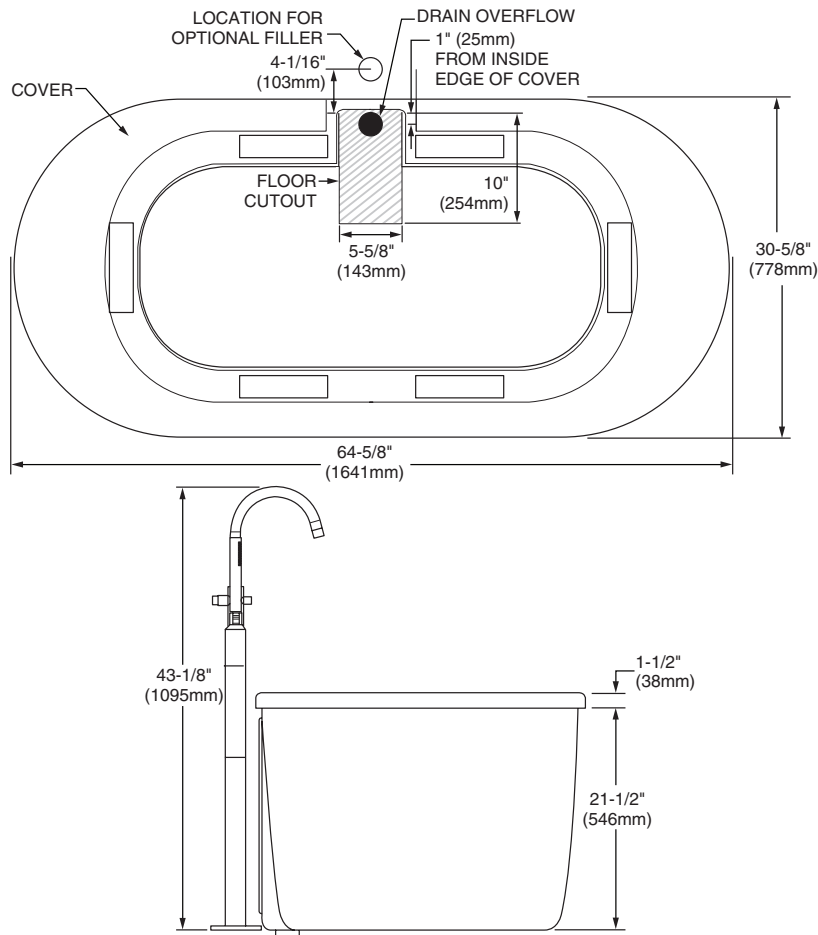

GENERAL SPECIFICATIONS FOR 2764 FREE STANDING BATH	
INSTALLED SIZE	66 x 32 x 23 in. (TUB ONLY) (1676 x 813 x 584mm)
WEIGHT	120 Lbs. (54 Kg.)
WEIGHT w/WATER	600 Lbs. (270 Kg.)
GAL. TO OVERFLOW	58 Gal. (220 L)
BATHING WELL AT SUMP	47-1/4 x 20-1/2 In. (1200 x 521mm)
BATHING WELL AT RIM	56-1/4 x 23-1/4 In. (1429 x 591mm)
WATER DEPTH TO OVERFLOW	14-5/8 In. (371mm)
FLOOR LOADING (PROJECTED AREA)	79 Lbs./Sq.Ft. (386 Kgs./Sq.m)

**NOTES:**

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHTUB FOR ADDITIONAL INFORMATION.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.