



CHAMPION® PRO
RIGHT HEIGHT® ROUND FRONT TOILET

❑ 211BA.004

- Features **Champion® Flushing System**
- Vitreous china
- Low consumption (1.6 gpf/6.0 Lpf) toilet
- Trade exclusive tank
- PowerWash® rim scrubs bowl with each flush
- Robust metal trip lever & metal shank fill valve
- Includes EZ-Install tools w/color match bowl caps
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- 4" piston-action Accelerator™ flush valve
- Fully-glazed 2-3/8" trapway
- 16-1/2" rim height for accessible applications
- 12" (305mm) rough-in
- Generous 9" x 8" water surface area
- Chrome finish trip lever is supplied
- 1,000g MaP Score** at 1.6gpf
- 10 year warranty

❑ 211BA.005 Same as above except with trip lever on right hand side

❑ 3195B.101 Right Height® Round Front Bowl

❑ 4225A.004 Tank

Nominal Dimensions:

718 x 483 x 785mm (28-1/4" x 19" x 30-7/8")

Fixture only, seat and supply sold separately

Alternative Tank Configurations Available:

- ❑ 4225A.064 Tank complete with tank cover locking device
- ❑ 4225A.005 Tank complete with trip lever located on right side

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Gauley Associates Ltd. and Koeller and Company.

To Be Specified:

- ❑ Color: White Bone Linen Black
- ❑ Seat: #5330.010 Round Front Champion® Slow Close solid plastic seat and cover
- ❑ Supply with stop:

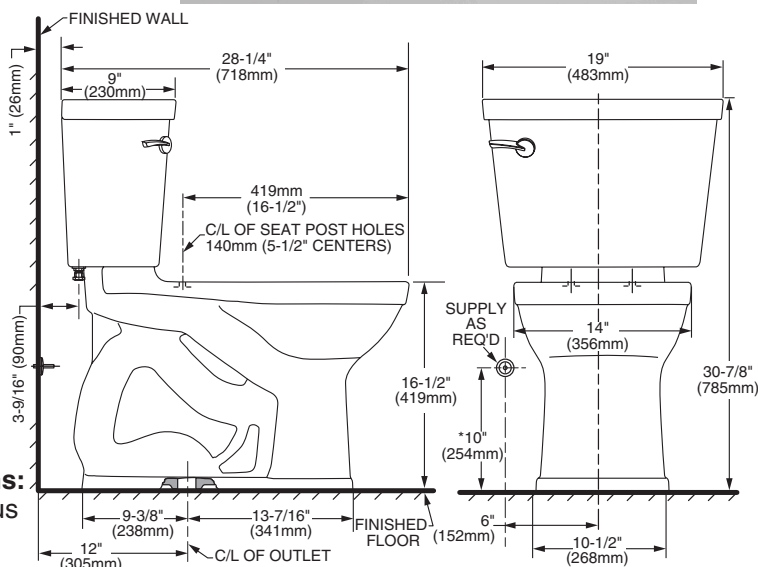

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

