

5-Year Limited Warranty on Heat Exchanger/5-Year Parts Warranty*

Designed specifically for heavy-duty commercial applications. Fully modulating, gas-fired, tankless, water heaters with sealed combustion (optional) and power vented flue. Can be installed either indoors or outdoors. Capable of supplying hot water for domestic hot water systems (directly or indirectly) using water storage tanks, recirculations systems, hydronic heating systems, radiant floor heating systems, and/or combined domestic & heating applications (local codes dictate proper compliance).

FEATURES

- **Primary Heat Exchanger is Constructed of HRS35 Commercial-Grade Copper** - Stronger than standard copper and more resilient against erosion
- **Continuous Maximum Flow Rates up to 14.5 GPM**
- **Easy-Link Up to 4 Units**
 - No additional parts or accessories needed
- **Combined Indoor/Outdoor Models**
- **Available in Natural Gas or Propane (LP)**
- **ASME Models Available**
- **Low NOx Emissions**
- **Complies with Lead Plumbing Law**
- **Safety Features:**
 - Built in Freeze Protection
 - Manual Reset Hi Limit (Set at 194°F)
 - Overheat Cutoff Fuse
 - Inlet, Outlet & Mixing Thermistors for Constant Temperature Monitoring
 - Air Fuel Ratio Rod
 - GFI, Fuse & Surge Absorber
 - Flame Sensor
- **Venting and Combustion**
 - 5" Category III Stainless Steel
 - Vertical or Horizontal Installation
 - 50' Max Length, 5 elbows max (90° elbows = 5' equivalent length)
 - Power Vent
 - Electronic Ignition - No Pilot Light
 - 5" Combustion Air Intake (with optional kit)
- **Optional Accessories**
 - Multi-Unit Controller
 - Remote Temperature Controller
 - Direct Vent Conversion Kit
 - Pipe Cover
 - Vent Cap
 - Backflow Preventor



GT-910-NIE
GT-910-PIE
AGT-910-NIE
AGT910-PIE



HLW
For supplying
potable hot
water
ASME model
ONLY

ANSI Z21.10.3 CSA 4.3

*For complete warranty information consult the written warranty of American Water Heaters found at www.americanwaterheater.com, or call (877) 737-2840.

Heavy-Duty Commercial Gas Tankless Water Heaters

MODEL NUMBER	FUEL TYPE	GAS CONSUMPTION INPUT		THERMAL EFFICIENCY	INLET GAS PRESSURE		GPM**	DIMENSIONS IN INCHES			VOLT	AMP	FLUE***	INTAKE (OPTIONAL)	HOT/COLD GAS CONN.	APPROX. SHIPPING WEIGHT (LBS)
		MINIMUM BTU/H	MAXIMUM BTU/H		MINIMUM W.C.	MAXIMUM W.C.		HEIGHT	WIDTH	DEPTH						
GT-910-NIE	Natural	15,000	380,000	80%	5.0	10.5	0.5 - 14.5	25-3/10	24-4/5	11-4/5	120	1.48	5" O.D.	5" O.D.	1" NPT	113
GT-910-PIE	Propane	15,000	380,000	82%	8.0	14.0	0.5 - 14.5	25-3/10	24-4/5	11-4/5	120	1.48	5" O.D.	5" O.D.	1" NPT	113
AGT-910-NIE*	Natural	15,000	380,000	80%	5.0	10.5	0.5 - 14.5	25-3/10	24-4/5	11-4/5	120	1.48	5" O.D.	5" O.D.	1" NPT	113
AGT-910-PIE*	Propane	15,000	380,000	82%	8.0	14.0	0.5 - 14.5	25-3/10	24-4/5	11-4/5	120	1.48	5" O.D.	5" O.D.	1" NPT	113



All dimensions in inches.

* ASME models

**Current numbers based on factory testing, 0.4 GPM required for continuous fire after initial ignition.


***Category III required

15 - 150 psi water pressure. Pressure only relief valve requires (Min. 380,000 BTUs. 150 PSI). Min 40 PSI or above recommended for maximum flow.

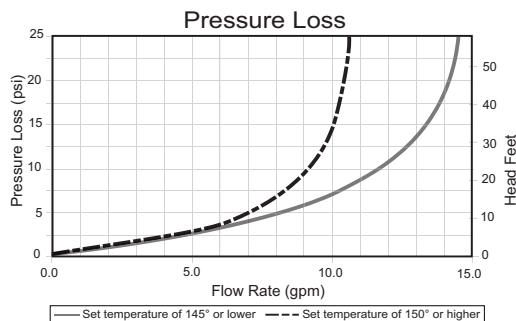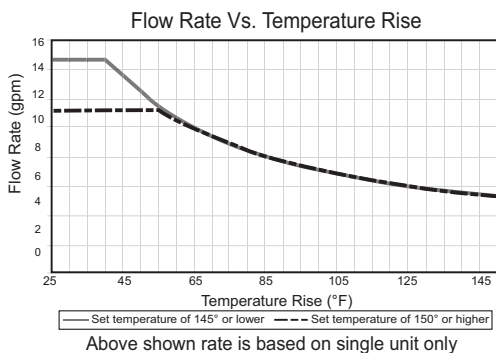

CLEARANCES:

INDOOR: Top 12", Bottom 12", Front 24", Back 0.5", Sides 2"
OUTDOOR: Top 36", Bottom 12", Front 24", Back 0.5", Sides 2"

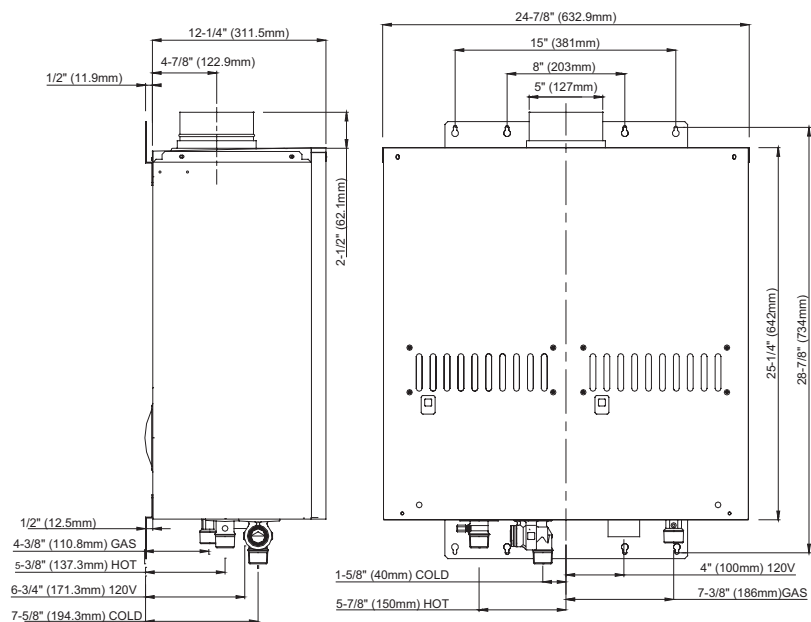

Specification

Water heater(s) shall be Model _____ as manufactured by American Water Heaters. The water heater(s) shall be a copper coil integral fin and tube construction with quick release brass or bronze waterways. Heater(s) will be factory assembled and tested. The heater shall be vented with 4" Stainless steel Category III vent pipe a distance not to exceed 50' (equivalent) feet terminating vertically or horizontally as prescribed. Intake air with optional direct vent kit may be of such materials as PVC not to exceed a total of 50' (equivalent). The heater(s) shall be controlled by on board solid state printed circuit board monitoring incoming and outgoing temperatures with factory-installed thermistors, sensing and controlling flow rate to set point temperature with control both air and gas mixture inputs to maintain thermal combustion efficiency. Unit also consists of ground fault interrupter, inline fusing, spark ignition and sensor system, aluminized stainless steel burners, air-fuel ratio rod, Hi limit switch, modulating and proportional gas valves, freeze protection sensor and heating block and overhead cutoff fuses. The water heater(s) shall be CSA listed, exceeds the energy efficiency requirements of ASHRAE 90.1b-1992 and complies with SCAQMD Rule 1146.2 and other Air Quality Management Districts with similar requirements for low NOx emissions.

Distributed By:

Order Entry and Sales
 500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 4808 (Mailing)
 Johnson City, TN 37602-4808
 (800) 937-1037
 FAX (800) 581-7224

Warranty and Service
 500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 1597 (Mailing)
 Johnson City, TN 37605-1597
 (877) 737-2840