


6-Year Limited Tank/Parts Warranty*

American® Ultra-High Recovery units offer high performance for applications requiring highest hot water outputs.

- **Aluminized Steel Multiport Burner**
For even flame distribution, quiet operation and high-efficiency combustion.
- **Combination Thermostat/ECO**
With factory-preset pressure regulator and built-in millivolt-powered energy cut-off for overheat protection.
- **Diffuser Dip Tube**
Carries cold inlet water deep into the tank to minimize temperature dilution of hot water, and helps reduce scale buildup to extend tank life.
- **Fused Ceramic Shield**
A tough, thick, durable coat of blue ceramic is fused to the tank's interior surfaces at 1600°F, forming a corrosion-resistant lining for years of dependable protection and use.
- **Non-CFC Foam Insulation**
The tank is surrounded by a thick coat of non-CFC polyurethane foam to trap heat inside the tank, saving energy.
- **Side T&P Valve**
- **1/2" Gas Connection**
- **Anode Rod**
Top-mounted, heavy-duty anode for added tank protection, extending the life of the tank.
- **Code Approvals**
CSA International certified, CEC and NAECA requirements. All models are certified at 300 PSI test pressure and 150 PSI working pressure.
- **Drain Valve**
Durable, brass drain valve.
- **Low NOx**
Meets NOx emissions of less than 40 ng/j.



*For complete warranty information consult the written warranty of American Water Heaters found at www.americanwaterheater.com, or call (800) 999-9515.

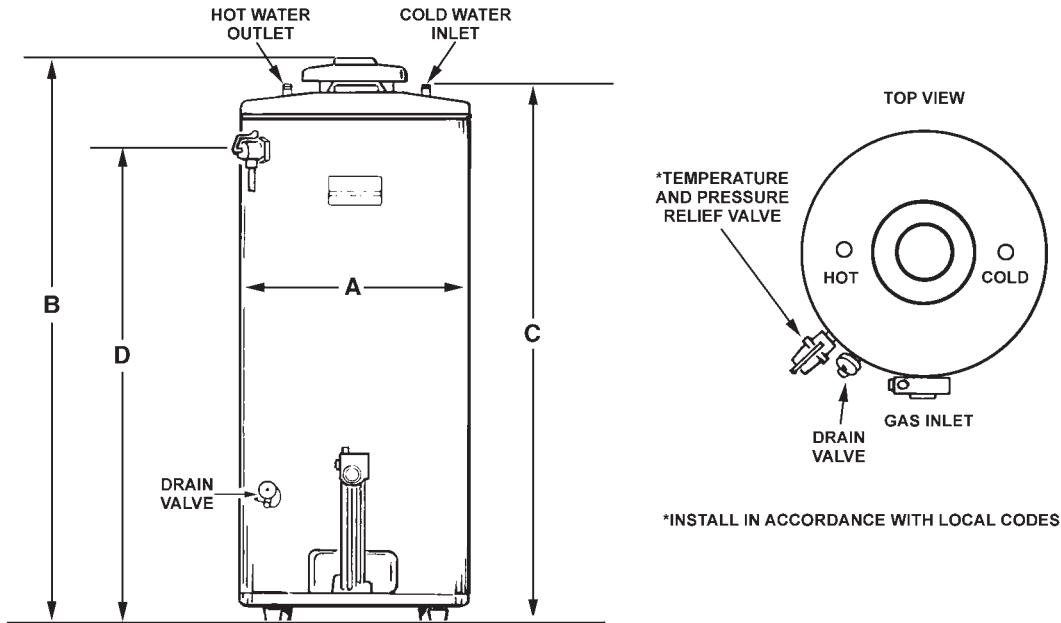

MODEL NUMBER	GALLON CAPACITY	INPUT BTU PER HOUR		GPH RECOVERY 90°F RISE		VENT DIAMETER	ENERGY FACTOR (EF)	JACKET DIAMETER A	TOP OF VENT B	TOP OF HEATER C	SIDE T&P D	APPROXIMATE SHIPPING WEIGHT (LBS)
		NAT.	LP	NAT.	LP							
*G62-75T75-4NOV	74	75,100	75,100	81	81	4	NA	26-1/2	61-1/8	58-1/2	50-1/4	275
G62-100T77-4NOV	98	75,100	75,100	81	81	4	NA	27-3/4	68-1/2	65	57-3/8	350

For propane, substitute "P" for "N" or "NO" in model numbers. Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. *74 Gallon available with 12-year tank, 12-year parts warranty; change "G62" to "G122" when ordering.

Specification

Residential gas water heater(s) shall be models _____ as manufactured by American Water Heaters, or an approved equal, and shall have a _____-year tank warranty and a _____-year parts warranty, when installed in a residential application. Heater(s) shall have a storage capacity of _____ gallons and shall have a rated input of _____ BTUs, and shall be designed, tested and listed with CSA International in accordance with the latest edition of ANSI Z21.10.1 or .3 - CSA4.1 or .3 standard. Heaters shall meet the requirements of the Federal "National Appliance Energy Conservation Act of 1987." The interior of the storage tank shall be lined with a Fused Ceramic Shield lining, fused to the tank at 1600° F, forming a corrosion-resistant lining; polymer linings are not acceptable. Each tank shall be furnished with an internal anode for cathodic protection. The unit must be equipped with a combination gas control thermostat and non-reset type ECO. A durable, brass drain valve shall be provided on the front of each unit. The tank shall be totally encased in a steel jacket, painted and insulated with a non-CFC foam to reduce standby heat loss. The tank must be design certified for 300 PSI test pressure and 150 working pressure. 100 gallon model shall have a minimum 2.75" diameter boiler-type cleanout/inspection port.

Distributed By:

Order Entry and Sales
 500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 4808 (Mailing)
 Johnson City, TN 37602-4808
 (800) 937-1037
 FAX (800) 581-7224

Warranty and Service
 500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 1597 (Mailing)
 Johnson City, TN 37605-1597
 (800) 999-9515
 FAX (800) 999-5210