

# SUBMITTAL DATA SHEET

Sump, Sewage, & Effluent Pumps  
DuraMAC™ | Guardian




## 5025PTSP Sump Pump



See Pumps & Accessories  
Price List for Limited  
Warranty details.

With a tough thermoplastic construction, the 5025PTSP can handle up to 30 gallons per minute (GPM).

### Performance Curve

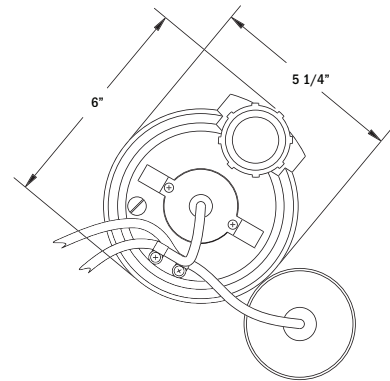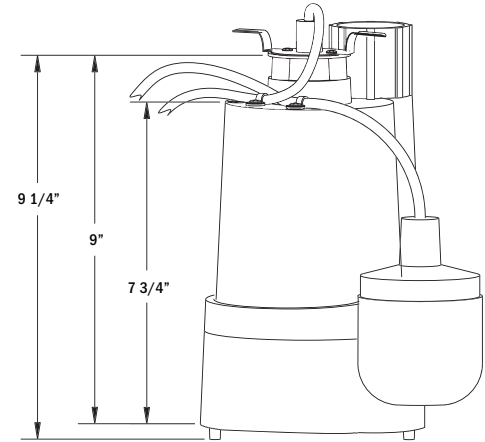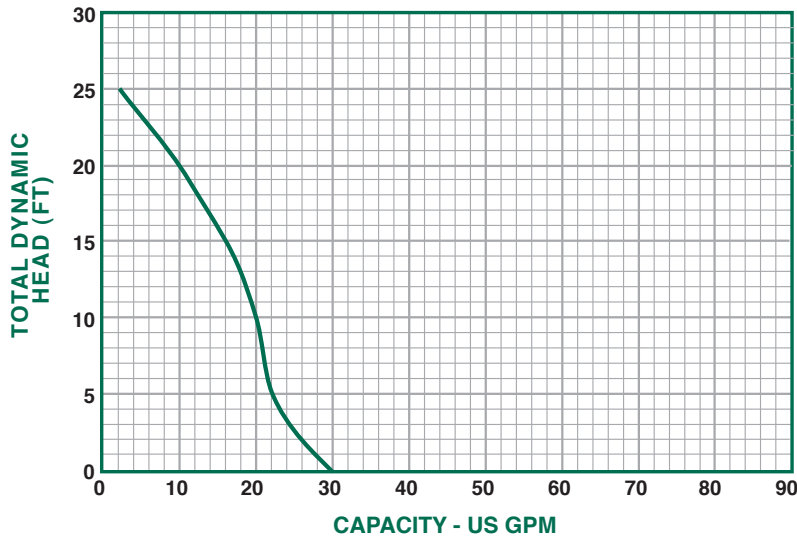

### Performance

| Model    | Gallons per Minute in Feet |    |    |    |    |    |
|----------|----------------------------|----|----|----|----|----|
|          | 0                          | 5  | 10 | 15 | 20 | 25 |
| 5025PTSP | 30                         | 22 | 20 | 16 | 9  | 2  |

### Specifications

| Model No. | HP  | Volts | Hz | Amps | Construction  | Discharge Size   | Cord Length | Solids Handling | RPM  | Phase | Wt. |
|-----------|-----|-------|----|------|---------------|------------------|-------------|-----------------|------|-------|-----|
| 5025PTSP  | 1/4 | 120   | 60 | 3.8  | Thermoplastic | 1 1/4" or 1 1/2" | 10'         | 1/8"            | 3450 | 1     | 9   |

### SUBMITTAL INFORMATION

- Split Capacitor Motor - 1/4 HP continuous duty, thermal protected
- Lifts water up to 25' of vertical height
- 10' power cord, 25' cords are available for an additional charge
- Large 1 1/4" or 1 1/2" discharge for high capacity pumping
- Clog resistant impeller
- Vertical float switch



**NO-LEAD:** The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
P.O. Box 508  
Dubuque, IA 52004-0508

**Toll Free:** 1-800-292-2737  
**Fax:** 1-800-832-9296  
**Hours:** 7:00 a.m. - 5:00 p.m., CST

[sales@aymcdonald.com](mailto:sales@aymcdonald.com)  
[www.aymcdonald.com](http://www.aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**