
SUBMITTAL DATA SHEET


Sump, Sewage, & Effluent Pumps DuraMAC™ | Guardian

5000PVSPBU Sump Pump Backup





Performance Curve

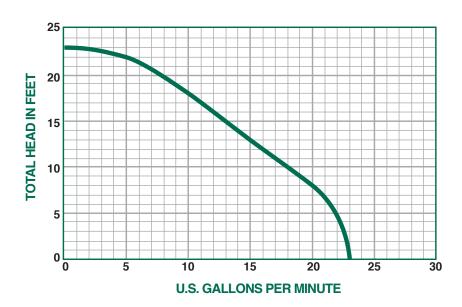

Performance

Model	Gallons per Minute in Feet								
	0	5	10	15	20				
5000PVSPBU	23	22	18	13	8				

Specifications

Model No.	Volts	Hz	Amps	Construction	Discharge Size	Cord Length	Solids Handling	Phase	Wt.
5000PVSPBU	12V DC	60	12	Thermoplastic	1 1/4" or 1 1/2"	10'	1/8"	1	14

SUBMITTAL INFORMATION

- 5000PVSPBU 12V DC Thermoplastic sump pump
- Vertical switch and 10' Cord
- 1 1/4" or 1 1/2" Discharge (pump discharge 1 1/4", w/check valve 1 1/2")

- Alarm/Control unit with fuse and mute feature
- Thermoplastic battery box

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co. P.O. Box 508

Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737 Fax: 1-800-832-9296

sales@aymcdonald.com www.aymcdonald.com

Hours: 7:00 a.m. - 5:00 p.m., CST

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

3-2020