


SUBMITTAL DATA SHEET

23000 Series
 4" No-Lead Domestic Stainless Steel Submersible Pumps
V - 7 GPM



A.Y. McDonald offers a full line of stainless steel submersible pumps built for years of trouble free operation, with high-efficiency impellers and diffusers. These submersibles offer peak capacity performance in 5, 7, 10, 15, 20, and 25 gallons per minute (GPM). Other features include stainless steel discharge head with a built-in check valve, and stainless steel shaft and coupling.

All Stainless Steel Pumps come with a 1 1/4" discharge and sizes range from 1/3 to 2 horsepower (HP). Two wire models up to 1 1/2 and three wire models up to 2 horsepower (HP).

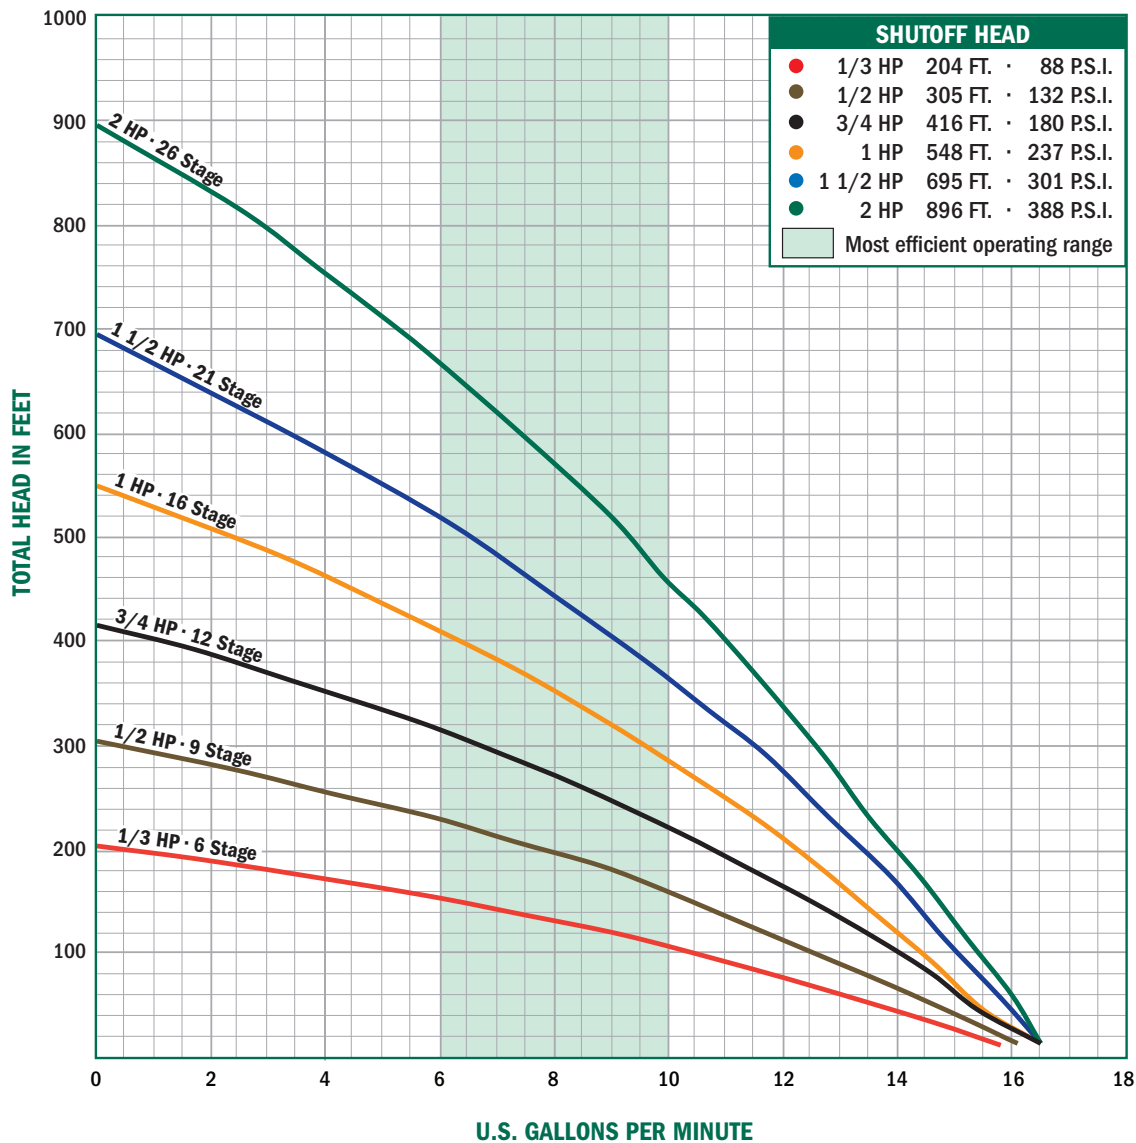

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 P.O. Box 508
 Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
 www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

23000 Series 4" No-Lead Domestic Stainless Steel Submersible Pumps V - 7 GPM



Two Wire Single Phase


Model No.	HP	Stages	Volt	A	B	WT.
23030V2A*	1/3	6	115	11.1"	9.53"	24
23030V2*	1/3	6	230	11.1"	9.53"	25
23050V2A	1/2	9	115	13.48"	9.53"	26
23050V2	1/2	9	230	13.48"	9.53"	26
23075V2	3/4	12	230	15.92"	10.66"	30
23100V2	1	16	230	19.11"	11.75"	34
23150V2	1 1/2	21	230	23.58"	15.12"	46

Three Wire** Single Phase

Model No.	HP	Stages	Volt	A	B	WT.
23030V3A*	1/3	6	115	11.1"	9.53"	25
23030V3*	1/3	6	230	11.1"	9.53"	25
23050V3A	1/2	9	115	13.48"	9.53"	26
23050V3	1/2	9	230	13.48"	9.53"	26
23075V3	3/4	12	230	15.92"	10.66"	30
23100V3	1	16	230	19.11"	11.75"	35
23150V3	1 1/2	21	230	23.58"	13.62"	41
23200V3	2	26	230	28.34"	15.12"	49

4" Stainless Steel Pump Ends

Model No.	HP	WT.
23030V	1/3	9
23050V	1/2	10
23075V	3/4	13
23100V	1	11
23150V	1 1/2	16
23200V	2	18

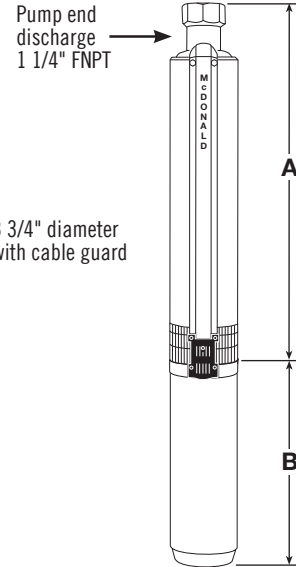

* All one-third horsepower pumps are furnished with one-half horsepower motors (and control boxes where applicable).
 ** All three wire pumps are available in three phase by selecting pump end and appropriate motor and starter kit.

Output - in Gallons Per Minute (Depth to Water)

HP	PSI	1/3 HP								1/2 HP								3/4 HP								1 HP								1 1/2 HP								2 HP																																																		
		25'	50'	75'	100'	125'	150'	175'	200'	25'	50'	75'	100'	125'	150'	175'	200'	25'	50'	75'	100'	125'	150'	175'	200'	25'	50'	75'	100'	125'	150'	175'	200'	25'	50'	75'	100'	125'	150'	175'	200'	25'	50'	75'	100'	125'	150'	175'	200'	25'	50'	75'	100'	125'	150'	175'	200'																																			
1/3	0	15.1	13.7	12.2	10.5	8.6	6.4	3.8	0	15.6	14.6	13.6	12.6	11.5	10.4	9.2	7.8	0	16.1	15.5	14.8	14.0	13.3	12.5	11.6	10.8	0	16.1	15.5	15.0	14.4	13.9	13.3	12.8	12.2	11.6	11.0	10.3	9.6	8.9	8.1	7.2	6.3	5.4	4.5	3.5	0	15.9	15.1	14.3	13.4	12.4	11.4	10.4	9.2	7.9	6.5	5.0	0	16.1	15.4	14.7	14.0	13.3	12.6	11.8	11.0	10.2	9.3	8.4	7.4	6.4	5.3	4.1	2.9	1.5	0	15.1	14.5	13.8	13.0	12.3	11.5	10.7	9.8	8.9	8.0	7.0	6.0	4.9	3.7	2.3
1/3	30	10.9	9.0	6.9	4.4	1.3	30	12.8	11.8	10.7	9.5	8.2	6.7	5.0	3.1	30	14.2	13.4	12.7	11.8	11.0	10.1	9.1	8.1	7.0	5.8	4.5	3.1	1.5	30	14.5	14.0	13.5	12.9	12.3	11.8	11.1	10.5	9.8	9.1	8.3	7.4	6.6	5.6	4.7	3.7	2.7	30	14.4	13.5	12.9	12.4	11.8	11.2	10.5	9.9	9.1	8.3	7.5	6.6	5.7	4.7	3.8	2.8	30	14.4	13.5	12.6	11.6	10.5	9.4	8.1	6.7	5.2	3.6	1.9	30	14.8	14.1	13.4	12.7	11.9	11.1	10.3	9.4	8.5	7.6	6.5	5.5	4.3	3.1	1.7
1/3	40	9.2	7.1	4.6	1.6	40	9.2	7.1	4.6	1.6	40	11.9	10.8	9.6	8.3	6.8	5.1	3.1	40	13.5	12.7	11.9	11.0	10.1	9.2	8.2	7.1	5.9	4.6	3.2	1.7	40	13.5	13.0	12.4	11.8	11.2	10.6	9.9	9.2	8.4	7.6	6.7	5.8	4.8	3.8	2.8	40	14.0	13.5	12.9	12.4	11.8	11.2	10.5	9.9	9.1	8.3	7.5	6.6	5.7	4.7	3.8	2.8	40	14.4	13.5	12.6	11.6	10.5	9.4	8.1	6.7	5.2	3.6	1.9	40	14.8	14.1	13.4	12.7	11.9	11.1	10.3	9.4	8.5	7.6	6.5	5.5	4.3	3.1	1.7
1/3	50	7.2	4.8	1.9	50	7.2	4.8	1.9	50	10.9	9.7	8.4	6.9	5.2	3.3	50	12.8	12.0	11.1	10.2	9.3	8.2	7.2	6.0	4.7	3.3	1.8	50	13.5	13.0	12.4	11.8	11.2	10.6	9.9	9.2	8.4	7.6	6.7	5.8	4.8	3.8	2.8	50	14.0	13.1	12.1	11.1	10.0	8.8	7.5	6.0	4.5	2.8	50	14.4	13.6	12.7	11.7	10.6	9.5	8.2	6.8	5.3	3.7	2.0	50	14.5	13.8	13.1	12.3	11.5	10.7	9.9	9.0	8.1	7.1	6.1	4.9	3.8	2.4											
1/3	60	7.2	4.8	1.9	60	7.2	4.8	1.9	60	9.8	8.5	7.0	5.4	3.4	1.3	60	12.0	11.2	10.3	9.3	8.3	7.2	6.1	4.8	3.4	1.9	60	13.0	12.5	11.9	11.3	10.6	9.9	9.2	8.4	7.6	6.7	5.8	4.8	3.8	2.8	60	13.6	12.7	11.7	10.6	9.5	8.2	6.8	5.3	3.7	2.0	60	14.2	13.5	12.7	12.0	11.2	10.3	9.5	8.6	7.6	6.6	5.6	4.4	3.2	1.8																									

FRICITION LOSSES IN RISER PIPE
HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: