BT0408.02 SPECIFICATIONS

halo·2 blu·stone[™] freestanding bathtub

FEATURES:

- Freestanding, blu•stone[™] bathtub
- Streamlined, high profile one piece design
- 71" (1800mm) L x 31½" (800mm) W x 21¾" (550mm) H
- Includes integral slot overflow & matching blu·stone™ waste cover
- Made of blu·stone[™] providing the look and feel of natural stone
- Stronger and more durable than acrylic
- Non-porous, stain resistant surface that does not require sealing
- Does not promote bacteria, mold or fungi
- Varying slopes allow bather to sit upright or extend back
- Tailpiece not included (Blu recommends BTWaste.RN or BTWasteCI.RN)

SPECIFICATIONS:

45¾" (1160mm) x
201⁄2" (520mm)*
69½" (1760mm) x
30" (760mm)*
21⁄4" (60mm)*
14" (356mm)
68°/54°*
87G (330L)*
385lbs (175kg)*
Should be 70% of water
capacity of tub or greater
Five Year Warranty (Resid
One Year Warranty (Com
blu∙stone™

Shipping Weight: Shipping Dimensions: capacity of tub or greater Five Year Warranty (Residential use) One Year Warranty (Commercial use) blu·stone[™] 518lbs (235kg)* (LWH) 73½" x 34¼" x 22¾" (1870mm x 870mm x 580mm)*

COLORS/FINISHES:

White Matte or Gloss as standard Available in a range of blu•stone[™] colors + finishes (special order)

ACCESSORIES (sold separately):

- BTWaste.RN or BTWasteCI.RN Island tub drain for easy installation

INSTALLATION NOTES:

Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1600 lbs (725 kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations


CODES / STANDARDS APPLICABLE:


- Meets or exceeds ANSI / ASME standard CSA B45.5.11 / IAPMO Z124
- IAPMO / ANSI Z124.8
- CSA





*Approximate measurements for comparison only. Note: These dimensions and specifications are subject to change without notice.





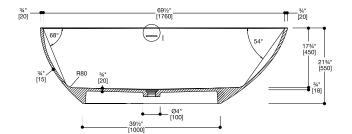





2020-12

[50]