BT0305N15 SPECIFICATIONS

azure·3 blu·stone™ freestanding bathtub with end drain

FEATURES:
- Freestanding, blu·stone™ bathtub with end drain
- Streamlined, high profile one piece design
- 59" (1500mm) L x 27½" (700mm) W x 19¾" (500mm) H
- Includes integral slot overflow & matching blu·stone™ waste cover
- Suitable for left or right drain installation
- Made of blu·stone™ providing the look and feel of natural stone
- Stronger and more durable than acrylic
- Non-porous, stain resistant surface that does not require sealing
- Does not promote bacteria, mold or fungi
- Tailpiece not included (Blu recommends BTWaste.RN or BTWasteCI.RN)

SPECIFICATIONS:

Basin Area:	45¼" (1150mm) x 14¾" (377mm)*
Top Area:	56½" (1437mm) x 26¼" (664mm)*
To Overflow:	2¼" (60mm)*
Slope of Backrest:	60°*
Water Depth:	15¼" (390mm)*
Capacity:	65G (247L)*
Weight:	198lbs (90kg)*
Hot water supply req'd:	Should be 70% of water capacity of tub or greater
Warranty:	Five Year Warranty (Residential use) One Year Warranty (Commercial use)
Material:	blu·stone™
Shipping Weight:	282lbs (128kg)*
Shipping Dimensions	(LWH) 64" x 32½" x 28¼" (1623mm x 823mm x 719mm)*

FINISHES:
White Matte and Gloss finish as standard

ACCESSORIES (sold separately):
- BTWaste.RN or BTWasteCI.RN Island tub drain for easy installation

INSTALLATION NOTES:
Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1400 lbs (635kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations

CODES / STANDARDS APPLICABLE:
- Meets or exceeds ANSI / ASME standard CSA B45.5.11 / IAPMO Z124
- IAPMO / ANSI Z124.8
- CSA

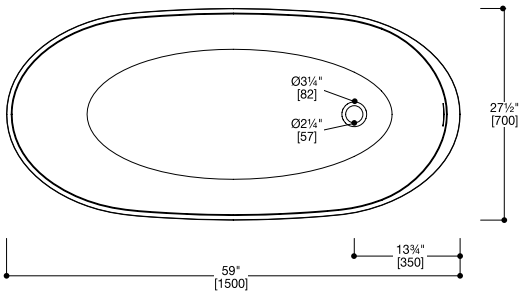

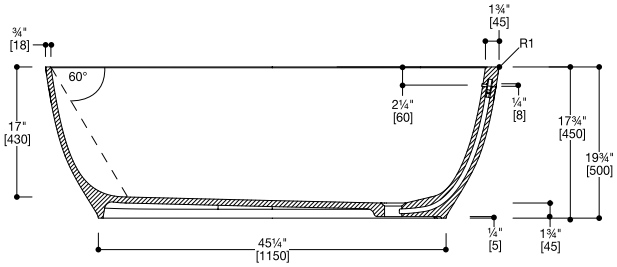





*Approximate measurements for comparison only.
Note: These dimensions and specifications are subject to change without notice.