

TE706 SPECIFICATIONS

recessed shower head

FEATURES:

- Modern, clean, contemporary design
- Durable, polished chrome or satin finish
- Stainless steel
- Includes recessed mounting bracket
- Both sides function simultaneously as standard and may be operated by a single outlet shower control (unit may also be plumbed on-site for single side functionality operated by two-way diverter valve TS922)

SPECIFICATIONS:

Warranty:	Lifetime Limited Warranty (Residential) One Year Warranty (Commercial)
Material:	Stainless steel
Spray Nozzles:	288
Flow Rate:	4.0 gpm @ 80 PSI
Dimension:	35¼" x 19½" (898mm x 498mm)*
Connection:	½"NPT
Shipping Weight:	67.5lbs (30.6kg)
Shipping dimensions:	42¼" x 26½" x 4¾" (1070mm x 670mm x 120mm)

FINISHES:




- Polished Chrome
- Satin (-S)

INSTALLATION:

Install this product according to the installation guide. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations.

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard A112.18.1 and CAN / CSA B125.1-05 requirements
- ASME A112.19.2
- IAPMO / UPC / cUPC
- California AB1953 compliant

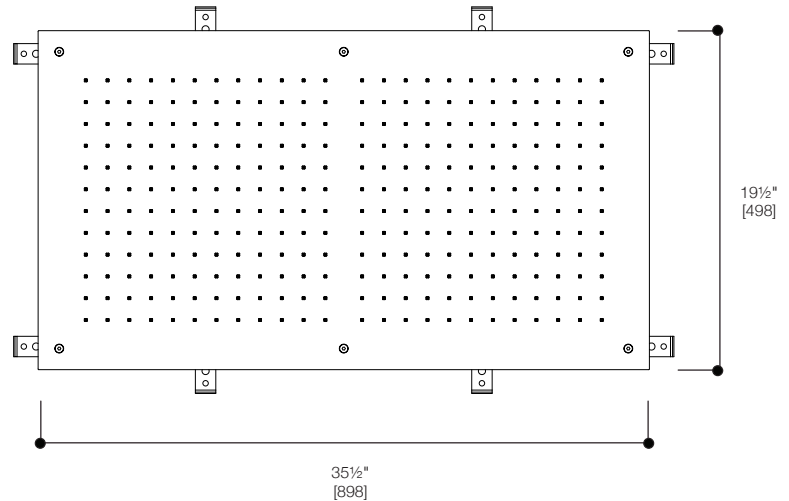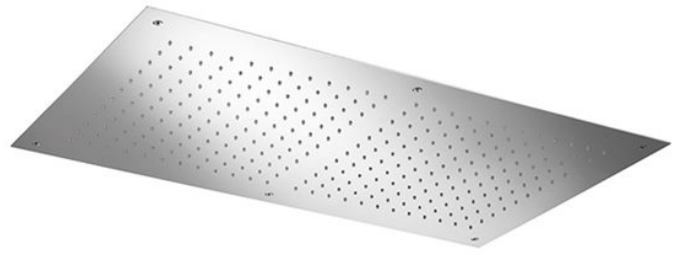

AB1953

*Approximate measurements for comparison only.
Note: These dimensions and specifications are subject to change without notice.