

# TS922.01 SPECIFICATIONS

## 3/4" thermostatic tub/shower rough-in valve with 2-way diverter

### FEATURES:

- Thermostatic rough-in valve with 2-way diverter
- Single-handle temperature control
- High-flow valving
- 3/4" NPT connections
- Integral service shut-offs with filter screens
- Crossflow prevention: temperature remains constant even if water pressure changes
- 2 ports, 2 functions: port 1 & port 2 can be operated individually
- Anti-scald safety stop, preset to 100°F / 38°C
- Set and maintain precise desired temperature
- Ceramic cartridge & thermostatic cartridge
- Solid brass construction
- Mounting tabs for easy installation



### SPECIFICATIONS:

Warranty:	Limited lifetime warranty (residential) One year warranty (commercial)
Material:	Solid cast brass
Valve size:	3/4" NPT
Flow rate:	12.5 gpm @ 60 PSI
Weight:	5 lbs (2.26 kg)*
Shipping dimensions:	(LWH) 7 3/4" x 8 1/4" x 6 1/4" (197mm x 210mm x 159mm)*

### REQUIRED:

- pure-2/opus-2 TSP922.01 valve trim (sold separately)

### ACCESSORIES (sold separately):


Extension kits available for deep in-wall installation, PT4401 for thermostatic handle + PT3403 for for diverter handle

### INSTALLATION

Install this product according to the installation guide. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial/state and local building codes and regulations.

### CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard A112.18.1 and CAN / CSA B125.1-05 requirements
- Listed with IAPMO bearing the UPC / cUPC mark
- Calgreen compliant

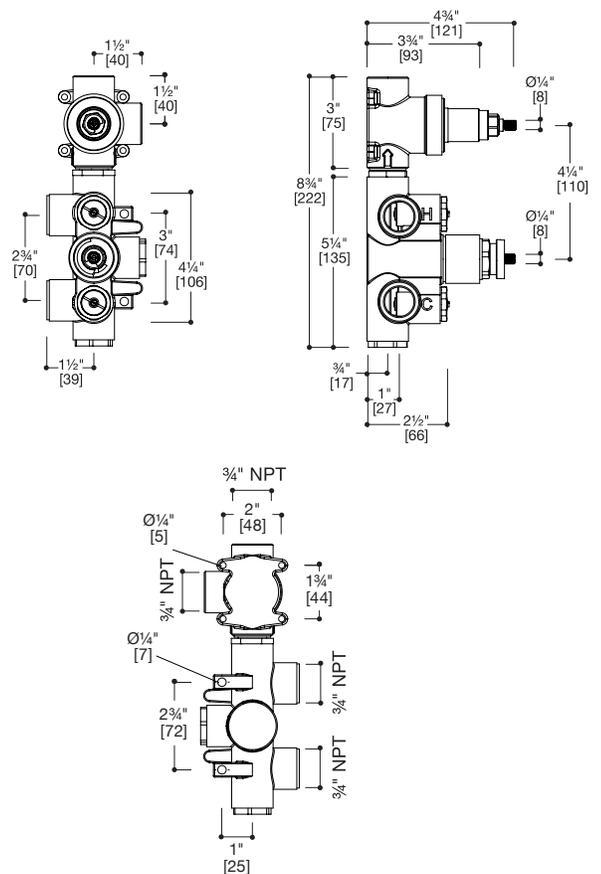

\*Approximate measurements for comparison only.  
Note: These dimensions and specifications are subject to change without notice.