

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

CS600 Copper Faucet Riser – One-Piece Riser w/ Shank Nut and Sweat Inlet

Use: For use in potable water distribution systems in accessible locations only.


Design Features:

- One-piece construction

Operating Specifications:

Temperature: 40° - 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.38" OD

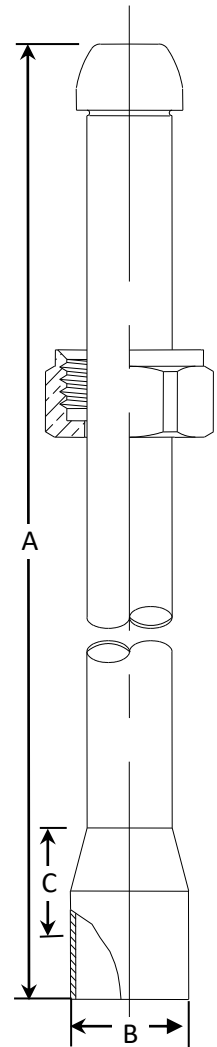

CONNECTOR MATERIAL SPECIFICATIONS

Tube	Copper
Shank Nut	Brass

PART DIMENSIONS (Inches)

Model	DIM. A	DIA. B (I.D.)	DIM. C
CS600	11.50	.630	.62

Part Listing:

- CS600 R 1/2" nom sweat x 3/8" OD tube x 11-1/2" length, rough finish
- CS600 RBT 1/2" nom sweat x 3/8" OD tube x 11-1/2" length, rough finish, plain label, bulk

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (including NSF/ANSI372 and NSF61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®