

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B8-**A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:


- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
-

Operating Specifications:

Temperature: 40°- 160° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

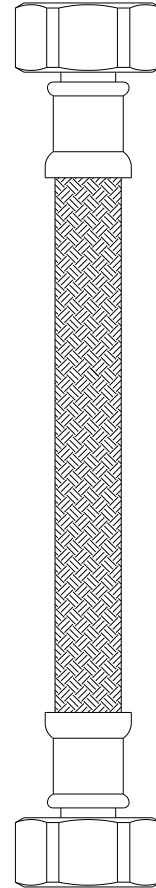

CONNECTOR MATERIAL SPECIFICATIONS

Inner Hose	<i>Reinforced PVC</i>
Braiding	<i>PVC coated yarn</i>
Barb	<i>Brass</i>
Ferrule	<i>Stainless steel</i>
Nut	<i>Brass, plated or polypropylene</i>
Washer	<i>Rubber</i>

Part Listing:


- | | | |
|--------------------------|----------|------------------------------------|
| <input type="checkbox"/> | B8-16A F | 1/2" FIP* x 1/2" FIP* x 16" length |
| <input type="checkbox"/> | B8-20A F | 1/2" FIP* x 1/2" FIP* x 20" length |
| <input type="checkbox"/> | B8-24A F | 1/2" FIP* x 1/2" FIP* x 24" length |
| <input type="checkbox"/> | B8-30A F | 1/2" FIP* x 1/2" FIP* x 30" length |
| <input type="checkbox"/> | B8-36A F | 1/2" FIP* x 1/2" FIP* x 36" length |
| <input type="checkbox"/> | B8-36MP | 1/2" FIP* x 1/2" MIP x 36" length |
| <input type="checkbox"/> | B8-48A F | 1/2" FIP* x 1/2" FIP* x 48" length |

*1/2" FIP also fits 7/16" rubber slip nut

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



B8-**A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

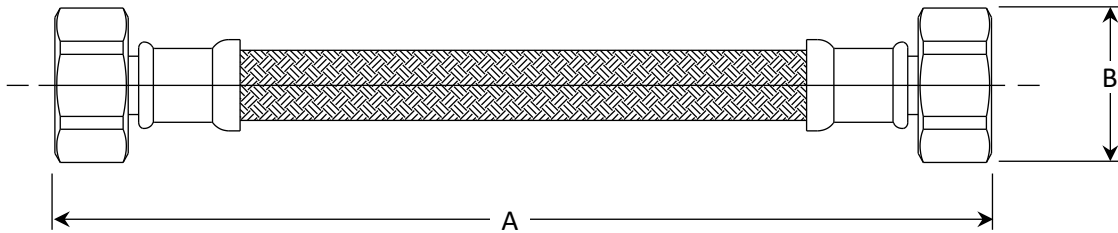

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
B8-16A	16.0 / 17.0	1.02
B8-20A	20.0 / 21.0	1.02
B8-24A	24.0 / 25.0	1.02
B8-30A	30.0 / 31.0	1.02
B8-36A	36.0 / 37.0	1.02
B8-36MP	36.0 / 37.0	1.02
B8-48A	48.0 / 49.0	1.02

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF 372 for Low-Lead Compliance
- IAPMO listed to NSF 61/9



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®