### For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

# BF1-\*\*A / BF3-\*\*A Speedi Plumb® PLUS Braided Faucet Connector - Flare Inlet

*Use:* For use in potable water distribution systems in accessible locations only.

#### **Design Features:**

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose provides added durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection



#### **Operating Specifications:**

**Temperature:** 40°-160° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tube Diameter:** 0.300" ID (0.550" OD)

CONNECTOR MATERIAL SPECIFICATIONS				
Inner Hose Reinforced PVC				
<b>Braiding</b> PVC coated yarn				
Barb	Brass			
Ferrule	rrule Stainless steel			
Nut	Brass, plated or polypropylene			
Washer	Rubber			

#### Part Listing:


Ш	BF1-12A F	3/8"	flare	x 1/	2"	FIP↑	x 12"	length
	BF1-16A F	3/8"	flare	x 1/	2"	FIP*	x 16"	length
	BF1-20A F	3/8"	flare	x 1/	2"	FIP*	x 20"	length
	BF3-20A F	1/2"	flare	x 1/	2"	FIP*	x 20"	length



©2019 Brasscraft Manufacturing Company

<sup>\*1/2&</sup>quot; FIP also fits 7/16" rubber slip nut

# BF1-\*\*A / BF3-\*\*A Speedi Plumb® PLUS Braided Faucet Connector - Flare Inlet

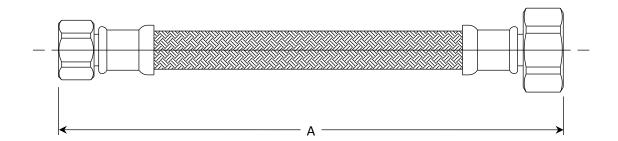

PART DIMENSIONS (Inches)				
Model	DIM. A			
BF1-12A	12.0 / 13.0			
BF1-16A	16.0 / 17.0			
BF1-20A	20.0 / 21.0			
BF3-20A	20.0 / 21.0			

### **Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF 372 for Low-Lead Compliance
- IAPMO listed to NSF 61/9



