

**For Residential and Commercial Applications**

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## BF1-\*\*A / BF3-\*\*A Speedi Plumb® PLUS Braided Faucet Connector - Flare Inlet

**Use:** For use in potable water distribution systems in accessible locations only.

**Design Features:**


- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- **No Lead**

**Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tube Diameter:** 0.300" ID (0.550" OD)

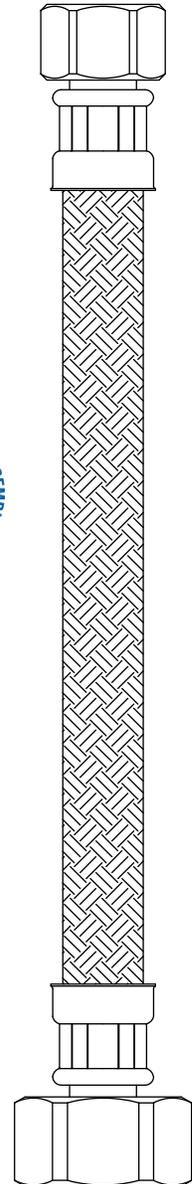

<b>MATERIAL SPECIFICATIONS</b>	
<b>Inner Hose</b>	Reinforced PVC
<b>Braiding</b>	PVC coated polyester yarn
<b>Barb</b>	Brass
<b>Ferrule</b>	Zinc-plated steel
<b>Nut</b>	Brass, chrome plated
<b>Washer</b>	Rubber

**Part Listing:**


- BF1-12A F                    3/8" flare x 1/2" FIP\* x 12" length
- BF1-16A F                    3/8" flare x 1/2" FIP\* x 16" length
- BF1-20A F                    3/8" flare x 1/2" FIP\* x 20" length
- BF3-20A F                    1/2" flare x 1/2" FIP\* x 20" length

\*1/2" FIP also fits 7/16" rubber slip nut

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*



# BF1-\*\*A / BF3-\*\*A Speedi Plumb® PLUS Braided Faucet Connector - Flare Inlet

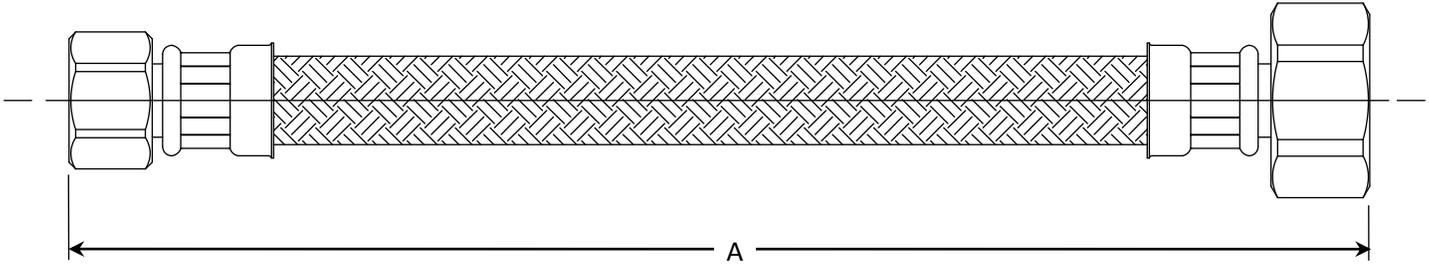

<b>PART DIMENSIONS (Inches)</b>	
<b>Model</b>	<b>DIM. A</b>
BF1-12A	12.0 / 13.0
BF1-16A	16.0 / 17.0
BF1-20A	20.0 / 21.0
BF3-20A	20.0 / 21.0

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*

**BrassCraft®**