

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

BL3-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:


- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
-

Operating Specifications:

Temperature: 40°- 160° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.440" ID (0.630" OD)

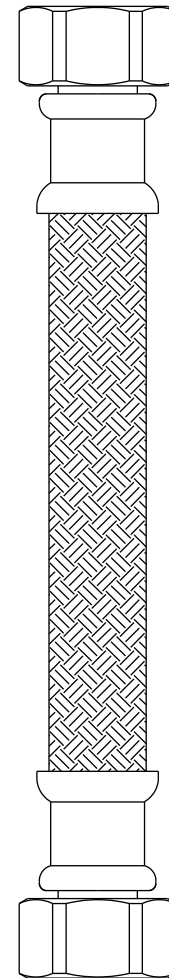

CONNECTOR MATERIAL SPECIFICATIONS


Inner Hose	<i>Reinforced PVC</i>
Braiding	<i>PVC coated yarn</i>
Barb	<i>Brass</i>
Ferrule	<i>Stainless steel</i>
Washer	<i>Rubber</i>
Compression Nut	<i>Brass, plated</i>

Part Listing:

- BL3-15DW 1/2" compression x 1/2" compression x 15" length, bulk
- BL3-48DW F 1/2" compression x 1/2" compression x 48" length, flag label
- BL3-60DW F 1/2" compression x 1/2" compression x 60" length, flag label
- BL3-72DW F 1/2" compression x 1/2" compression x 72" length, flag label

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BL3-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

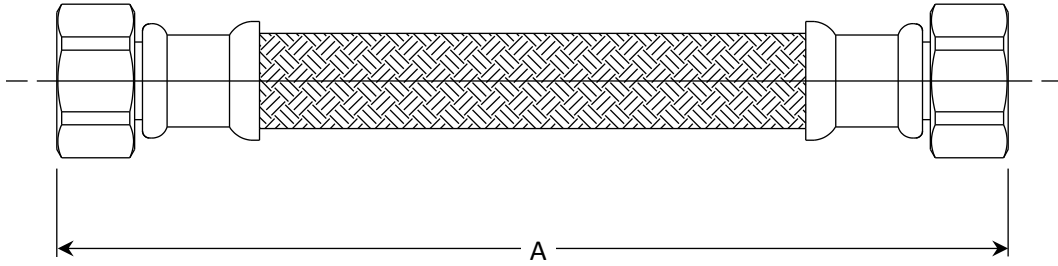

PART DIMENSIONS (Inches)	
Model	DIM. A
BL3-15DW	15.0 / 16.0
BL3-48DW	48.0 / 49.0

PART DIMENSIONS (Inches)	
Model	DIM. A
BL3-60DW	60.0 / 61.0
BL3-72DW	72.0 / 73.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF 372 for Low-Lead Compliance
- IAPMO listed to NSF 61/9



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®