For Residential and Commercial Applications				
Job Name		Engineer / Architect		
Job Location		Wholesaler		
Submittal Date		Contractor		

# **BL3** Speedi Plumb<sup>®</sup> PLUS Braided Toilet Connectors - Compression Inlet for Low Boy Toilets

*Use:* For use in potable water distribution systems in accessible locations only.

#### **Design Features:**

- Engineered polymer braided fibers bend freely without kinking or crimping
- **EPDM inner hose** ensures durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection
- Long wing nuts allow for quick connection and ensure dependable thread engagement
- 8-sided pneumatic crimp provides greater dependability for realible nut-to-hose connections
- . Ø No Lead

### **Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F

*Pressure:* 125 PSI maximum


**Tubing Diameter:** 0.450" ID (0.660" OD)

	MATERIAL SPECIFICATIONS
Inner Hose	EPDM
Braiding	PVC coated polyester yarn
Barb	Brass
Ferrule	Zinc-plated steel
Nut	Polypropylene
Washer	Rubber
Compression Nut	Brass, chrome plated


#### Part Listing:

BL3-6DL F	1/2" compression x 7/8" ballcock x 6" length
BL3-9DL F	1/2" compression x 7/8" ballcock x 9" length
BL3-12DL F	1/2" compression x 7/8" ballcock x 12" length





## **BL3 Speedi Plumb® PLUS Braided Toilet Connectors -Compression Inlet for Low Boy Toilets**

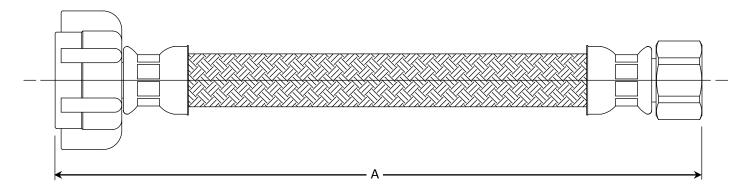

PART DIMENSIONS (Inches)			
Model	DIM. A		
BL3-6DL	6.0 / 7.0		
BL3-9DL	9.0 / 10.0		
BL3-12DL	12.0 / 13.0		

#### **Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01







