

## For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

### BWB20 .57" ID Speedi Plumb® PLUS Braided Water Heater Connectors – Female Iron Pipe x Male Iron Pipe

**Use:** For use in exposed locations only to connect water heaters and other water connected devices to the water supply. Not intended for use with recirculating water systems that produce continuous use temperatures above 115° F. For those applications use our CopperFlex™ series connectors.

**Design Features:**

- **Corrosion resistance** to harsh chemicals found in common household cleaning and plumbing repair products
- **Strong and flexible.** The polymer braid exhibits greater elasticity than stainless steel braiding, significantly increasing the flexibility of the connector
- **No kinking, no crimping.** The polymer braided jacket is specially engineered to bend freely without kinking or crimping the connector
- **Won't work harden** even with repeated bending
- **No dielectric union needed** with installation as the braiding and rubber are constructed of non-conductive materials
- **Nut provides a full thread engagement** resulting in a secure connection
- 



**Operating Specifications:**

**Temperature:** 40° to 160° F, intermittent to 180° F  
**Pressure:** water pressures up to 125 PSI maximum


CONNECTOR MATERIAL SPECIFICATIONS	
Inner Hose	Rubber
Braiding	PVC coated yarn
Barb	Brass
Ferrule	Brass
Nut	Brass
Washer	Rubber

*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*

# BWB20 .57" ID Speedi Plumb® PLUS Braided Water Heater Connectors – Female Iron Pipe x Male Iron Pipe

**Part Listing:**

- BWB20-12 .57" ID X 12" connector with 3/4" MIP x 3/4" FIP end fittings
- BWB20-15 .57" ID X 15" connector with 3/4" MIP x 3/4" FIP end fittings
- BWB20-18 .57" ID X 18" connector with 3/4" MIP x 3/4" FIP end fittings
- BWB20-24 .57" ID X 24" connector with 3/4" MIP x 3/4" FIP end fittings

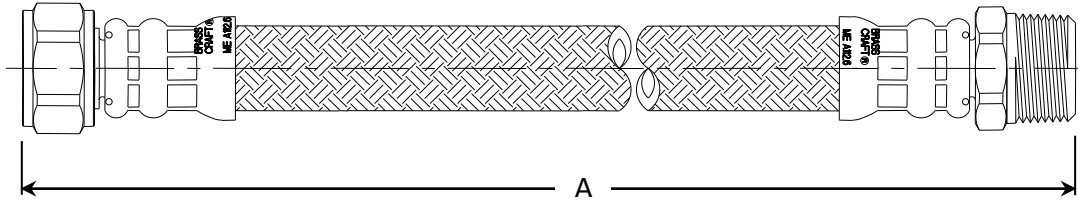

PART DIMENSIONS (Inches)					
Connector Length					
Model	DIM.	12"	15"	18"	24"
BWB20	A	12.00 / 13.00	----	18.00 / 19.00	24.00 / 25.00

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 / CSA B125.6



*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*