

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

G2CR19B160AX/ G2CR19B200AX Braided One-Piece Faucet Supply Kit - Compression 1/4 Turn Angle Stop

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculating systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series supply kits.

Design Features:

- **Easy to install.** Combines our trusted G2™ supply stop and braided water connector for an easy to install one-piece connection
-

Braided connector provides:

- **Corrosion Resistance** to harsh chemicals found in most common household cleaning and plumbing repair products
- **More flexible than stainless steel**, the braided polymer-coated fibers bend freely without kinking or crimping
- **Rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections


G2™ quarter-turn stop provides:

- **Compact machined** one-piece body design
- **Fast, reliable, secure**
- **Smooth 1/4 turn operation**
- **100% leak tested**

Operating Specifications:

Temperature: 40°- 160° F, intermittent to 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.517" OD)

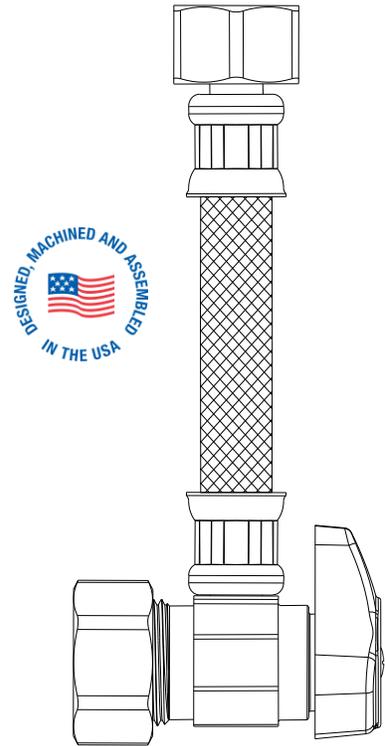

Includes 1/2" nom shallow escutcheon (see 649 submittal form for details)

CONNECTOR MATERIAL SPECIFICATIONS	
Inner Hose	Reinforced PVC
Braiding	PVC yarn
Barb	Brass
Ferrule	Steel, zinc plated
Connector Nut	Brass
Connector Washer	Rubber
Shallow Escutcheon	Stainless steel


STOP MATERIAL SPECIFICATIONS	
Body	Brass
Stem Barrel	TPE
Stem Shaft	Engineered polymer
Stem O-ring	Rubber
Handle	ABS, plated or zinc die cast, plated
Handle Screw	Steel, zinc plated
Compression Ring & Nut	Brass

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

G2CR19B160AX/ G2CR19B200AX Braided One-Piece Faucet Supply Kit - Compression 1/4 Turn Angle Stop

- G2CR19B160AX C 1/2" nom compression x 1/2" FIP outlet x 16" length braided connector, chrome finish
- G2CR19B200AX C 1/2" nom compression x 1/2" FIP outlet x 20" length braided connector, chrome finish

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
G2CR19B160A	16.50 / 17.50	2.16
G2CR19B200A	20.50 / 21.50	2.16

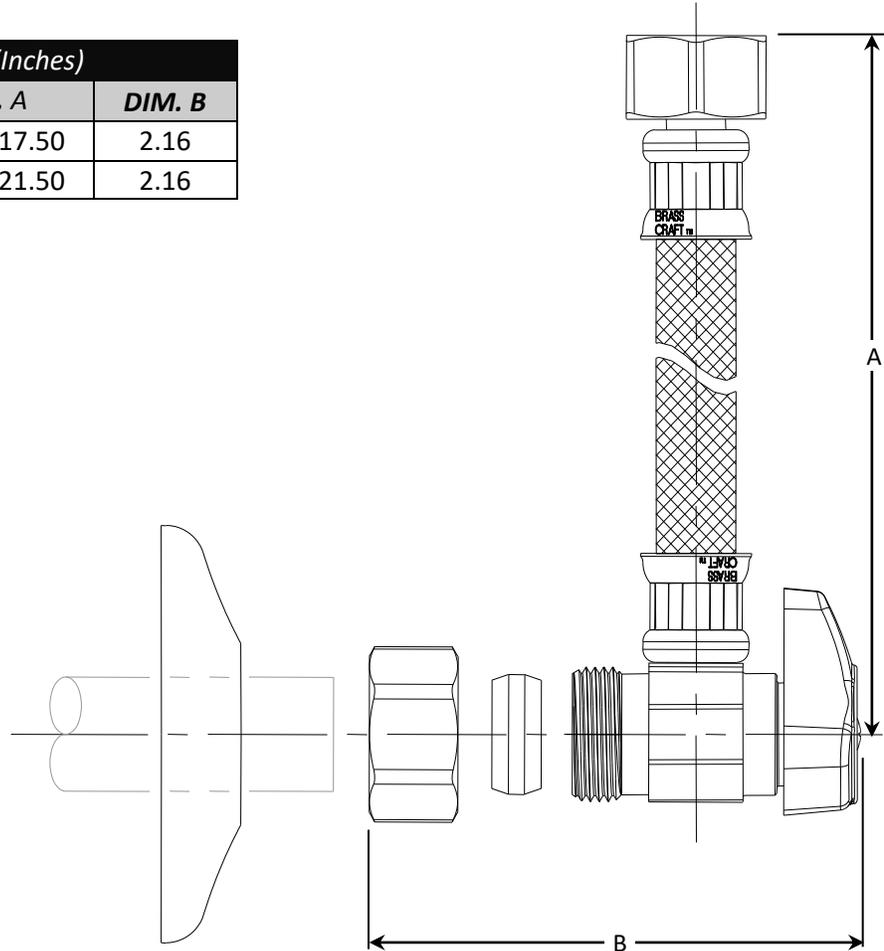

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 and NSF61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.214 G2CR19B**A Braided One-Piece Faucet Supply Kit REV 3.20

BrassCraft[®]

©2020 Brasscraft Manufacturing Company