

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

KTCS401DLX 1/4 Turn Toilet Supply Kit w/ 5" Extension – Sweat x Compression Ball Stop (Opt. Loose Key)

Use: For use with water in accessible locations only

Design Features:

- **Everything you need.** These kits combine our premium KT™ ¼ turn BrassCraft® supply stop, copper riser, extension tube, and escutcheon for an easy-to-install connection




Copper riser provides:

- **One-piece** construction
- **Cut-to-length** for a clean, professional installation

KT™ 1/4 turn ball stop provides:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Easy-to-remove handle** with screw attachment helps protect against accidental operation during rough-ins
- **Precision-machined brass ball** is specially engineered and mated with PTFE seats to provide smooth operation
- **Two high-performance o-rings** withstand high temperatures and corrosion
- **Blow-out-proof brass stem** is assembled from the inside out with two o-rings to ensure safe, reliable performance
- **Plated stem** provides corrosion resistance and prevents o-ring damage
- **Metal handle** is designed for durability, corrosion resistance, and a sleek appearance
- **100% leak tested**

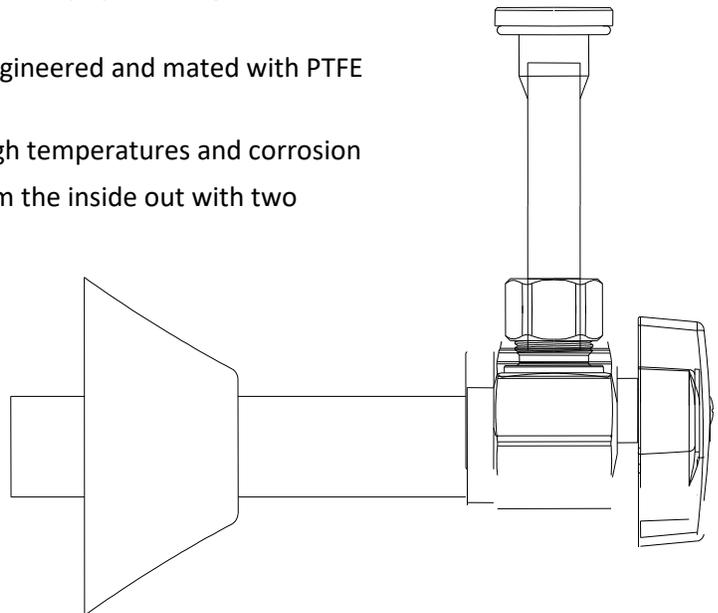

Operating Specifications:

Temperature: 40°- 180° F
Pressure: 125 PSI maximum

Tube Diameter: .38" OD

Part Listing:

- KTCS401DLX C 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome
- KTCS401DLX C 1/2" nom sweat x 3/8" OD compression w/ loose key, bell escutcheon, chrome

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



KTCS401DLX 1/4 Turn Toilet Supply Kit w/ 5" Extension – Sweat x Compression Ball Stop (Opt. Loose Key)


CONNECTOR MATERIAL SPECIFICATIONS	
Tube	Copper
Insert	TPE
Extension Tube	Copper, plated

Bell Escutcheon	Steel, plated
-----------------	---------------

Loose Key	Zinc die cast
Loose Key Adaptor	Zinc die cast
Lock Shield	Brass, plated

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Stem	Brass, plated
Handle	Zinc die cast, plated
Handle Screw	Steel, zinc plated
O-ring	Rubber
Ball	Brass, plated
Seat	PTFE
Compression Sleeve	Brass
Compression Nut	Brass, plated

PART DIMENSIONS (Inches)			
Model	DIM A	DIM B	DIM C
KTCS401DLX	12.00	5.46	1.14
KTSCS401DLX	12.00	5.46	1.29

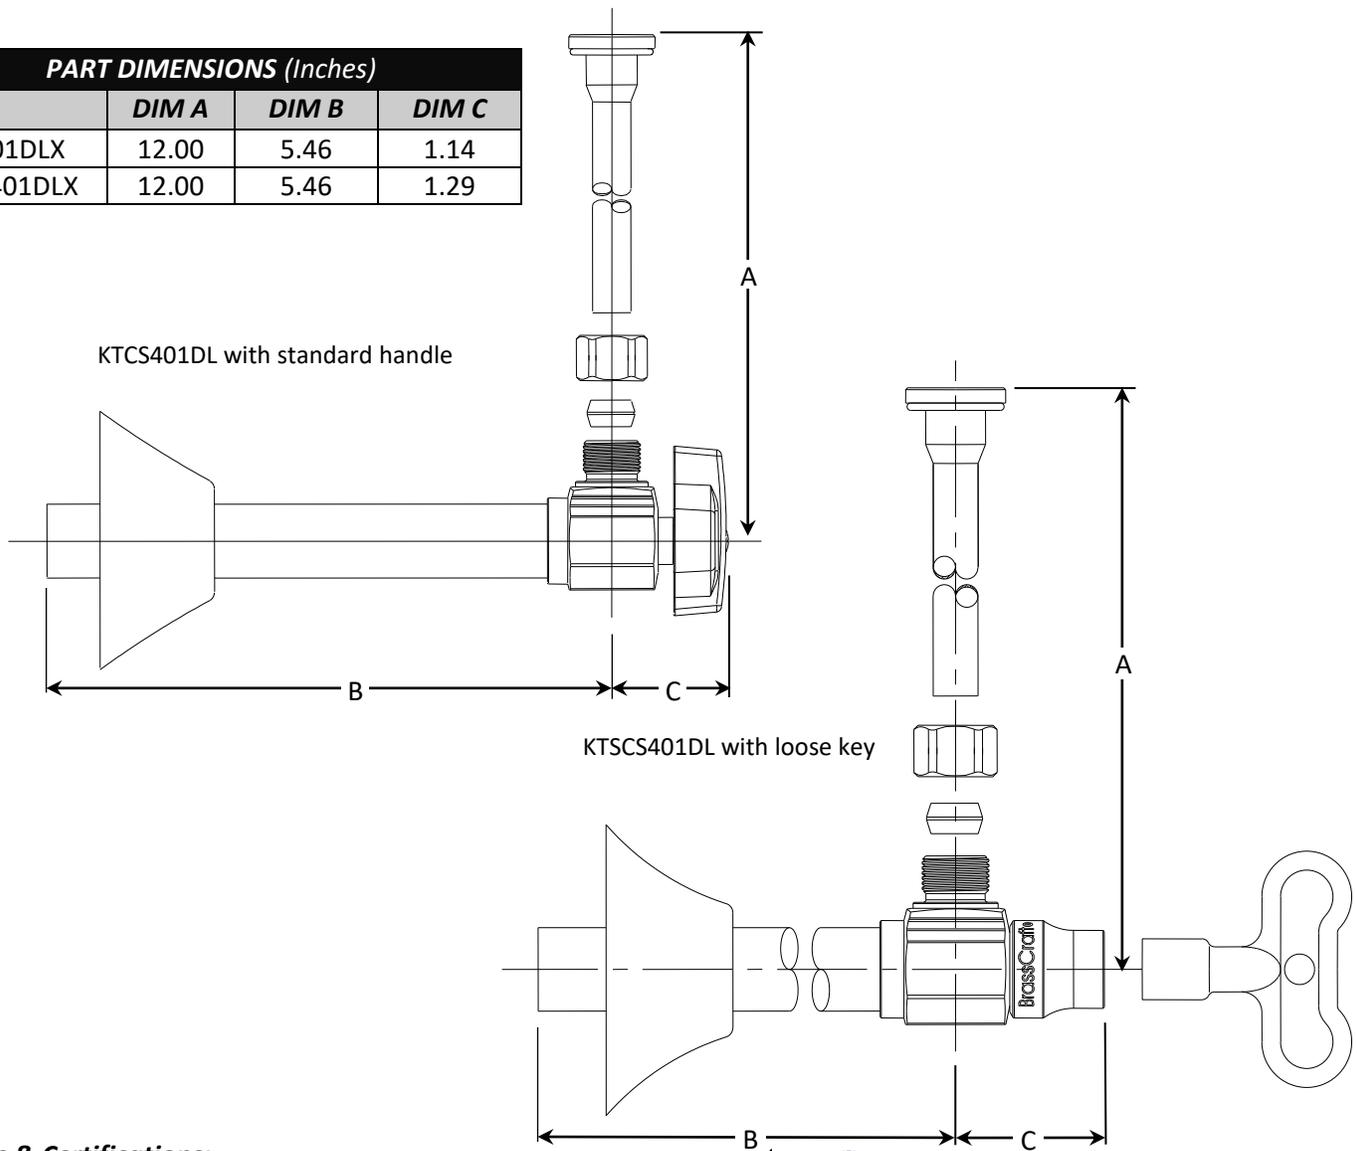

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 & NSF61)



Excludes loose key

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft[®]