Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

PLB201X 1/4 Turn Push Connect Straight Stop - Compression Outlet


Use: For use only in potable water distribution systems, hot and cold, in accessible locations only

Part Listing:

PLB201X B 1/2" nom push connect x 3/8" OD compression, chrome plated, bulk
PLB201X P 1/2" nom push connect x 3/8" OD compression, chrome plated, bagged




PART DIMENSIONS (Inches)					
Model	DIM. A	DIM. B	DIM. C		
PLB201X	2.48	1.67	.94		



Operating Specifications				
Temperature	Pressure			
Intermittent 40°- 140° F	125 PSI maximum			

MATERIAL SPECIFICATIONS		
Body	Brass, plated	
Stem	Brass	
Ball	Brass, plated	
Gripper Ring	Stainless steel	
Push Ring	POM	
Seat Ring	POM	
Lock Ring	POM	
Seats	PTFE	
O-Rings	Rubber	
Handle	ABS, plated	
Screw	Stainless steel	
Compression Nut	Brass, plated	
Compression Ring	Brass	
Tube Stiffener	Plastic	
Adapter	Brass, plated	

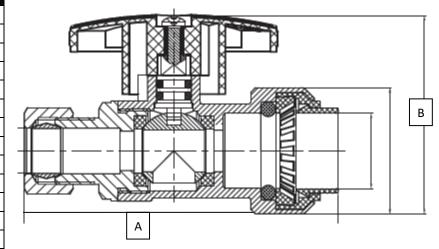

Listings & Certifications:

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF61)



