# For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

#### PSPC61CP **Push Connect Cap**

Use: For use only in potable water distribution systems, hot and cold applications

### Part Listing:

PSPC61CP-8X P	3/8" push connect cap, bagged
PSPC61CP-10X P	1/2" push connect cap, bagged
PSPC61CP-14X P	3/4" push connect cap, bagged
PSPC61CP-18X P	1" push connect cap, bagged
PSPC61CP-22X P	1-1/4" push connect cap, bagged
PSPC61CP-26X P	1-1/2" push connect cap, bagged

PSPC61CP-34X P 2" push connect cap, bagged


#### **Design Features:**

- Efficient way to cap off copper, PEX, or CPVC
- No soldering, clamps, unions, or glue required
- Removable
- Used in wet or dry installations
- Approved for behind the wall and underground use\*
- 25 year limited warranty

PART DIMENSIONS (inches)					
Model	DIA. A	DIM. B			
PSPC61CP-8X	.87	.83			
PSPC61CP-10X	1.06	1.06			
PSPC61CP-14X	1.31	1.18			
PSPC61CP-18X	1.65	1.26			
PSPC61CP-22X	2.09	1.46			
PSPC61CP-26X	2.48	1.65			
PSPC61CP-34X	3.03	1.81			

Operating Specifications		
Temperature	Pressure	
33°- 180° F	200 PSI maximum	

MATERIAL SPECIFICATIONS			
Body	Low lead brass		
O-ring	EPDM		
Backer Ring	Polypropylene		
Gripper Ring	Stainless steel		
Removal Flange	Polypropylene		
Tube Support	POM		

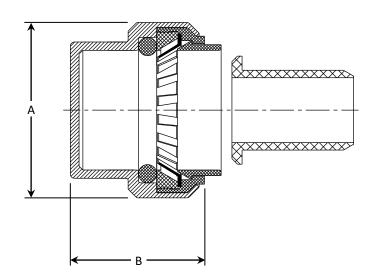

## **Listings & Certifications:**





This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



<sup>\*</sup>Please consult with local code for final approval