### For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

## S0-\*\*IM Stainless Steel Flexible Braided Ice Maker Water Connector - Compression Inlet

*Use:* For use in potable water distribution systems in accessible locations only

#### **Design Features:**

- Plated brass nuts for durability
- Rubber washer ensures a universal fit and long lasting water-tight connection
- 8-sided pneumatic crimp ensures realible nut-to-hose connection
- No Lead



**Temperature:** 40°- 140° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.245" ID (0.365" OD)

MATERIAL SPECIFICATIONS				
Inner Hose	Cross-linked polyethylene			
Braiding	Stainless steel wire			
Barb	Brass			
Ferrule	Steel, zinc plated			
Washer	Rubber			

**Brass** 

### Part Listing:

**Compression Nut** 

S0-12IM F	1/4" compression x 1/4" compression x 12" length
S0-12IM D	1/4" compression x 1/4" compression x 12" length, carded
S0-12IM DL	1/4" compression x 1/4" compression x 12" length, carded
S0-24IM F	1/4" compression x 1/4" compression x 24" length
S0-48IM F	1/4" compression x 1/4" compression x 48" length
S0-60IM F	1/4" compression x 1/4" compression x 60" length
S0-60IM P	1/4" compression x 1/4" compression x 60" length, bagged
S0-60IM PL	1/4" compression x 1/4" compression x 60" length, bagged
S0-72IM F	1/4" compression x 1/4" compression x 72" length
S0-84IM F	1/4" compression x 1/4" compression x 84" length
S0-96IM F	1/4" compression x 1/4" compression x 96" length

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.






# **S0-\*\*IM** Stainless Steel Flexible Braided Ice Maker Water **Connector - Compression Inlet**

Part	Listing (con't):	
	S0-120IM F	1/4" compression x 1/4" compression x 120" length
	S0-120IM P	1/4" compression x 1/4" compression x 120" length, bagged
	S0-120IM PL	1/4" compression x 1/4" compression x 120" length, bagged
	S0-240IM P	1/4" compression x 1/4" compression x 240" length, bagged
	S0-240IM PL	1/4" compression x 1/4" compression x 240" length, bagged

PART DIMENSIONS (Inches)				
Model	DIM. A	DIM. B		
S0-12IM	12.0 / 12.5			
S0-24IM	24.0 / 24.5			
S0-48IM	48.0 / 48.5			
S0-60IM	60.0 / 60.5			
S0-72IM	72.0 / 72.5	.56		
S0-84IM	84.0 / 84.5			
S0-96IM	96.0 / 96.5			
S0-120IM	120.0 / 120.5			
S0-240IM	240.0 / 240.5			

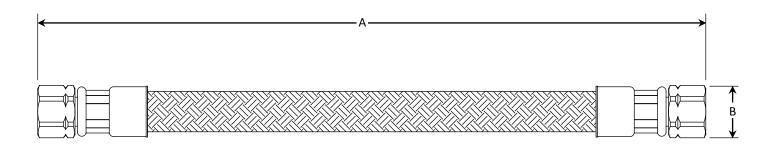

#### **Listings & Certifications:**

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No-lead product CSA listed to NSF 372 (Class 6853-01)











This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

